

TARGET

*A new game to play
on your Elf computer*

BY RON BURCH

THIS short program for the Elf computer plays a game called Target. In this game, 10 "targets" are displayed on the video screen in successive order. The target byte is selected either by keying it in via the hex keypad, or by setting the toggle switches to that byte.


When a target is displayed, the intent is to depress the INPUT switch at that instant. If you were fast enough, the Q LED will glow and 00 will replace the target byte. Play is resumed by depressing the INPUT switch. If you miss the target, the display continues sequencing.

To create the game, enter the pro-

gram shown in the Table. Addresses 0007 and 0018 limit the number of targets to 10, while addresses 001B and 001E control the speed of the moving targets. If you desire a self-loading 1 to 9 target sequence, replace the first 20 bytes of the program with:

F8 A0 A1
F8 00 A2
F8 09 A3
12 82
51 11
23 83
3A 09
C4 C4 C4

PROGRAM			
Address	Op Code	Address	Op Code
0000	F8 A0 A1		F8 05 B6
	F8 90 A2		26 96
			3A 41
	37 09		37 28
	3F 0B	0047	7B
	E1 6C 64	0048	F8 00 51
	23 83		64 21
	3A 09		37 4D
	F8 A0 A1		3F 4F
	F8 0A A3		7A
	F8 08 B4	0052	30 28
	F8 00 A4		
	64 21		
	24 94		
	3A 22		
	30 2F		
	0026 0028	11	
23 83			
3A 1A			
30 14			
E2 6C			
E1 F5			
3A 28			
F8 FF A7			
27 87			
32 28			
3F 38			

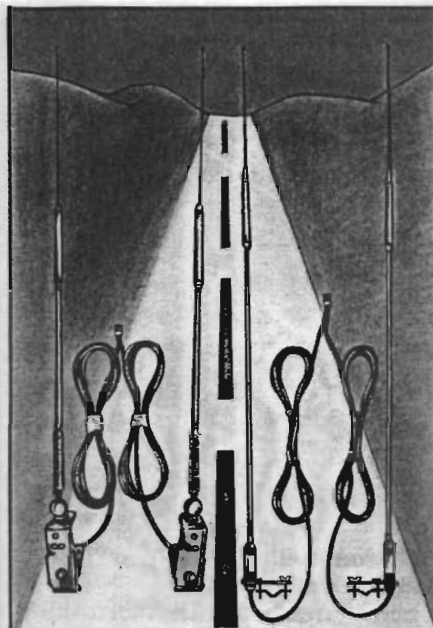

HUSTLER — STILL THE LEADER IN DUAL CB ANTENNA SYSTEMS

Since introducing the industry's first dual CB antenna systems, Hustler has continually led the way in the development of these advanced designs.

Today, Hustler offers you the widest selection of quality dual CB systems available. Whether you're behind the wheel of the family car, RV, or a long-haul semi, a Hustler dual antenna system will give you a signal pattern unmatched in uniformity. Total electrical and mechanical reliability. Freedom from fading and blind spots when you change direction, and twice the signal capture area.

Hustler dual antenna systems feature professional-quality components: heavy chrome plated mounts, oversized "Hi-Q" resonators, superflex stainless steel radiators, dual phasing harnesses with balanced power feed, and much more...

For a consistently clear channel any way you turn, you can't surpass dual CB antenna systems by the original: Hustler — still the standard of performance.

HUSTLER[®]

3275 North "B" Avenue
Kissimmee, Florida 32741

An **AMTRON** Company