


# MICRO™

*Advancing Computer Knowledge*

## Operating Systems

-  **OS-9**  
The Best OS for 6809 Microprocessors
-  **PASCAL**  
Machine Level Read and Write
-  **APPLE DOS**  
Improve Your Apple With A New OS
-  **Color Disk OS**  
Restore A Crashed Disk  
Recover Your Directory

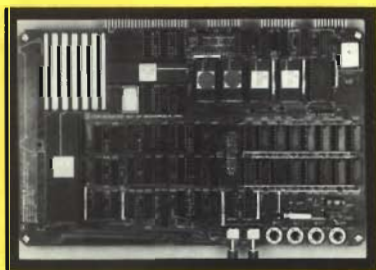


**The 68000 Educational Board Reviewed  
Redesign Your PET Calculator Keyboard  
Atari Program Perfects Calibration**

## In this month's Learning Center:



**Music, Music,  
Music — with VIC  
Player**

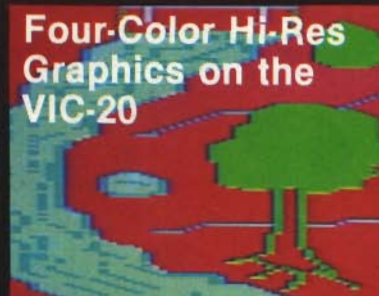

**Four-Color Hi-Res  
Graphics on the  
VIC-20**



**A Lightpen for the  
Atari, VIC-20 and  
C64**




**BUY A BANANA.  
SAVE A BUNCH.  
MORE TO COME.**



Leading Edge Products, Inc., 225 Turnpike Street, Canton, Massachusetts 02021.  
Call: toll-free 1-800-343-6833; or in Massachusetts call collect (617) 828-8150. Telex 951-624.

# DISCSAVERS

VINYL PROTECTIVE DISK SLEEVES

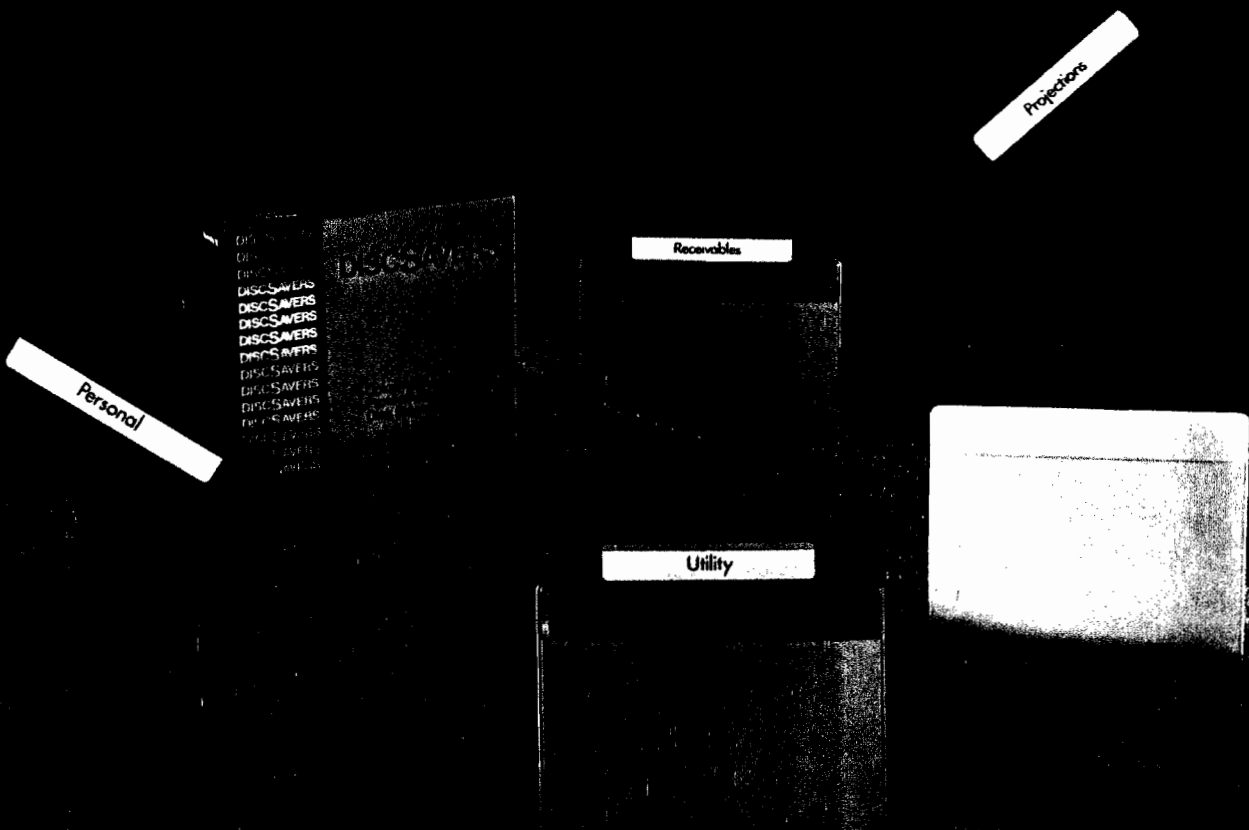

**COLOR CODED:** Multi-color DiscSavers™ are designed for easy recognition of individual disks with your own color-keyed filing system. Ideal for office or home use.

**PROTECTIVE:** Custom grain vinyl provides added protection for magnetic disks by guarding against common handling hazards.

**ATTRACTIVE:** DiscSavers provide a handsome and professional method of single disk storage and enhance the look of your hardware while protecting your valuable software.

Circle No. 1

**DURABLE:** Rigid vinyl construction protects against constant handling to ensure long wear and tear.

**PORTABLE:** DiscSavers are the only portable vinyl disk sleeves for use with a single diskette that bear the RockRoy mark of quality.

Contact your Dealer or Distributor.



Computer Products Division

7721 E. Gray Road  
Scottsdale, Arizona 85260  
(602) 998-1577  
Toll-Free 800-528-2361

# ...and so there were keys for the Atari 400.



**I**n the beginning there was the membrane keyboard.

So it was to be done that Inhome Software would create a full-stroke keyboard for the Atari 400 Home Computer and it would be called the B Key 400, and would sell for ~~\$119.95~~ U.S. funds. (Now just \$44.95)

The new B Key 400 was made so easy to install that the owner could do it himself in a miraculous two minutes.

With the B Key 400 keyboard from Inhome Software, you will follow into the land of professional home computers that are powerful, easy to program and have a great capacity that can be made even greater with Inhome Software 48K and 32K memory boards. It was done and it was good.

**INHOME**  **SOFTWARE**

Inhome Software Incorporated, 2485 Dunwin Drive, Mississauga, Ontario L5L 1T1. (416) 828-0775. Made in Canada.

ATARI is a registered trademark of ATARI, USA.

No. 61 - June 1983

MICRO

Circle No. 2

1

# MICRO™

## Highlights

Your computer system is only as good as your operating system. New operating systems coming on the market provide the consumer with products that are more powerful and easier to use than most earlier versions. The June issue of MICRO takes a look at some of these operating systems including OS-9 and Motorola's MEX68KECB educational computer board. Our feature section will help you learn about many of these exciting new items and enable you to choose the right options for your particular needs and computer system.

We open our feature section with an article by Phil Daley entitled "Apple Operating Systems" (pg. 20). Phil discusses operating systems that can be used with both unmodified Apples and with those requiring additional hardware. All the systems use standard DOS 3.3 format disks. Steven Lesh, in "U.C.S.D. Directory" (pg. 26) examines the U.C.S.D. directory at the byte and bit level rather than in the usual terms of high-level language data structures. Included is a brute-force method of accessing U.C.S.D. directory blocks.

"OS-9, A Structured Operating System" by Mark Boyd (pg. 32) is a summary of OS-9, one of the most powerful systems for an 8-bit microprocessor. MICRO follows up on Mark's article with "A Unix-Like Operating System for the 6809 Microcomputer, Part 1" by Steve Childress (pg. 46). Steve discusses the "power-per-dollar" of hardware as yet untapped due to manufacturers' fears of software incompatibility. Steve claims OS-9 is a new way to view software architecture that is beneficial to the small-computer user.

William Clements reviews the Color Computer disk system, examines disk sectors, and explains how to repair a crashed directory in "Comments/Utilities on Color Disk BASIC" (pg. 34). And finally, to complete our feature section see Terry Jackson's "A Review of the 68000 Educa-


tional Board" (pg. 42), an overview of Motorola's new 68000 educational computer board.

In our applications section we have three articles designed to assist you in problem solving. First, if you are building remote sensors for a personal computer you may encounter trouble calibrating the homebrew sensors. See Mike Dougherty's program "Calibrating by Least Squares Polynomials" (pg. 54), which allows a set of calibration data points to be fitted with a least squares polynomial. "Pinewood Derby with Computer Timing" by Sidney

Koegler (pg. 60) eliminates the arguments and frustrations of judging the Boy Scouts' Pinewood Derby! Here is an automated timing and judging program that uses photo-sensors installed at the finish line. For those of you who feel helpless when converting BASIC decimal results to fractions, Dr. LeRoy Moyer has written a program that automates such calculations in "Fractionated BASIC" (pg. 64).

This month the Learning Center provides you with three programs that educate and entertain. Brian Zupke teaches you how to use the VIC's joystick to draw high-resolution pictures in four different colors. Study "Four-Color Hi-Res Graphics" (pg. 70). Do you dream of becoming a *note-able* musician? Phil Daley's "VIC Player" (pg. 72) is a five-octave keyboard on which you can compose your own tunes or play old favorites while learning music programming. And David Bryson shows you how to construct a lightpen for approximately \$15.00 and two hours of work. Read "An Inexpensive Lightpen for the VIC-20, C64, and Atari" (pg. 82).

Our machine-language utilities include the continuation of Joe Hootman's series on "68000 Instructions" (pg. 88) and Randy Hyde's "Parameter Passing, Part 2" (pg. 94). Also included is Bob Sullivan's "HEXPAD: Utility for M/L Key-ins" (pg. 90).

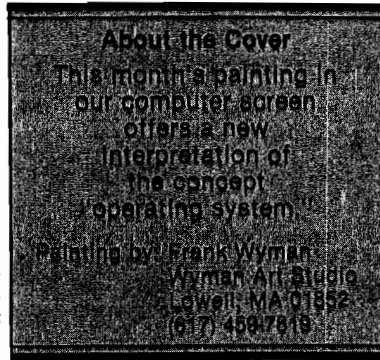

### IS THERE LIFE AFTER BASIC ? YES ! WITH... COLORFORTH™

**MOVE UP FROM BASIC!** Forth is a new, high level language available now for the TRS-80® Color Computer. **COLORFORTH**, a version of fig FORTH, has an execution time as much as 10 to 20 times faster than Basic, and can be programmed faster than Basic. **COLORFORTH** is highly modular which make testing and debugging much simpler. **COLORFORTH** has been specially customized for the color computer and requires only 16k. It does not require Extended Basic. When you purchase **COLORFORTH**, you receive both cassette and RS/DISK versions, the standard fig EDITOR and an extensive instruction manual. Both versions and 75 page manual . . . . . \$49.95


Add \$2.00 shipping

Texas residents add 5 percent

DEALER AND AUTHOR INQUIRIES INVITED

Circle No. 3

**ARMADILLO INT'L SOFTWARE**  
P. O. Box 7661  
Austin, Texas 78712



Phone (512) 459-7325

**NEW LOWER PRICES**

	<b>ASHTON TATE</b>
dBASE II	\$489.00
BOTTOM LINE STRATEGIST	279.00
	<b>C.I.TOH</b>
PROWRITER PARALLEL	399.00
F-10 55	1799.00
F-10 PARRALLEL/SERIAL	1359.00
GRAPPLER INTERFACE	125.00
PROWRITER II	789.00
	<b>CALIFORNIA COMPUTER SYSTEMS</b>
ASYNCHRONOUS INTERFACE	\$129.00
SYNCHRONOUS INTERFACE	149.00
CALENDAR CLOCK	105.00
RS232 INTERFACE	124.00
PROGRAMMABLE TIMER FOR APPLE	99.00
	<b>COMSHARE TARGET MARKETING</b>
PLANNER CALC	\$79.00
TARGET FINANCIAL MODELING	249.00
	<b>CONTINENTAL SOFTWARE</b>
HOME ACCOUNTANT FOR APPLE	\$59.00
HOME ACCOUNTANT FOR IBM	109.00
	<b>DICTRONICS, INC.</b>
RANDOM HOUSE ELECT. THESAURUS	\$129.00
PROOF READER	50.00
	<b>EAGLE</b>
MONEY DECISIONS	\$99.00
	<b>FORCE II</b>
MATH*	\$89.00
	<b>FOX &amp; GELLER</b>
dUTIL	\$68.00
QUICK CODE FOR dBASE II	219.00
QUICKSCREEN	129.00


**CALL TOLL-FREE  
1-800-523-9511  
IN PENNSYLVANIA  
1-215-868-8219**

	<b>T/MAKER COMPANY</b>
T/MAKER III	\$199.00
	<b>VIDEX</b>
ENHANCER II	129.00
VIDEX KEYBOARD ENHANCER	129.00
VIDEX VIDEOTERM FOR APPLE II	269.00
	<b>VISICORP</b>
DESKTOP PLAN APPLE II	\$179.00
DESKTOP PLAN IBM	228.00
VISICALC	179.00
VISICALC ADVANCED VERSION	CALL
VISICALC BUSINESS FORECASTING	89.00
VISIFILE APPLE II/IBM	CALL
VISILINK	184.00
VISILOT FOR APPLE	159.00
VISITREND/VISILOT	228.00

IBM IS A TRADEMARK OF INTERNATIONAL BUSINESS MACHINE, APPLE IS A REGISTERED TRADEMARK OF APPLE COMPUTERS, INC., CROSSTALK IS A TRADEMARK OF MICROSTUFF, INFOTAR IS A TRADEMARK OF MICROPRO. PRICES, SPECIFICATIONS AND AVAILABILITY SUBJECT TO CHANGE WITHOUT NOTICE. NOT ALL PROGRAMS AVAILABLE IN ALL FORMATS. PLEASE CALL FOR ADDITIONAL PRODUCT INFORMATION.

MICROHOUSE  
P.O. Box 499/1444 Linden Street  
Department 302  
Bethlehem, PA 18016  
Dealers Inquiries welcome!

	<b>INTEGRAL DATA SYSTEMS</b>
IDS MICROPRISM 480 PRINTER	\$589.00
IDS PRISM-132 PRINTER	1279.00
IDS PRISM-80 PRINTER	999.00
	<b>INTERACTIVE STRUCTURES</b>
PKASSO	\$135.00
	<b>INNOVATIVE SOFTWARE, INC.</b>
TIM III	\$359.00
GRAPHMAGIC	69.00
MATHEMAGIC	69.00
	<b>INFORMATION UNLIMITED SYSTEMS</b>
EASYFILER	\$349.00
EASYSPELLER	159.00
EASYWRITER II	279.00
	<b>MAXELL</b>
FD-1 or FH-1-32 (8" SINGLE SIDED)	\$39.00
FD-2 (8" DOUBLE SIDED)	49.00
MD-1 or MH-1 (5 1/2" SINGLE SIDED)	31.00
MD-2 or MH-2 (5 1/2" DOUBLE SIDED)	48.00
	<b>MICROPRO</b>
CALCSTAR	\$99.00
DATASTAR	165.00
MAILMERGE	149.00
WORDSTAR	279.00
WORDSTAR/MAILMERGE	349.00
	<b>MICROSOFT</b>
128K RAM FOR IBM PC	\$389.00
BASIC COMPILER FOR APPLE II	289.00
128K RAMCARD	389.00
192K RAMCARD	519.00
256K RAMCARD	659.00
64K RAMCARD	259.00
MICROSOFT Z80 PREMIUM PACK	489.00
MICROSOFT Z80 SOFTCARD	249.00
MULTIPLAN	199.00
TASC APPLESOFT COMPILER	129.00
	<b>NORTH AMERICAN BUSINESS SYSTEMS</b>
THE ANSWER	\$229.00
	<b>PEACHTREE</b>
ACCOUNTS PAYABLE	CALL
ACCOUNTS RECEIVABLE	CALL
GENERAL LEDGER	CALL
INVENTORY	CALL
PAYROLL	CALL
SALES INVOICING	CALL
	<b>PERFECT SOFTWARE</b>
PERFECT CALC	\$139.00
PERFECT FILER	199.00
PERFECT SPELLER	139.00
PERFECT WRITER	199.00
	<b>QUADRAM</b>
128K MEMORY EXPANSION	\$380.00
192K MEMORY EXPANSION	475.00
64K MEMORY EXPANSION	280.00
64K MEMOY UPGRADE	129.00
MICROFAZERS ALL MODELS	CALL
QUADBOARD 64K	459.00
QUADBOARD 128K	599.00
QUADBOARD 192K	699.00
QUADBOARD 256K	779.00
	<b>CONTROLLER FOR ELITE I</b>
RANA ELITE I	\$99.00
RANA ELITE II	299.00
RANA ELITE III	465.00
	<b>SMITH-CORONA</b>
SMITH-CORONA TP-1	\$599.00
	<b>SORCIM</b>
SUPERCALC BY SORCIM	\$219.00
SPELLGUARD	189.00

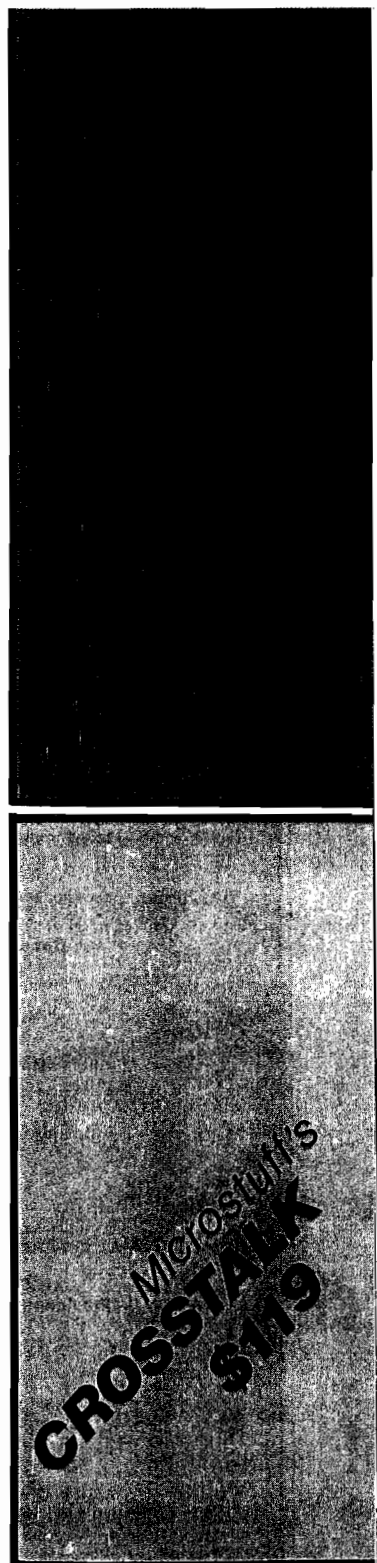

**MICROHOUSE™**

**YOUR MICRO-COMPUTER PEOPLE**

Circle No. 4

# MICRO™

Advancing Computer Knowledge

MICRO  
P.O. Box 6502  
Amherst, NH 03031  
(603) 889-4330

**Managing Editor**  
Marjorie Morse

**Technical Editors**  
Phil Daley  
Loren Wright

**Assistant Editor**  
Emmalyn H. Bentley

**Office Mgr./Editorial Assistant**  
Maureen Dube

**Programming**  
John Hedderman

**Contributing Editors**  
Cornelis Bongers  
Dave Malmberg

John Steiner  
Jim Strasma  
Paul Swanson  
Richard Vile

**Art Director/Production**  
Helen Bergeron

**Typesetter**  
Lynda Fedas

**Advertising**  
Sales Manager—Bob Mackintosh  
Admin. Assist.—Dawn Blute

**Dealer Sales**  
Sales Manager—Kathie Maloof  
Linda Hensdill

**Circulation**  
Carol A. Stark  
Cindy Schalk

**Accounting**  
Donna M. Tripp

**President/Editor-in-Chief**  
Robert M. Tripp

**Publisher**  
John G. Grow

**Associate Publisher/  
Circulation Manager**  
Nancy Lapointe

MICRO is published monthly by MICRO, Amherst, NH 03031. Second Class postage paid at Amherst, NH 03031 and additional mailing offices. USPS Publication Number 483470. ISSN: 0271-9002. Send subscriptions, change of address, USPS Form 3579, requests for back issues and all other fulfillment questions to MICRO, 10 Northern Blvd., P.O. Box 6502, Amherst, NH 03031, or call (603) 889-4330; Telex: 955329 TLX SRVC, 800-227-1617. *Subscription rates (per year):* U.S. \$24.00, \$42.00 / 2 yr. Foreign surface mail \$27.00. Air mail: Europe \$42.00; Mexico, Central America, Middle East, North Africa, Central Africa \$48.00; South America, South Africa, Far East, Australasia, New Zealand \$72.00. Copyright © 1983 by MICRO. All Rights Reserved.

## Operating Systems

### 20 APPLE II Operating Systems

*Phil Daley* — A look at the features offered by six popular systems

### 26 UCSD Directory

*Steven Lesh* — A description of UCSD at the byte and bit level

### 32 OS-9, A Structured Operating System

*Mark J. Boyd* — One of the most powerful systems for 8-bit microprocessors

### 34 Color Disk BASIC: Observations and Utilities

*Michael Dudgeon and William Clements, Jr.* — Examine disk sectors and repair a crashed directory

### 42 The 68000 Educational Computer Board

*Terry A. Jackson* — Motorola's board features 32K of RAM and a terminal-based ROM monitor

### 46 A UNIX-like Operating System for 6809 Microprocessors

*Stephen L. Childress* — A new view of software architecture

BA00	7F	C1	1	1	1	1	SysGo
BA7F	193	E1	1	1	1	8	ACIA
BC12	38	F1	1	1	1	2	TERM
BC4A	651	C1	1	1	1	1	IOMAN
C29B	BBC	D1	1	1	1	1	RBF
CE57	41C	D1	1	1	1	8	SCF
D273	33A	E1	1	1	1	1	DC3
D5AD	2C	F1	1	1	1	1	DD
D5D9	2E	F1	1	1	1	1	H0
D608	36	F1	1	1	1	6	T1
D63E	216	E1	1	1	1	1	WD1000
D654	CA	C1	1	1	1	1	CLOCK
D91E	472	11	1	1	1	2	Shell
DD90	2E	11	1	1	1	1	Load
DBBE	48	11	1	1	1	1	Unlink
AG00	1DA	11	1	1	1	1	Mdir



## Applications


### 54 Calibration by Least Squares Polynomials on the Atari

*Mike Dougherty* — Correct calibration problems in your home-built computer sensors


### 60 Pinewood Derby with Computer Timing

*Sydney S. Koegler* — An automated judging and timing program for this popular Cub Scout model car race

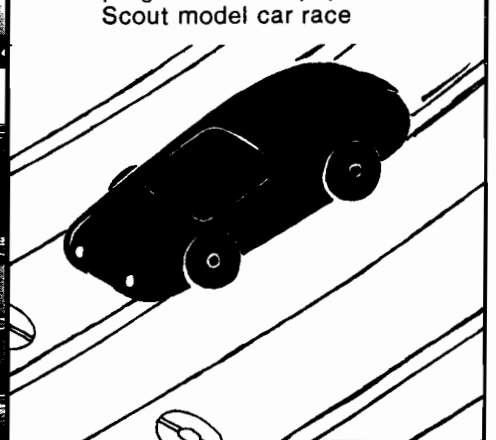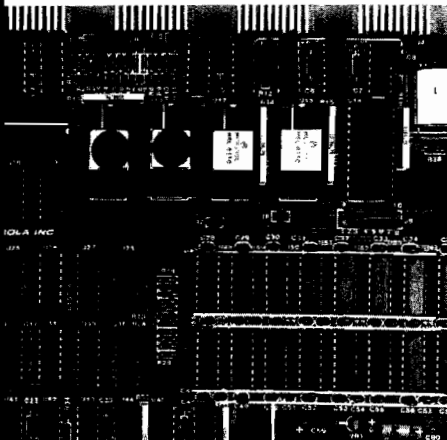


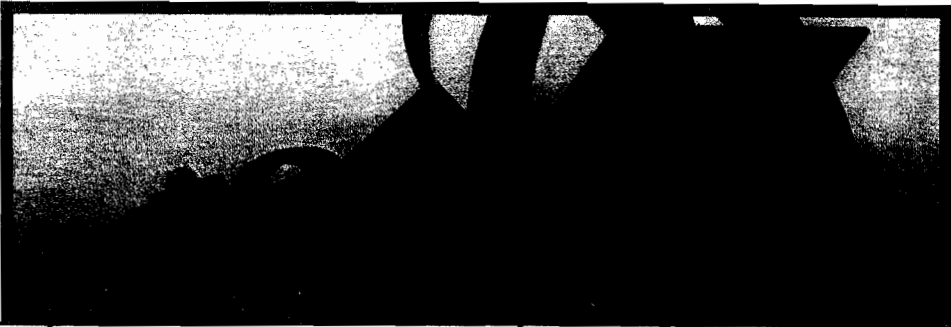

- 64 Fractionated BASIC**  
*LeRoy Moyer* — Automate fraction calculation

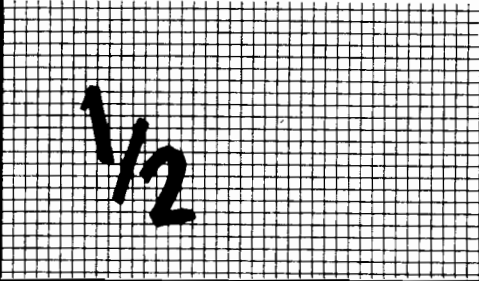

- 82 An Inexpensive Lightpen for the VIC-20, C 64, and Atari**  
*David A. Bryson* — Construct a lightpen for only \$15.00

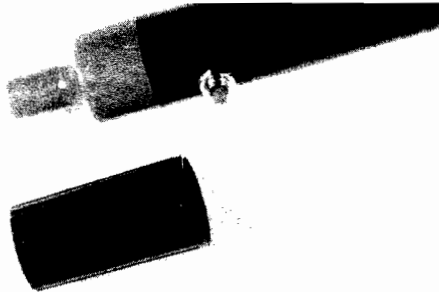


## Columns

- 10 PET Vet**  
*Loren Wright* — A review of the Script 64 and WordPro 3 Plus/64 wordprocessors




- 14 From Here to Atari**  
*Paul Swanson* — The InHome keyboard for the Atari 400, Atari 1200XL map modes, and more

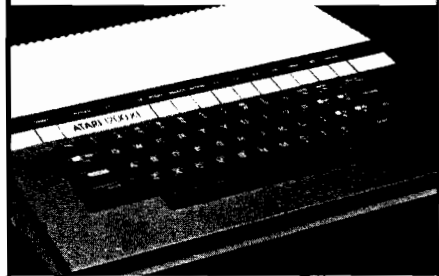


## The Learning Center

- 70 Four-Color Hi-Res Graphics for the VIC-20**  
*Brian S. Zupke* — Use the joystick to draw four-color pictures

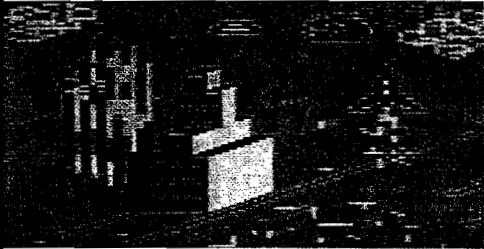

- 72 VIC Player**  
*Phil Daley and Bob Tripp* — Learn music with this five-octave keyboard program

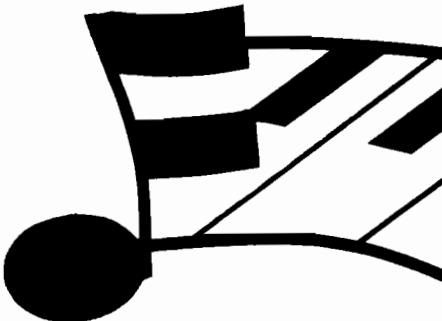

## Machine Language Aids

- 88 68000 Addressing Modes**  
*Joe Hootman* — Immediate, direct, implied, and indirect addressing
- 90 HEXPAD: PET Utility for Machine-Language Key-Ins**  
*Bob Sullivan* — Redesign your PET calculator keyboard

7	8	9	/
4	5	6	×
1	2	3	+
0	.	-	=

- 94 Parameter Passing in Assembly Language, Part 2**  
*Randall Hyde* — Passing parameters via the Return Address

- 18 CoCo Bits**  
*John Steiner* — More information on video output

- 98 Interface Clinic**  
*Ralph Tenny* — A discussion on interface components — the latch and shift register

## Departments

- 2 June Highlights
- 7 Editorial
- 8 Letters/Updates/Microbes
- 51 Data Sheet
- 106 Software Catalog
- 114 Hardware Catalog
- 118 Reviews in Brief
- 124 6809 Bibliography
- 128 Advertiser's Index



**286K  
per 3"  
disk  
cartridge!**

-- PRESS RETURN KEY TO BEGIN COPY --



## **AFTER YOUR FIRST DRIVE GO WITH AMDISK.**

The AMDISK-I Micro-floppy disk system is an engineering breakthrough in disk size, storage capacity, media protection and user convenience. It's fully compatible with your Apple II\* and Apple IIe and is furnished with an interconnect cable. Enjoy a full 286K storage† capability and the extra convenience of the new 3" hard plastic encased diskette. Packed 10 per box, the disk cartridge fits into a shirt pocket and is easy to mail.

**Suggested Retail Price . . . . \$299 (3" cartridge \$6.99 ea.)**

The Amdisk Single Drive system is ruggedly constructed for years of trouble-free operation and is backed with our 90 day warranty on parts and labor.

Just circle the reader service number for complete specifications.

\* Apple II is a registered trademark of Apple Computer, Inc.  
† Requires recording on both sides

2201 Lively Blvd. • Elk Grove Village, IL 60007  
(312) 364-1180 TLX: 25-4786



**Amdek . . . your guide to innovative computing!**

**M**y favorite computer dictionary offers this definition of an operating system: 1. An organized collection of techniques and procedures for operating a computer. 2. A part of a software package (program or routine) defined to simplify housekeeping as input/output procedures, sort-merge generators data-conversion routines, or tests.

Now you ask, "OK, but what *really* is an operating system?" Unfortunately the definition will not get much clearer. If you are technically oriented and know your computer inside as well as out, you don't need a better definition because you already have a good understanding of operating systems. But, if you're still in a fog, read the articles in our feature section beginning on page 20.

Of course, whatever your level of knowledge, we all know that the operating system is crucial to the running of any computer. The reason we have problems using different software on different computers is that the operating systems aren't compatible. The logical solution seems to be to provide a standard operating system that could run on many different computers. Some steps are being taken in this direction.

As you read through this issue you'll notice that operating systems are usually developed for a particular chip or by a company for its computers. The

6502 world, where there is no standardization, provides the most problems; you'll find Commodore BASIC, Atari BASIC, Atari DOS, Apple DOS, and more. For the most part, 6809-based computers are standardized to FLEX or OS-9, and UNIX is becoming a standard for 68000-based machines.

When you get involved with computers based on the Z80, 8086, etc., you'll find that CP/M is supported by virtually all of these computers. Because all the machines use one operating system, more software is available for these machines than those based on other microprocessors. As a result, many of the manufacturers of the new computers have chosen the Z80 or 8086. And, manufacturers of 6502 microprocessors are beginning to plan for CP/M compatibility on their machines. For instance, Commodore has made provisions for the Z80 or 8086 on their C 128, although neither option is yet available. There will be a Z80 cartridge for the Commodore 64, too. A Z80 card is available for the Apple, as well as a 6809 card, which will allow for CP/M, OS-9, and FLEX.

*Marjorie Morse*

Marjorie Morse  
Managing Editor

### MICRO Moves North!

Our new address is: 10 Northern Blvd., Northwood Executive Park  
P.O. Box 6502  
Amherst, NH 03031  
Our new phone number is: (603) 889-4330

**Computer  
Case  
Company**



Attache-style cases for carrying and protecting your complete computer set-up. Accommodates equipment in a fully operational configuration. Never a need to remove equipment from case. Simply remove lid, connect power, and operate.

AP101	Apple II with Single Drive	\$109
AP102	Apple II with Two Disk Drives	119
AP103	Apple II, 9 Inch Monitor & Two Drives	129
AP104	Apple III, Two Drives & Silentyper Printer	139
AP105	13" Monitor with Accessories	99
AP106	AMDEK Color Monitor	119
RS201	TRS-80 Model I, Expansion Unit & Drives	109
RS204	TRS-80 Model III	129
AT301	ATARI Computers with Peripherals	109
P402	Centronics 730/737 & Radio Shack Printer	89
P403	Epson MX70/80 or Microline 82A	89
P404	Epson MX100 Printer	99
P405	IDS 560 or Prism 132 Printer	109
P406	Starwriter/Printmaster F-10 Printer	119
P407	Okidata Microline 83A or 84 Printer	99
P408	Prowriter 2 Printer	99
P409	Prowriter (Apple Dot Matrix) Printer	89
IB501	IBM Personal Computer	129
IB502	IBM Monitor	99
HP601	HP41 with Accessories	99
CM703	Commodore Model 64 with Drives	119
CM704	Commodore Model 64 with Dataset	109
NS010	North Star Advantage	139
CC80	Matching Attache Case (5")	85
CC90	Matching Attache Case (3")	75
CC91	Matching Accessory Case	95
CC92	5.25" Diskette Case	49

**computer case company**

5650 Indian Mound Court  
Columbus, Ohio 43213  
(614) 868-9464

**CALL TOLL FREE  
800-848-7548**





### New FCC Ham Radio Proposal

Dear Editor:

Since the April issue of MICRO featured Communication, I thought you should be aware that the FCC is now proposing a new class of amateur radio license requiring NO morse code test. The class will be intended for people whose primary interest is in computers or experimentation rather than the traditional amateur goals of work-

ing all states or all countries. The license will probably be restricted in power and in frequency, and will be mainly for short-range high-quality communication such as data links.

The existing ham radio community is vigorously opposing this new class and has organized letter-writing programs to the FCC stating their opposition. I would like to suggest that the readers of MICRO would be among those to benefit from such a new class

of license. The FCC should hear from more computer people since the ham radio voice will be well represented opposing the idea.

I believe connecting a radio link to a computer will open a new mode of communication. Comments should be addressed to the FCC referring to docket = 83-28 FCC, Washington DC 20554. Send your comments to MICRO too.

An anonymous radio ham/computerist

## Updates and Microbes

### Interface Fixes

Four misprints appeared in my article "Building a Parallel Printer Interface" (53:23). In the diagram on page 23, lines A0 and A8 are interchanged. In the same diagram, the STROBE line should *not* be connected to +5. On page 24 there are two errors in the second column. About halfway down, the text should read "...simply use the Q output from U8 rather than Q." Finally, on the next-to-last line of column 2, the STA command should be changed to LDA.

Rolf B. Johannesen  
Rockville, MD

### Line Correction

There is an error in my article, "A Binary Search Routine" (57:37). Line 10170 in both listing 1 and listing 2 should be:

10170 For J=J TO 0 STEP - 1  
instead of  
10170 For J=J TO 1 STEP - 1

Alfred J. Bruey  
Jackson, MI

Send your comments, insights, ideas, or bugs to Letterbox, MICRO, P.O. Box 6502, Amherst, NH 03031.

### Parts List

The following parts list was left out of John Steiner's article, "A Home-Built Communications Interface" (59:44):

PARTS LIST MODULATOR		
REF. NUMBER	VALUE	NAME
C1	1 UF 16V	CAPACITOR
C2	.03 UF	"
C3	.03 UF	"
D1, D2, D3	1N914 OR EQUIV	DIODE
IC1	LM566	PLL IC
IC2	LM 339	"
Q1, Q2	2N2222	TRANSISTOR
R1	10 K	RESISTOR
R2	1 K	"
R3	1 K	"
R4	10 K	"
R5	10 K	"
R6	1 K	"
R7	10 K	"
R8	5 K	"
R9	2.2 K	"
R10	250	TRIMPOT
R11	1 K	RESISTOR
R12	24 K	"
R13	10 K	"
R14	12 K	"
R15	20 K	"
R16	10 K	"
R17	1 K	"
ALL RESISTORS 1/4 WATT		
SW1, SW2	SPDT MINI TOGGLE SWITCH	

PARTS LIST REGULATOR		
REF. NUMBER	VALUE	NAME
C1	1 UF	CAPACITOR
C2	1 UF 16V	"
IC1	LM317	ADJ REG IC
R1	220 OHM 1/4 WATT	RESISTOR
R2	5 K	TRIMPOT

MICRO

**SAVE  
20%!!!!**

**Subscribe  
to**

**MICRO™**

**Use This Postage  
Paid Card to Order  
the Next 12 Issues  
of MICRO and SAVE  
\$6.00 Off  
Newsstand Price!**

**MICRO™**

**SAVE 20%**



Yes! Enter my subscription to MICRO, and send me the next 12 issues for just \$24.00. I save \$6.00 off the newsstand price!

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

I'm paying by  Check  MO  VISA  MasterCard

Card # \_\_\_\_\_ Exp. Date \_\_\_\_\_

Signature \_\_\_\_\_

I OWN A:

- Commodore 64  VIC-20  
 Apple  PET  
 Atari 40C  Atari 800  
 Other: \_\_\_\_\_

For Faster Service Call:

**1-800-345-8112**

(In PA: 1-800-662-2444

VISA or MasterCard Only

**A Feast Of  
Computing  
Ideas...**

**Order These  
Books From**

**MICRO™**

**MICRO™ Books**

**NEW for VIC-20 Users!  
Mastering Your VIC-20  
With 8 BASIC Projects**

A book that makes learning to program your VIC-20 fun! Contains 8 projects and programs. Games, utilities — even a VIC-20 version of "VisiCalc." All 8 programs on cassette to help you learn faster.

Mastering the VIC-20 @ \$23.95

**NEW for OSI Users!  
MICRO on the OSI**

Includes Machine-Language enhancements and BASIC Aids, hardware modifications for enhanced/reversed video, programs for control code and upper/lower case entry. A valuable programming tool.

Micro on the OSI @ \$19.95

**Best Sellers for  
APPLE Users!  
MICRO on the APPLE**

Programming aids, utilities, games, enhancements. Together Volumes 1, 2, and 3 contain over 100 programs on diskette. Fully documented and explained.

3-Volume Gift-Boxed @ \$59.95  
 Vol.1  Vol.2  Vol.3 \$24.95 ea.

Please rush the MICRO Books I've checked above to:

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

(Allow 6-8 weeks for delivery)

I'm paying by:  Check  MO  
 VISA  MC

Total Enclosed: \$ \_\_\_\_\_  
 (Add \$2.00 s/h per book. MA res. add 5% tax)

Visa/MC # \_\_\_\_\_

Exp. Date: \_\_\_\_\_

**MICRO™**

**Reader  
Service...**

**For More  
Information  
On The  
Advertisers  
in This Issue!**

**MICRO™ Reader Service Card**

The numbers below correspond to the numbers imprinted on the advertisements in this issue of MICRO. This card valid for 90 days only.

Mail information to:

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17	18	19	20	21	22	23	24	25	26
27	28	29	30	31	32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47	48	49	50	51	52
53	54	55	56	57	58	59	60	61	62	63	64	65
66	67	68	69	70	71	72	73	74	75	76	77	78
79	80	81	82	83	84	85	86	87	88	89	90	91
92	93	94	95	96	97	98	99	100	101	102	103	104
											105	106



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

**BUSINESS REPLY CARD**  
FIRST CLASS PERMIT NO. 20, AMHERST, NH

POSTAGE WILL BE PAID BY ADDRESSEE



10 Northern Blvd.  
P.O. Box 6502  
Amherst, NH 03031



**SAVE  
20%!!!!**  
**Subscribe  
to  
MICRO™**

Use This Postage  
Paid Card to Order  
the Next 12 Issues  
of MICRO and SAVE  
**\$6.00 Off**  
Newsstand Price!



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

**BUSINESS REPLY CARD**  
FIRST CLASS PERMIT NO. 20, AMHERST, NH

POSTAGE WILL BE PAID BY ADDRESSEE



10 Northern Blvd.  
P.O. Box 6502  
Amherst, NH 03031



**A Feast Of  
Computing  
Ideas...**

**Order These  
Books From**




NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

**BUSINESS REPLY CARD**  
FIRST CLASS PERMIT NO. 20, AMHERST, NH

POSTAGE WILL BE PAID BY ADDRESSEE



10 Northern Blvd.  
P.O. Box 6502  
Amherst, NH 03031

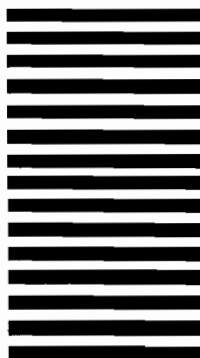

**MICRO™**  
**Reader  
Service...**

**For More  
Information  
On The  
Advertisers  
In This Issue!**

SAGE TECHNICAL BRIEFING

SYSTEM DESIGN, SAGE IV

# Meet The New Giant Of The Microcomputer Industry. All 4.8 x 12.5 x 16.75" Of It.

The challenge was to create a computer having room for a megabyte of RAM, a built-in Winchester with floppy backup, and the ability to perform 2,000,000 instructions per second.

A small miracle, in other words. And small is exactly what it turned out to be. In fact, the 16-bit Sage™ IV, including all of the above attributes, takes up less than 1/2 cubic foot.

What makes such a breakthrough possible? System design.

It took the latest 64K dynamic RAMs and the Motorola 68000 processor technology, plus Winchester technology. And it took a highly integrated, closely packed, low power, high speed design, incorporating a proprietary bus.

Now the Sage™ IV is ready for you. Actually, you can choose from three different Sage™ IV models to meet your exact needs—configurations with a 5 megabyte

Winchester plus 640K floppy right on up to a combination of four fixed or removable Winchesters plus one or two floppies (200 megabytes of disk capacity in all).

Because of the Sage™ IV's no-compromise system design you can load a 16K program in 1/10 second from Winchester disk.

What's more, there are over 120 sources for existing popular programs for the Sage™ IV. The incredible p-System operating system, standard on every Sage™ IV, converts software that was originally written for 8-bit computers in Pascal, BASIC, and Fortran. Optionally, C/P/M-68K Modula, and Hyper-Forth are also available.

Better yet, our small miracles come with prices to match.

So give us a call or write today for more Sage™ IV information and the name of your nearest dealer.

Western United States

Sage Computer Technology  
35 North Edison Way, #4, Reno,  
NV 89502 (702) 322-6868

Eastern United States

Sage Computer Technology  
15 New England Executive Park  
Suite 120, Burlington, MA 01803  
(617) 229-6868

In UK

TBI LTD, 29 Alma Vale Road,  
Clifton, Bristol BS8 2FL  
Tel: 0272 742796  
Tx: 444 653 Advice G

In Germany

MM Computer GmbH  
Hilwanger Str. 59, 8210 Prien  
Tel: 080513074  
Tx: 525 400 mmco-d

Sage, trademark of Sage Computer Technology  
C/P/M, trademark of Digital Research  
Modula, trademark of Volition Systems  
Hyper-Forth, trademark of Forthright Engineering  
p-System, trademark of ILC Regents



**SAGE**™  
COMPUTER TECHNOLOGY

PROCESSOR

**SAGE IV**

## PET Vet

Loren Wright

When you start to think about serious applications for your Commodore 64, a word processor should be one of the first to come to mind. Word processors work well with the C64. The extra memory allows more text to be held in memory at one time, and the keyboard allows rapid and accurate entry of text. The 40-column display is not as much of a problem as you would think. Because of interference of certain colors on some TVs or monitors, being able to change character and screen colors is important.

I have reviewed two very good word processors — *Script 64* and *Word Pro 3 Plus/64*. There are others, they will be reviewed as time and space permit.

### Script 64

*Script 64* is a new word-processing program for the Commodore 64 by David Foster of Richvale Telecommunications (10610 Bayview Avenue, Richmond Hill, Ontario L4C 3N8, Canada). Richvale's products, including *Script 64* and the *C64-Link* cartridge reviewed in April, are now marketed in the U.S. by Computer Marketing Services (300 W. Mainline Pike, Cherry Hill, NJ 08002). The disk version sells for \$139.95.

### Design

Unlike other word processors that use either an actual-page or continuous-scroll organization, *Script 64* organizes text in 22-line screens. At first this seemed inconvenient, but the more I used the program, the more I could see advantages. Advancing to the next numbered screen is accomplished easily by pressing the 'F1' key. If you advance to the next screen well before you reach the end, then you avoid a lot of problems. This leaves room to insert text later in the editing process. If you keep only a paragraph or two on a screen, then cut-and-paste operations are easy. On printout, incomplete

screens are handled routinely by ignoring the blank lines at the end of a screen. If you do have to fill a screen and continue immediately on the next one, then that can be accomplished too.

The disadvantage of this screen organization is that you always have to keep one eye on the screen to make sure you aren't about to fill it. There is an audible warning when you have filled the screen, but it comes too late to leave room conveniently. In these cases, it is possible to fill the screen to the next one.

The disk holds 99 screens, of which 40 can be held in the C64's memory at once. When a load or save operation is performed for a particular screen, then the entire file, including that screen, is copied. This is a slow process with the serial disk drive, so there is a provision to save only half at a time.

Each disk has an index when you keep track of other locations of documents. You can load the file containing a document simply by hitting RETURN with the cursor at the appropriate index entry. Unfortunately, maintaining the index is entirely up to you. This is the only major deficiency in *Script 64*.

### Entry of Text

The normal mode of text entry is called "wordstream." That is, everything typed in appears continuously on the screen. At the end of a line, the next character appears at the beginning of the next line, even if it is in the middle of a word. To indicate the end of a paragraph you just hit the RETURN key and begin the next paragraph on the next line.

Superscripts, subscripts, and underlined, bold, and italic printing are indicated by special characters within the text. All other formatting controls are handled by the control maps and on special "structured" screens.

The large control map applies to the whole document and defines such things as the left margin, line length, line spacing, top and bottom borders, page length, page numbering, and placement of a title. *Script 64* has a

default control map that is adequate for many applications, but you may change the parameters. You can also save a control map with these altered parameters.

In addition, each screen has its own small control map that overrides the large control map settings for left margin, line length, line spacing, justification, and a few other parameters. A small control map affects only its associated screen.

Structured screens are used for a number of special situations including tables, centered text, and columns of text. Each line in a structured screen that you want in the final output must end with a term character. There is, however, an automatic return feature that keeps whole words together and terminates the lines properly. Tabs may be set over the full 40 columns. Also available are a bell character for characters before the end of each line, automatic tabulation, and automatic structured formatting.

### Editing

Editing with *Script 64* is convenient. The cursor-control keys allow type-over editing anywhere on the screen. Deletions may be done on individual characters, words, sentences or lines, or on a block of text. You may also specify how you want character deletions to work. The default, or typing, delete removes characters to the left of the cursor, closing the space with characters from the right. The editing delete removes the character under the cursor, closing the space with characters from the right. Insertions are by individual character or line, or you can enter insert mode, where all characters typed are continuously inserted at the cursor position. Entering and exiting insert mode is more cumbersome than with WordPro.

It is easy to transfer or copy blocks of text from one position to another, even between widely separated screens. The block is defined using the same procedure as for block-deletes.

Whole screens may be deleted or moved, and blank ones may be inserted.



## Search and Replace

The search and search-and-replace functions operate either locally (from current screen to the end of the 40-screen file in memory) or globally (from current screen to the end of the disk). You may also specify that the program pause to give you selective control over each replacement, or you may have it make replacements on all occurrences automatically.

Perhaps the handiest feature of *Script 64* is its ability to specify several search or search-and-replace operations on the same pass through the text. There is no wild-card character match or ignore-case option.

## Printouts

The printout is controlled by the control map. To print a file you must specify the sequence of screens to be printed when you first enter print mode. When you enter '000' the output begins. You may output to the screen first to be sure everything appears as you intended. The '4' and '6' keys move the screen left and right as a window on the output, which usually is wider than the 40-column screen. You can begin printing from the next page during this output to video by pressing 'P'. Other print options available include automatic hyphenation, multiple copies, pauses, and printing of the screen numbers. A frequently used or complicated print sequence may be saved on a blank screen. Then, at printout time only this one screen needs to be listed in the print sequence.

## Form Letters and Variable Data

*Script 64* has a variable chart that allows you to define up to 20 different words or phrases of 30 or fewer characters. Whenever you want to use one of these, you enter an asterisk and the number of the variable. The word or phrase corresponding to the variable number will be inserted at that position at printout time.

These asterisk codes are also used to fill a document from fields of a sequential or CBM Scratchpad file. (CBM Scratchpad is a separate database pro-

gram sold by Electronic Research Systems.) Because the fields are sequentially numbered in the document, you can erase or skip fields or use them all at once.

There is no way to use the program itself to construct a list of words and phrases, but you can use the program, just as with Word to draw out a list fairly easy to write a BASIC program to construct sequential files for this purpose. Also there is an option for manual fill points within a document.

## Manual

The manual is well written and easy to follow, particularly when you are learning the program. However, the manual is not very complete. There is no index and no program chart, although there are many diagrams available on the disk. Also, there is a summary table of commands in each chapter. It comes in a separate binder so that it will be flat on a page.

## Equipment Compatibility

The initial menu lists eight different printer types, including the unmodified *Script 64* with a DVW printer and with a Star Micronics Centronics interface through a Micro World Electronics MW-302. Both hardware and software printing) and underlining worked fine, but subscripts, superscripts, and fractions worked on neither. Using the modifiable key feature, these options can be supported if they are available on your printer.

*Script 64* also will support either IEEE or serial disk drives and parallel, serial, or IEEE printers.

## Special Features

*Script 64* provides for entry of special French characters including grave, circumflex, aigu, and cedille marks. These appear correctly on the screen and on the printout, if the printer can handle it.

The dictionary mode is an interesting and potentially useful feature. It allows you to build up a dictionary disk of 20,000 words. You then com-

(Continued on next page)

# OHIO SCIENTIFIC

## NEW PROGRAMS!

**SCOUT**—Full color, machine language, fast action and graphics! After a year of development, comes the all machine language **SCOUT**. Patrol the planet surface protecting and saving the human population from abductors. Turn your OSI into a real arcade!  
\$24.95 C4PMF, C8PDF.

Send for our FREE catalog. We have what you want for less: S-FORTH \$39, FULL SCREEN EDITOR \$19, ADVENTURE \$19, SKYHAWK \$8, TOUCH TYPING \$19, INTELLIGENT TERMINAL \$24, THE WIZARD'S CITY \$12, UTILITIES, and much more for the C1P to the C8PDF.

(312) 259-3150

**AURORA SOFTWARE**

37 S. Mitchell  
Arlington Heights,  
Illinois 60005

Circle No. 8

# COMPU SENSE

"CARD/?"  
(CARD/PRINT)

UNIVERSAL CENTRONICS  
PARALLEL PRINTER  
INTERFACE FOR THE VIC-20®

Now you can use your VIC-20® with an EPSON MX-80 printer, or an OKI-DATA printer, or a TANDY printer, or just about anybody's printer. And you don't have to give up the use of your user port (MODEM), or change to special printer commands, or load any special software driver programs to do it.

- Outputs standard ASCII codes to the printer.
- Plugs in the VIC-20® printer serial i/o port.
- Understands all standard VIC-20® print commands.
- No modification to your VIC-20®.
- No special programs required.
- Includes all necessary cables to hook up a standard printer using centronics parallel input.
- MADE IN THE U.S.A.

The "CARD/?" is a product of CARDCO, Inc.

\$79.95

TO ORDER:  
P. O. BOX 18765  
WICHITA, KS 67218  
(316) 263-1095

Personal checks accepted  
(Allow 3 weeks) or  
C. O. D. (Add \$2.00)  
Handling charges \$2.00  
VIC-20® is a registered trademark of Commodore



Circle No. 9



## SYSTEMS INTEGRATOR

INTRODUCING:

### ZYTREX ZT14411 CMOS BAUD RATE GENERATOR

REPLACES MOTOROLA MC14411

- PIN/FUNCTION COMPATIBLE
- IMPROVED FREQ OUTPUT DRIVE (4 LSTTL LOADS)
- FULLY STATIC OPERATION
- TTL-COMPATIBLE INPUTS
- WIDE OPERATING VOLTAGE

FREE EVALUATION SAMPLES  
FOR VOLUME USERS

\$6.20 EACH AT 1000 PCS.

ZYTREX CORPORATION  
224 NORTH WOLFE ROAD  
SUNNYVALE, CA 94086  
**(408) 733-3973**

Circle No. 10

## COMPU SENSE

### CARDBOARD 6 \$87.95

An expansion interface for the VIC-20. Allows expansion to 40 K or accepts up to six games. May be daisy chained for more versatility.

### CARDBOARD 3 \$39.95

Economy expansion interface for the VIC-20

### CARD "?" CARD/PRINT \$79.95

Universal Centronics Parallel Printer Interface for the VIC-20 or CBM-64. Use an Epson MX-80 or OKIDATA or TANDY or just about any other.

### CARDETTE \$39.95

Use any standard cassette player/recorder with your VIC-20 or CBM-64

### LIGHT PEN \$29.95

A light pen with six good programs to use with your VIC-20 or CBM-64

Prices subject to change.

TO ORDER: P. O. BOX 18765  
WICHITA, KS 67218  
(316) 263-1095

Personal Checks Accepted (Allow 3 Weeks)  
or C.O.D. (Add \$2) Handling Charges \$2.00

12 Circle No. 11

## PET VET (continued)

part your text to the dictionary and it indicates words not found. You may add a word to the dictionary, replace it, skip it, or quit. The dictionary does not actually correct your spelling.

Additional features include help screens, redefinition of keys, screen and character color change, and a numeric mode that lines up decimal points automatically.

The cassette version of this program was not tested and, although it is mentioned in the manual, it is not being sold by Computer Marketing. The index, help screens, dictionary, and global search features are not supported in the cassette version.

Text prepared using *Script '64* is compatible, to varying degrees, with other word processors sold by Richvale.

## WordPro 3 Plus/64

*WordPro 3 Plus/64* is a word processor program for the Commodore 64 available on disk from Professional Software (51 Fremont Street, Needham, MA 02194) and dealers for \$89.95.

### Design

Text in *WordPro 3 Plus* is a continuous scroll of 40 character lines. Up to 352 lines may be in memory at the same time. These are divided between *main* and *extra* text at start-up. Normally you would use 329 lines in the main text area and 23 lines in the extra text area, but the division is flexible. Extra text is used to hold frequently used phrases or stock paragraphs for convenient recall. Also it can be used to display the disk directory or to hold lists of names and addresses for insertion into a form letter.

Formatting, including margins, line spacing, centering, justification, and a great number of other parameters, is specified in special format lines. These lines begin with a check mark and do not print. The parameters may be changed at any point in the text simply by inserting a new format line.

Files are saved on disk by name, and

they may be recalled conveniently from a directory listing or with an abbreviation.

### Entry of Text

Text is entered in a continuous 'wordstream' style. There is no division into paragraphs or screens; this occurs at printout time. When the cursor reaches the end of a screen line, it simply moves to the beginning of the next line, even if it means splitting a word in the middle. To force a new line, such as at the end of a paragraph, you just hit the RETURN key.

Another file on disk may be linked to the end of the current one by including the name of the next file in a special format line.

Superscripts, subscripts, and hold or underlined text are indicated with special control characters. Special characters, such as those found on certain letter-quality printers' print wheels, also can be defined and included.

### Editing

The cursor-control keys can be used to position the cursor anywhere in the current file. Changes may be made by typing over, inserting, and deleting, etc. Individual characters, as well as words, sentences, and screen lines may be deleted. Individual characters may be inserted, and there is a convenient insert mode where all typed characters are inserted at the current cursor position.

There is a *range* function used to memorize any sequence of screen lines. Once defined, these lines may be erased, transferred, or copied. This is not as convenient as a true *block* type function where the beginning and ending points may be specified anywhere within a line.

Also you can insert a whole file from the disk at any point, assuming it will fit.

### Search and Replace

There are separate search and search-and-replace functions, which can operate either locally or globally.

Global operations act both on the current file and upon subsequent linked files stored on the disk. There are two separate command codes, plus two more to restart the searches. Replacement is done automatically on all occurrences, without any selective option. The '?' character is used as a wildcard to match any character, but there is no ignore-case option.

### Printouts

Printouts are done according to the codes contained in the format lines you enter in the text. Before printing, you may specify whether or not to pause between pages, where to get data to fill variable blocks, and the number of copies. There is also a global option where you specify the name of the first file in a sequence. Linked files are loaded automatically as they are required.

### Form Letters and Variable Data

Fill points may be indicated within your text. These will be filled before printout either manually, with data you type in, or automatically, from extra memory or a sequential file. There is no differentiation among fill points in a document, so you must be sure your extra memory or sequential file contains the right items in the proper order.

Frequently used phrases and paragraphs may be defined in extra memory. A few keystrokes, including the appropriate abbreviation, will copy that phrase or paragraph at the current cursor position.

### Equipment Compatibility

*WordPro* is especially designed to operate with the NEC Spinwriter series of printers, so it supports all the features of that line, including special characters on its interchangeable print wheels. Other printers, including Diablo, Qume, TEC, and various Commodore printers are supported too.

This evaluation was conducted using a CBM 4022 printer and a Star Micronics Gemini-10 printer through a

Micro World Electronics (3333 S. Wadsworth Blvd. C105, Lakewood, CO 80227) interface. Overprinting was not supported on either printer using the standard codes, and underlining was done with individual backspaces for each letter. Subscripts and superscripts could not be printed using the standard codes, but *WordPro's* definable characters can be used to produce these and other special effects on the Gemini-10.

### Manual

The manual is well organized with an index, table of contents, and reference charts. There is also a series of lessons, and the disk includes a linked letter with examples of most of the format commands.

The soft-bound manual is difficult to keep open on a table, but it is punched so you can put it in your own binder.

### Special Features

The screen, character, and border colors may be changed. This is required to counteract interference and peculiarities of some monitors and TVs.

There are tabs, numeric mode, column add/subtract, and hyphenation.

The disk is copy-protected but includes a back up copy.

*WordPro*, in its many forms, is the most popular word processor for Commodore equipment. Files are compatible with certain size restrictions between the different versions.

### Next Month

In my July column I'll take a look at FORTH as a development tool for commercial software on the Commodore 64. Also, I'll review some new books for the VIC.

You may contact the author at P.O. Box 6502, Amherst, NH 03031.



## COMPU SENSE

- QUICK BROWN FOX **\$60.95**  
The #1 word processor!
- GENERAL LEDGER **\$19.95**  
(VIC-20)
- CHECK MINDER  
VIC-20 **\$19.95** C-64 **\$24.95**
- HOME INVENTORY **\$19.95**  
(VIC-20)
- CENTIPOD **\$27.95**  
Like Centiped, only better!
- FROGEE **\$27.95**  
The exciting arcade game of Frogger.
- MOTOR MOUSE **\$29.95**  
What a cheese'ee game!
- CRIBBAGE  
VIC-20 **\$14.95** C-64 **\$17.95**  
This is the game of Cribbage.
- STAR TREK  
VIC-20 **\$12.95** C-64 **\$17.95**  
Excellent adventure game!
- MASTER MIND  
VIC-20 **\$12.95** C-64 **\$19.95**  
Makes you think.
- ROACH MOTEL **\$9.95**  
Kill the bugs!
- YAHTZEE 1.1 **\$12.95**
- YAHTZEE 2.1 **\$14.95**

TO ORDER:  
P. O. BOX 18765  
WICHITA, KS 67218  
(316) 263-1095

Personal checks accepted  
(Allow 3 weeks) or  
C.O.D. (Add \$2.00)  
Handling charges \$2.00

VIC-20® is a registered trademark of Commodore



Circle No. 12

## FOXSOFT™

Presents....

## Spryte Byter™

For the Commodore 64™

The user affectionate sprite development program. Menu-driven, Mono/Multicolor sprites, joystick/keyboard, Tape/Disk. 20K w/FAST machine language routines. Over 60 commands: ROTATE (any angle 0-360), INVERT/OBVERT, SHIFTS, SYMMETRY, AND/OR, REVERSE, REVIEW, MOVIE (animation). Create and Edit up to 128 sprites per file. For programming efficiency and FUN!

### PLUS

#### The Game Maker

Automatically prepares a base for game development-up to 32 sprites WITHOUT DATA STATEMENTS! Adds SPEED to your games. Saves memory too.

To order: Send check (U.S. Funds) \$29.95 for Cassette, \$34.95 for Disk. Dealer inquiries invited.

## FOXSOFT™


P.O. Box 507  
Deer Park, Texas 77536  
(713) 473-6723



A Division of Foxfire Systems, Inc.

# ACORN 68000

ATTACHED  
PROCESSOR  
FOR THE  
APPLE II™



\$1495

#### HARDWARE

- 68000 Microcomputer with 16 MHz clock
- 131,072 Bytes of RAM Memory
- 32,768 Bytes of ROM Memory
- Two RS 232c serial ports up to 9,600 bps
- One million bps interface with APPLE™
- Seven levels of vectored interrupts
- Real time clock and timer
- Separate case and power supply

#### SOFTWARE

- Uses only one peripheral slot in the APPLE™
- Invisible operation with APPLESOFT or PASCAL
- Compatible with Compilers and 6502 Assemblies
- 68000 Assembly Language Development System

Write or call for a free brochure or send \$10 for 100 page users manual (refunded with order for ACORN)

#### ACORN SYSTEMS INC.

4455 TORRANCE BLVD., #108 • TORRANCE, CA 90503  
Telephone (213) 371-6307

Circle No. 14

\*Apple, Apple II and Applesoft are the trademarks of Apple Computer Co

# MICRO™

## From Here To Atari

Many companies supply products that can be attached to the Atari 400 and almost as many supply products for the Atari 800. Starting with this column, I will include a description of one of these products each month.



### InHome B Key Keyboard


I recently installed an InHome keyboard in a customer's Atari 400 computer. This keyboard replaces the membrane keyboard inside the case. The membrane keyboard is smaller than a standard keyboard but the InHome keys are placed at the standard distances from each other. In order to do this and still fit the new keyboard into the same space, a few of the keys at the ends of the rows were relocated to places on each side of the spacebar.

Specifically, there are five relocated keys: CNTL, TAB, CAPS/LOWR, BACK S, and ESC. A period of adjustment is required for touch typists who are very familiar with the layout of the Atari 400 and Atari 800 computer keyboards. The most annoying part of the adjustment is the relocation of the BACK S key. The BREAK key on the InHome keyboard occupies the spot formerly occupied by BACK S. I feel that this point is the keyboard's major weakness; the BREAK and BACK S keys should be reversed.

Once you get past the adjustment period, the keyboard has obvious advantages. All of the keys, including SYSTEM RESET and the three function keys, are full stroke keys on this board. In addition, increasing the distance between the key centers to the standard distance of typewriters makes word processing and other text-oriented tasks even easier. All except one of the keys are labelled almost identically to the keys on the Atari 400 computer keyboard. The only one completely changed is the Atari key, which is now the InHome key.

Adding an InHome keyboard and a 48K memory board to an Atari 400 makes it almost equivalent to an Atari 800 at a savings of up to \$200. You still don't have a right cartridge slot, but that is starting to look like a vestigial organ of Atari 800 computers. Also missing is the circuit for attaching a monitor. For more information write to InHome Software Inc., 2485 Dunwin Dr., Mississauga, Ontario, Canada L5L 1T1.

## Commodore 64™ & Apple II™ Assembly Language Debugger

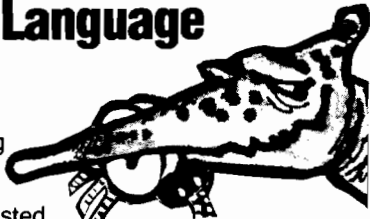

If you are developing software for the Commodore 64 or Apple II or are interested in assembly language programming, you needed this finely-crafted aid "yesterday." All the features you'd expect in an advanced debugger are included - step, breakpoints, windowing, super-complex conditional breaks, symbolic debugging, patch, show prior 128 steps, and compiled BASIC-like language. Supplied complete with a detailed instruction manual. A new data sheet is available on request.

- PTD-6510 Debugger for Commodore 64 ..... \$65.10
- PTD-6502 Debugger for Apple II and IIe ..... \$49.95
- Manual (only) for above, each ..... \$10.00
- DisKit 64 Fast single disk copy  
(+utilities) for Commodore 64 ..... \$75.00

\*PTD-6510 (Commodore) requires 1541 disk drive.  
PTD-6502 (Apple) requires DOS 3.3, 48K.




# PTERODACTYL SOFTWARE™

200 Bolinas Road #27, P.O. Box 538  
Fairfax, CA 94930 (415) 485-0714

Circle No. 15

by Paul Swanson



## On Map Modes

The new Atari 1200XL computer has two new map modes. One of them is mode 15 which is a four-color mode with 160 dots horizontally and 192 vertically. Trying a GRAPHICS 15 statement on an Atari 400 computer or an Atari 800 computer will produce an error 145 because the operating system does not support that mode. It is available on both of those computers, but you must supply your own display list or alter one supplied by the operating system.

Listing 1 alters the display list that results from a GRAPHICS 8 statement. The FOR/NEXT loop in lines 40 through 70 performs this alteration. Line 30 gets the location of the start of the display list first, then the FOR/NEXT loop investigates the list and makes the changes. The specific differences are two types of commands. A decimal 79 (\$4F) loads the memory scan counter for the mode 8 screen. This gets changed to a decimal 78 (\$4E) for a mode 15 screen. Decimal 15 (\$0F) is a mode line command that displays one mode 8 line on the screen. The decimal 14 (\$0E) causes a display of a mode 15 line instead.

The numbering of the commands and the modes can be a little confusing. There are two distinct numbering systems used. The modes declared in GRAPHICS statements are OS (operating system) modes and obey a numbering system quite different from the internal numbering system, referred to as the IR (internal register) mode. OS mode 8 is IR mode \$F and OS mode 15 (Atari 1200XL computers only) is IR mode \$E.



ATARI 1200XL HOME COMPUTER™

The FOR/NEXT loop occupying lines 80 through 150 draws three diagonal bars of color on the screen. The BASIC ? (PRINT) statement to a map mode screen is not documented at all as far as I have been able to determine. It interprets one screen dot per character in the string. If the screen is a two-color screen, as in this example, only the last bit is used in each character. Therefore, if the ATASCII value of the character is an odd number, the

SCIENTIFIC SOFTWARE ASSOCIATES, LTD.

# Q-card

Questionnaire Analysis Software

- Microcomputer based  
Avoid the expense of contract services -- do everything in-house on your own Apple II+ microcomputer.
- Easy data entry  
Avoid time consuming keypunching. Uses respondent-marked cards entered with an Optical Mark Reader (keyboard entry also possible).
- Comprehensive data analysis  
Sort on any variable(s), tally all responses, conduct cross tabs, correlations, linear regression, frequency distributions, and more.
- Complete editing capabilities  
Weight items, derive composites, add or delete items, and more.
- Easy-to-use  
Programs are user friendly, menu driven, and interactive. No special computer expertise is required.

Call or send for more information today.

SCIENTIFIC SOFTWARE ASSOCIATES, LTD.

BOX 208 • WAUSAU, WI. 54404  
TELEPHONE: (715) 845-2086

Circle No. 16

Apple II+ is a registered trademark of Apple Computer, Inc.

## PET / CBM™ SOFTWARE SELECT!

**8032**  
DISPLAY

OR

**4032**  
DISPLAY

FROM THE KEYBOARD OR PROGRAM  
NOW RUN WORD PRO 3 OR WORD PRO 4

### FROM THE SAME MACHINE

Available for either 4000 or 8000 Series

ALSO:

For **2001 / 3000** Series Computers

Operate these Models in a Full **8032** Like  
Display For Word Pro 4\*

and all other 80 Column Software

All installation instructions included.

### EXECOM CORP.

1901 Polaris Ave.  
Racine, WI 53404  
Ph. 414-632-1004

Circle No. 17

PET/CBM a trademark of Commodore Business Machines  
\*trademark of Professional Software, Inc.

## From Here To Atari *(continued)*

foreground color is used for the dot and the even numbers produce background colored dots. The `POKE` method is used in this example because `DRAWTO` cannot be restricted to only even numbered or only odd numbered columns.

The requirement for the even or odd numbered columns is due to the operating system "thinking" that it is maintaining a mode 8 screen. Altering the display list causes the screen image to be interpreted in bit pairs. Beginning on an even row, bit pairs of 01 [binary] result in a dot of the color in register 0, 10 to register 1, and 11 to register 2. Note that this follows the same scheme used in the BASIC `COLOR` statement numbering.

Listing 2 produces the same display on an Atari 1200XL computer as does Listing 1. Since the operating system "knows" that it is a four-color screen, the numbers 1, 2, and 3 are used instead of the pairs 01, 10, and 11. On four-color screens, each character in the string contributes the last two bits of its ATASCII value.

Listing 3 demonstrates the increased resolution between mode 7 and mode 15. This listing (and Listing 1) will work on the Atari 400 computer and the Atari 800 computer as well as on the Atari 1200XL computer. Lines 10 through 70 draw the three colored bars on a mode 7 screen. Lines 80 through 100 wait for the `RETURN` key. Lines 110 through 140 convert the display list to mode 15. The screen will shrink to one half height because mode 7 has only half the number of lines as a full mode 15 screen.

### POKEY Times

I recently received a letter from Ian Chadwick, the Associate Editor of *InfoAge* and author of *Mapping the Atari*. He suggested that I include some information on the POKEY timers in my column. His observation that the Atari documentation does not adequately cover them has some merit.

There are three of these timers available for use. All of the times use the `AUDF` values for initialization, which are the same values used for sound channels 0 through 2. `STIMR` is another location actually used to start the counters. Each timer sets an interrupt when it counts down to zero.

A couple of peculiarities about the timers reveal some interesting insights into how they operate. They are enabled by setting the corresponding bit at location 16 [decimal] to one. Set timer 1 by `POKE 16,193`. Note that the keyboard, including the `BREAK` key, no longer functions. Press `SYSTEM RESET` to restore the keyboard. The reset puts the value 192 [decimal] back in location 16, disabling the interrupt.

`POKEing 193` into location 16 enabled timer 1 when the `AUDF` value was zero. This causes a constant interrupt, leaving no processor time available and masking all other maskable interrupts. `SYSTEM RESET` is a non-maskable interrupt that can override the timer interrupt.

Now `POKE 53760,10`, which sets `AUDF1` to 10, giving timer 1 some time when it is counting before it generates

the interrupt. `POKE 16,193` to enable the timer and hold down the space bar. Notice that the auto-repeat is irregular and slower and that the keyboard click changed its tune. If you `POKE` a number smaller than 10 into `AUDF1`, the auto-repeat will be even slower, the limit being a zero in `AUDF1`, which stops everything.

Although the examples are BASIC, the BASIC language cannot really function with these timers because interrupt routines cannot be written in BASIC. In machine language, an interrupt routine can handle the timer 1 interrupt very effectively. One of the best uses for the timer interrupts is to time two external events like pulses on the controller jack pins. Set `AUDF1` to the interval you want to use to time the event first. Alter `$0210` and `$0211`, which is the interrupt vector. Store your interrupt routine starting address here. Set up a flag and a counter in memory and set the flag to zero. Last, enable the interrupt.

The interrupt routine is in three sections, controlled by the value in the flag. When it is zero, just poll the first signal. If it is present, set the flag to one, store anything in location `$D209` (this is `STIMR` — writing to this location initializes all timers to the `AUDF` value). Then zero your counter, `PLA` and `RTI`. Make sure that you pull `A` before any `RTI` and always restore `X` and `Y` and any other registers you affect or you will probably crash the system. If the flag is one, increment the counter and test the second signal. If it is present, set the flag to 2 before you restore the registers and `RTI`. If the flag is 2, just restore registers and `RTI`.

That sequence will time the duration between the two events polled in the units determined by the value in `AUDF1`. To start the sequence, just store a zero in the flag. Check for the flag equal to 2 for a completed timing sequence. When the flag equals 2, the counter value is valid. Note that the units are  $N/63921$  seconds, where  $N$  is the `AUDF1` value, so using 64 for `AUDF1` produces units reasonably close to milliseconds. Altering `AUDCTL` can change the frequency used if this is an inconvenient unit — the default 64 KHz can be altered to about 15 KHz or about 1.79 MHz. The exact frequencies are 15.6999 KHz and 1.78979 MHz for these alternates.

### Next Month

The 850 interface seems to be an interesting yet misunderstood device. July's column will clear up questions you may have. Next month's hardware product description will be of the new 80-column RGB interface recently announced by Austin Franklin Associates.

**MICRO™**

Send your letters to: Paul Swanson, 97 Jackson St., Cambridge MA 02140.

# SJB DISTRIBUTORS. THE MOST COMPETITIVE PRICES ON COMMODORE.



## NEW COMMODORE PRODUCTS

CBM 64	Call
CBM B500	\$ 695
CBM B700	2990
CBM 1520 Plotter	259
CBM 1701 Color Monitor	279
B Series Software	Call

## SOFTWARE FOR CBM 64

Word Processing (WordPro 3*)	\$ 69
Word-Pac (tape)	60
The Assistant Series	
Writer's Assistant (easy and flexible)	99
File Assistant (database with merge)	99
Spreadsheet Assistant	99
Pers. Finance Assist. (great reports)	45
Busicalc (Spreadsheet)	55
Coco II (build your own games easily)	45
Home Accounting Package	39
General Ledger, A/R, A/P (with check writing)	ea. 139
CBM EasyFinance	50
CBM EasyScript	80
CBM EasyFile	80
Data Manager	70
Stock (investment analysis)	80
Pet Emulator (emulates 4.0 basic)	30
Sprite-Magic (use joystick to design sprites)	19
Assembler Package (cassette or disk, compiled, includes editor, loader, disassembler)	39
Spacebelt	20
Retroball	34

## INTERFACES & ACCESSORIES

80 Column Expander	\$159
VIC 1600 Modem	95
VIC 1650 (auto answer, auto dial)	150
VIC 1525 Graphic Printer	329
VIC 1530 Datasheet Recorder	65
VIC 1541 Disk Drive	329
VIC Switch (connect 8 64's or Vics to printer, dd)	149
IEEE Interface (64)	85
PET-IEEE cable	33
IEEE-IEEE cable (2m)	43
Parallel Interface (Epson, Okidata, IDS, NEC)	80
RS-232 Printer Interface (Okidata, Diablo, etc.)	60
Programmers Reference Guide	18
Verbatim Diskettes (10 per box)	26
Victree (Programmers Utility)	75

## VIC PRODUCTS & ACCESSORIES

8K RAM Memory Expansion Cartridge	\$ 40
16K RAM	70
24K RAM	105

VIC IEEE Interface	75
VIC 3 Slot Expander	27
VIC 6 Slot Expander	70
RS-232 Printer Interface	65
Cassette Interface	27
Home Finance Package (6 tapes)	47
Gorf (64 also)	30
Omega Race	30
Arcade Joystick - Heavy duty w/2 firing buttons! Great for the VIC or 64	25

## MONITORS - GREAT RESOLUTION (64 OR VIC)

Amdek Color I	\$ 299
Amdek II or III	call
Panasonic CT160	279
Comrex 6500 - 13" Color	299
Transtar 20 (High Resolution Green Phosphor)	129
Video/Audio Cable	15

## PRINTERS - LETTER QUALITY

CBM 8300, 40 cps	\$1450
Diablo 620, 25 cps	949
ComRiter, 17 cps	819
Transtar 130, 16 cps (auto load, wp features!)	769
NEC 7700 series	2350
NEC 3500 series	1600

## PRINTERS - DOT MATRIX

CBM 8023, 150 cps/graphics	589
Epson FX Printer, 160 cps	529
Epson MX-80 w/ Grafrax	349
CBM Graphics for Epson	65
Okidata 82A, 120 cps (serial and parallel)	429
NEC 8023A (parallel)	439
Okidata 92	559
Star Gemini, 10	360
Star Gemini, 15	499

## COMMODORE BUSINESS SERIES

SuperPet (5 languages, 2 processors)	\$1409
CBM 8032 Computer, 80 Column	1029
CBM Memory Expansion, 64K	359
CBM 8050, 1 mg. Dual Drive	1259
CBM 8250, 2 mg. Dual Drive	1500
CBM D9060, 5 mg. Hard Disk	2240
CBM D9090, 7.5 mg. Hard Disk	2600
CBM 2031, 170K Single Drive (New)	489
DC Hayes Smart Modem	220

## BUSINESS SOFTWARE

WordPro 4+ or 5+	\$ 309
Administrator	489
VisiCalc (expanded)	199
The Manager (database)	199
BPI A/R, G/L, Job Cost, Inventory, Payroll	ea. 325

## MasterCard, Visa, Money Order, Bank Check

COD (add \$5) accepted.  
Add 3% surcharge for credit cards.  
In stock items shipped within 48 hours,  
F.O.B. Dallas, Texas  
All products shipped with manufacturer's  
warranty.

Prices are subject to change without notice.

**TO ORDER  
CALL TOLL FREE  
800-527-4893  
800-442-1048  
(Within Texas)**

Business Hours  
Mon.- Fri. 8 to 6, Sat. 10-2

Write for free catalog.

## GAME OF THE MONTH

Adventu-Writer (make your  
own adventure game) ..... 39



## SJB DISTRIBUTORS INC.

10520 Plano Road, Suite 206  
Dallas, Texas 75238

**(214) 343-1328** Circle No. 18



by John Steiner

Last month I commented about accessories that connect to the RF output of the CoCo and provide video output for a monitor. I was not precisely correct: the monitor adapter hooks into the input of the modulator. The unit from Computerware requires removal of the 1372 video IC, which is installed in a socket that comes with the kit. They are reinstalled as a package in the 1372 socket. Three wires leave this assembly to provide power and video to the preamplifier circuit board. The board is postage-stamp size and can be attached to the RF modulator case with the double-stick foam tape provided. A single clip is attached to the audio input line of the modulator, and a jumper is provided that must be cut if you are using a color monitor. Two cables exit the assembly, allowing separate audio and video signals to be available.

Needless to say, I had to justify the purchase of this board, so I bought a green screen monitor. The conversion was worth the expense as the crispness and clarity compared to a television are amazing. The RF output is available in addition to the video signal, which is a real advantage for demonstration purposes. There is a disadvantage in that selecting black and white mode kills color at the RF output, while selecting color puts a fine cross-hatch pattern on the monitor, making it difficult to read. Interestingly, high-resolution color graphics are still available in B/W mode even though there is no color-burst signal present.

Recently I had a long chat with Bob Rosen of Spectrum Projects. While talking with Bob about using the Color Computer with a TV, the subject of radio frequency interference (RFI) came up. If you own a CoCo disk system, probably you are already aware of interference caused by the drive cable. Repositioning and coiling the video cable have been my only remedies for the problem, and yet the interference still persisted. In addition, selecting the 64K RAM mode increased the interference to a point where it was extremely annoying. The problem was one of the major reasons I wanted to use a monitor, which isn't affected by RFI.

Bob suggested a solution to the problem: replace the standard audio-type cable Radio Shack provides to connect CoCo to the monitor with a higher-quality 75-ohm video cable with phono plugs installed. The cable can be made easily using RG-59 Coax and two RCA-style phono plugs; or many video specialty stores have them readily available. I have a video dubbing cable I purchased for my video tape recorder that contains video and audio lines. Replacing the Radio Shack cable significantly decreased the interference, though it was not eliminated entirely. My next step will be to coil the cable through a 1-inch toroid coil.

While on the subject of video interference, removing the TV/computer switch, running the cable directly to the coax inputs or through an adapter to the 300-ohm VHF terminals is advantageous. Don't try to ground the cable or shield to the TV set chassis ground, as I have heard some people suggest. Connecting to chassis on many TVs may be unhealthy, not only to your computer equipment, but to yourself. Some TV chassis are tied directly to the AC line terminals, and connecting the TV plug backwards would be an unforgettable experience.

If you do much work with machine-language files, probably you have wished that you could log the start, end, and execute addresses of your files. Ken Christiansen provides a short utility that will provide you with that pertinent information from either a disk or tape machine-language file. To use the routine, first load (or CLOAD) the program in listing 1, then load your machine-language file. Once loaded, type RUN. The screen will clear and provide both decimal and hex values for the file. There are a few limitations: first, HEX\$ is available only on Extended Color BASIC CoCos. Secondly, auto executing programs and programs that must occupy workspace required for listing 1 must be loaded with an offset. For example, CLOADM "filename", 2000 will load the program 2000 bytes higher than it normally resides.

Last month I promised to comment further on FLEX as I get more accustomed to working with it. For those who may not be familiar with

using a DOS, commands may be memory-resident or disk-resident. If you specify a command, the DOS first looks in memory to see if the command routine is stored there; if not, it turns on the drive and searches the disk. This allows the flexibility of writing your own commands, which can be added to the disk. If a command is not on the disk, a "NOT FOUND" response is printed.

Most commands can be given with files or operation data specified after the command. For example, "LIST, <filename>" will list the textfile called filename to the CRT or terminal. "DATE,month,day,year" will install a new date. In all, there are over 50 commands, files, and utilities included in the package. The EXEC command has the ability to execute FLEX commands stored in a text file. For example, initializing a new disk requires at least three separate commands. These commands can be stored in a textfile and implemented by typing "EXEC, filename." Each command in the file will be read and executed. You can use the BUILD command to build a textfile that contains the desired commands. BUILD is not a text editor but allows entry of single lines of text.

FLEX files can be individually protected, unlike R/S DOS, by using the PROT command. Files can be write-, delete-, or catalog-protected. A write-protect automatically delete-protects as well. The catalog-protect prevents the file from being displayed during a CATALOG command.

### LISTING 1

```
10 CLS : P=PEEK(487)*256 + PEEK
(487)*256 + PEEK(488) : PRINT
"START DEC";P; : PRINT "HEX";
HEX$(P) : 'START
20 P=PEEK(126)*256 + PEEK
(127)-1 : PRINT "END DEC";P;
: PRINT "HEX";HEX$(P) : 'END
30 P=PEEK(157)*256 + PEEK(158) :
PRINT "EXEC DEC";P; : PRINT
"HEX";HEX$(P) : 'EXEC
```

You may contact Mr. Steiner at 508  
Fourth Ave. NW, Riverside, ND 58078.


# BUSIWRITER



## BUSIWRITER A Honey of a Word Processor

Why word processors?

Word processors allow the user to quickly and easily create letters, memos, notes, reports, term papers, manuals, poetry and any other written information using the memory of the computer as a pencil and paper. The computer display or terminal acts as a window through which the user views the information as it is entered. The outstanding advantage of using BUSIWRITER is that it acts not only as a pencil and paper but as a perfect eraser and automatic typewriter.

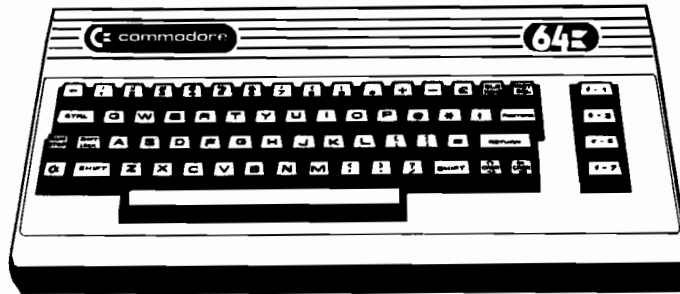

### For Commodore CBM-64

Commodore 1515, 1525, Epson, C. Itoh, Qume, Diablo, NEC Spinwriter, Starwriter, Prowriter, Okidata, Microline, Gemini-10

And many more printers

### BUSIWRITER The Queen Bee of Word Processors

BUSIWRITER allows the user to quickly and easily make any number of alterations to the text. BUSIWRITER will instantly reformat your text and show you exactly and continuously how the final output will appear. BUSIWRITER has more functions than any other known microcomputer word processor. With BUSIWRITER assisting in the entry of text, providing a **20 page memory** and performing an enormous number of editing/composing functions, the preparation of written data is far faster and outstandingly more accurate than if it were prepared by hand.



### BUSIWRITER With the Sting Removed from the Prices

**BUSIWRITER 64** ..... only **\$99.00** for the CBM 64

**BUSIWRITER AVAILABLE NOW FROM YOUR LOCAL DEALER**

**(800) 227-9998**

**FOR THE NAME OF YOUR NEAREST DEALER**

California, Canada, Alaska and Hawaii please call (415) 965-1735



**Skyles Electric Works**

231G South Whisman Road  
Mountain View, CA 94041

Circle No. 19

Europe please contact Supersoft, Winchester House, Harrow Wealdstone, England HA3 7SJ, Tel. 01 861 1166



# APPLE II OPERATING SYSTEMS

by Phil Daley

The operating systems that I have seen available for the Apple use essentially the same read/write routines, but they have been modified or changed. All the disks created by any one system can be read by any other system if you know the procedure. Modifying disks to make them copy-protected (unreadable) is a different technique and a different topic. The Operating Systems covered in this article all use standard DOS 3.3 format disks. The list is as follows: DOS 3.3®, Pascal®, ORCA/M®, Flex®, OS-9® and CP/M®. There are also many varieties and colors of patches and fixes for DOS 3.3 on the market, ranging from Craig Peterson's and the Floeters' articles in *Nibble* to 'DIVERSI DOS' and 'MASTER DOS'.

Except for ORCA, all of the systems have a special {format} command. Whether a user types 'INIT', 'NEWDISK' or 'FORMAT' the results are a disk that is DOS 3.3 compatible as far as the individual sectors are

concerned. The difference is in the boot program installed (or not installed) on the disk, and the directory and other housekeeping type sectors (for instance: the VTOC) written to various tracks on the disk. Having talked to some of the individuals responsible for converting operating systems for other microcomputers to the Apple, I discovered that the lowest common denominator and the reason for this compatibility at the low level is the DISK II Apple disk drive and controller card, which impose certain hardware limitations on the software involved.

**DOS 3.3 from Apple Computer Co.**

Other than the CONTROL-D kludge, the standard operating system is highly efficient, moderately user friendly, and extremely error free. Other than the misadventures I had with a Corvus Systems hard disk running DOS 3.3, I have crashed a disk only two or three times. Apparently the people at Corvus do their field testing on the first group of unsuspecting customers that come along, with

work the first time because of the lack of a carriage return.

The only file-handling capability that I find missing is a 'LIST' function for textfiles. It would be convenient not to have to run a file reading program to see what is in a particular file.

The technique of a track/sector list of program sectors seems to waste disk space at first glance. (If you want to

talk about waste, consider RS DOS for the Color Computer. The minimum amount of information that can be read or written is a granule — 2,304 bytes of information: one half of a track.) The extra space required for short programs is more than compensated for in quick disk access using random records on large files. DOS is able to calculate the exact track and sector that any particular random-access record resides on, and immediately seek that sector. This is a tremendous improvement over the sector-

linking so prevalent in other systems.

The best consideration for using Apple DOS is that most of the commands are loaded into RAM and stored there while the computer is left on. This means that disk access to a system disk is kept to the absolute minimum and a program rarely requires a specific system program to reside on the program disk (for example, the 'CHAIN' program). In addition, a single drive system is a practical reality. This is not true of the other systems available.

There are also many different patches to the standard DOS on the market today. If one fits a specific

*(Continued on page 23)*



predictable results. I was able to resurrect most of the files on my crashed disks using a disk zap program.

Due to the lack of disk commands in the BASIC ROM, it is necessary for DOS to intercept all of the commands and check to see if any particular one is a disk command. This is facilitated (for DOS, not for us) by placing a CHR\$(4) at the beginning of every disk command. It is also wise policy to place a CHR\$(13) immediately preceding the CONTROL-D to insure that DOS sees it. That is the 'basic' problem with Apple DOS. I can't remember how many programs I've written that didn't

# OMEGA INTERNATIONAL

## SAVE ON ... COMPUTERS • MONITORS PRINTERS • PERIPHERALS • SUPPLIES\*



**OMEGA  
BLOCKBUSTER  
SPECIAL**

**AMDEK  
COLOR I MONITOR**

**\$289** Manufacturers  
Suggested  
Retail Price  
449.00

Offer Good Thru 5/31/83

### NEW! EPSON FX-80 PRINTER

Now Available  
For Immediate Delivery!

- Up To 160 cps • 11 x 9 Matrix • Pinfeed Platen
- Proportional Spacing • Graphics • Elite Pitch
- Centronics Parallel Interface • Internal 2K Ram

It's All New...And It's OMEGA PRICED!  
For Our Price...CALL 1-800-343-0873 TODAY!

#### SAVE ON LETTER QUALITY PRINTERS

DIABLO 620 New Low Price .....	<b>929.00</b>
DIABLO 630 w/API & cable .....	<b>1,749.00</b>
NEC 3510 SPINWRITER .....	<b>1,399.00</b>
NEC 7710 SPINWRITER .....	<b>2,045.00</b>
NEC 7730 SPINWRITER .....	<b>2,095.00</b>

#### DOT MATRIX PRINTER BARGAINS

C-ITOH PROWRITER 8510 AP .....	<b>399.00</b>
IDS MICROPRISM 480 .....	<b>549.00</b>
OKIDATA MICROLINE 92 (NEW) .....	<b>549.00</b>
OKIDATA MICROLINE 93 (NEW) .....	<b>859.00</b>
STAR MICRONICS GEMINI 10 .....	<b>349.00</b>

#### BIG SAVINGS ON ACCESSORIES

HAYES SMARTMODEM 300 Baud .....	<b>230.00</b>
HAYES MICROMODEM II (APPLE II) .....	<b>289.00</b>
MICROSOFT SOFTCARD PREMIUM SYSTEM .....	<b>459.00</b>
ORANGE MICRO GRAPPLER + .....	<b>120.00</b>
PKASO PRINTER CARDS .....	<b>129.00</b>
RANA ELITE I (APPLE II) .....	<b>299.00</b>
SIGNALMAN MODEMS (MK I) As Low As ..	<b>85.00</b>

#### MONITOR SPECIALS FROM OMEGA

AMDEK 300 G .....	<b>139.00</b>
AMDEK 300 A .....	<b>165.00</b>
NEC JB1260 .....	<b>119.00</b>
NEC JB1201 M .....	<b>169.00</b>
USI Pi-2 12" GREEN MONITOR .....	<b>159.00</b>
USI Pi-3 12" AMBER MONITOR .....	<b>179.00</b>

#### ACCESSORIES & SUPPLIES

OMEGA Has A Complete Line of Accessories & Supplies for the Apple II and many other Popular Computers by manufacturers like:

- D. C. Hayes • Microsoft • Tymac
- M & R Enterprises • Mountain Computers
- Kensington Microware • Practical Peripherals
- T.G. Products • Videx

#### SOFTWARE

Omega Carries Software by the following companies:

- American Business Systems • Ashton Tate
- Dakin 5 • Innovative Software • Microsoft
- Sorcim • Stoneware • Visicorp

#### MAGNETIC MEDIA

OMEGA Stocks Diskettes by:

- Dysan • Elephant • Maxell • Verbatim
- All Equipment Factory Fresh w/ MFT Warranty
- Prices Do Not Include Shipping Charges
- Mass. Residents Add 5% Sales Tax
- All Returns Subject To Restocking Fee

**CUSTOMER PICKUP NOW AVAILABLE**  
334 R Cambridge St., Burlington, Mass.  
(617) 229-6464



**CALL TOLL FREE!**  
**1-800-343-0873**  
Call Toll Free for Ordering.  
All Others call (617) 229-6464

**CHARGE IT!**  
MasterCard / Visa  
WELCOME AT NO  
EXTRA CHARGE

\* PRICES, SPECIFICATIONS AND AVAILABILITY OF ADVERTISED MERCHANDISE SUBJECT TO CHANGE WITHOUT NOTICE

UNADVERTISED SPECIALS ON • COMREX • EPSON • NEC • IDS PRISM • OKIDATA

# OMEGA INTERNATIONAL

334 R CAMBRIDGE STREET, BURLINGTON, MA. 01803

# ARK COMPUTING

P.O Box 2025  
CORONA, CA 91720

(714) 735-2250

WORD PROCESSORS		
	List	ARK
Magic Window	99.95	69.95
Magic Window II	149.95	99.95
Bank Street Writer	69.95	54.95
Pie Writer	149.95	109.95
Easywriter	99.95	69.95
Pro Easywriter	175.00	119.95
Screenwriter II	129.95	79.95
Word Handler	199.00	134.95

**ARK'S  
APPLE  
Software!**

BOOKS	List	ARK
Apple Graphics		
Arcade Book	19.95	15.95
Book of		
Apple Software	19.95	15.95
Elem. Apple	14.95	11.95
Beneath Apple		
DOS	19.95	14.95
Kids & the Apple	19.95	14.95
*Using 6502		
Assem. Lang.	19.95	11.95

Beagle Bros.	List	ARK
Alpha Plot	39.50	29.95
Apple Mechanic	29.95	21.95
Beagle Bag	29.50	21.95
DOS Boss	24.00	15.95
Flex Text	29.50	21.95
Frame up	29.50	21.95
Tip Disk #1	20.00	14.95
Typefaces	20.00	14.95
Utility City	29.50	21.95
Pronto DOS	29.95	21.95

**LISA**

In celebration of the arrival of the new Apple Lisa Computer to **ARK'S** office, we are having a **SPECIAL** on the **APPLE II, II+** and **IIe** programs of the same name...

LISA	49.95	79.95
LISA ED SYS.	74.95	119.95

SPECIALS		
	List	ARK
Axlon RAM		
Disk 320	1395.00	1099.00
Wizard		
16K BPO	179.00	119.95
S.A.M.	124.95	84.95
Videx Combo	375.00	235.00

**Disk Drives at BLOWOUT PRICES!!!**

High quality "Slim-Line" disk drives produced by TEAC

Single Drive	259.95
Single Drive w/Controller	299.95
2 Drives w/Controller	549.95

UTILITIES	LIST	ARK
Anix	49.95	39.95
Apple Doc	39.95	29.95
Appewriter		
Preboot	19.00	15.00
Bag of Tricks	39.95	29.95
The Dictionary	99.95	69.95
Disk Recovery	30.00	21.95
Transend II	149.00	119.95
Dosource	39.95	24.95
E P F IV	79.95	49.95
Lazer Pascal	39.95	29.95
Graforth	75.00	54.95
ALDS	125.00	89.95
Multi Disk		
Catalog III	24.95	19.95
Sensible Speller	125.00	89.95
Super Disk		
Copy III	30.00	21.95
TASC	175.00	129.95
UCSD P-System		
Software Set	635.00	450.00
Graphics Magician	59.95	49.95
Visualc Preboot	49.95	39.95
Locksmith	99.95	69.95
Inspector (Disk)	59.95	49.95
Watson (Disk)	49.95	39.95
*Omega Pack	209.85	145.00

(Locksmith, Inspector, Watson)

Peripherals	List	ARK
*ALS CP/M Card	399.00	334.95
CPS Multi-		
function Card	239.00	149.95
Guardian Angel	595.00	499.95
Kraft Joystick	64.95	49.95
The Mill Pascal		
Speed-up kits	369.00	289.95
Micromodem II	379.00	264.95
Micromodem		
w/Term Pack	409.00	309.95
Microsoft		
Premium Pack	685.00	494.95
Microsoft		
16K Ram Card	99.95	69.95
Parallel Interface	139.50	64.95
Microbuffer II	295.00	219.95
RAM Plus 16K	189.00	139.95
STB 128K		
Memory Card	499.00	359.95
Super Fan II	79.95	59.95
Super Switcher	295.00	219.95
*212 Smartcat		
1200 Baud	595.00	499.95
Versa Card	199.00	149.95
Graphics + Plus	159.95	99.95
Z80 Softcard	345.00	224.95

**Don't Miss The Boat . . . Upgrade your Apple II & II+ to an APPLE IIe!**

	List	ARK
Lazer Lower		
Case + Plus	64.95	29.95
Lazer Keyboard		
+ Plus	99.95	49.95

These two enhancements working together allow upper/lower case with shift key, full 128 character keyboard and a 64 character type ahead buffer which allows faster data entry.

To further upgrade your Apple II System, buy both the Lower Case Plus and the Keyboard + Plus then choose on of the following outrageous offers!

16K Ramcard	49.95
WIZ-80	144.95
Omnivision	99.95
Character Set + Plus	5.00


DISKETTES		
	List	ARK
Elephant 5 1/4"s/s		
s/d (box of 10)	29.95	19.95
Verbatim 5 1/4"s/s		
d/d (box of 10)	45.00	29.95
Verbatim 5 1/4" d/s		
d/d (box of 10)	65.00	44.95

MONITORS		
	List	ARK
*Comrex 12" Gr.	149.95	89.95
NEC Gr. Screen	285.00	169.95
Amdek Color I	449.95	349.95

Great Games		
	List	ARK
*Mandy's new all time favorite . . .		
Miner 2049er	39.95	29.95
Pinball		
Constr. Set	39.95	29.95
Zaxxon	39.95	29.95
Eggs It	29.95	21.95
Dark Crystal	39.95	29.95
Time Zone	99.95	69.95
Blade of		
Blackpoole	39.95	29.95

**DISCLAIMER**

WE ACCEPT VISA/MASTERCARD, PERSONAL CHECKS (ALLOW 10 DAYS TO CLEAR) OR COD (\$2.00 CHARGE). PLEASE INCLUDE 3% FOR SHIPPING (\$2.00 MIN.) OR 5% FOR BLUE LABEL (\$3.00 MIN.). FOREIGN SHIPPING 10% (\$5.00 MIN.). CALIFORNIA RESIDENTS ADD 6% SALES TAX. ALL ITEMS ARE NEW AND CARRY MANUFACTURERS WARRANTY. PRICES AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

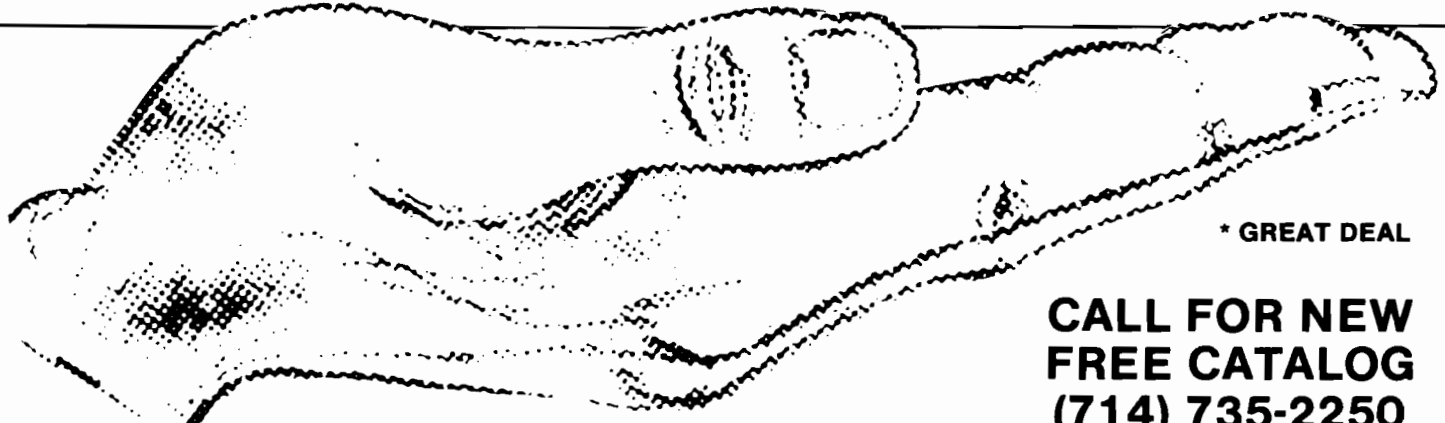

\* GREAT DEAL

**CALL FOR NEW  
FREE CATALOG  
(714) 735-2250**

(Continued from page 20)

application you can use, then by all means, use it. Generally speaking, none of them do everything well, or even the same as standard DOS, and many of them won't work on anything that is sophisticated - assemblers/editors, word processing, or programs with a write-protection scheme. In other words, about 75% of my disks. If you have a large collection of simple BASIC programs, then one of these may suit you quite well.

### PASCAL from Apple Computer Co.

The Pascal operating system requires a 16K RAM card in slot 0. I certainly recommend an 80-column card in slot 3. Having worked in Pascal in 40-column mode, I found it difficult to follow the screen flipping sideways to accommodate the long lines. A nice option is to have a clock card, such as the CPS Multi-function card, included. This will set the system date for you and allow a parallel printer in slot 1 and serial I/O in slot 2.

The text editor is powerful and easy to use, once you get the hang of it. The assembler is a non-standard version, which I avoid using when possible. The compiler is too fussy, and while diagnosing a zillion errors, should correct some of them for you, especially the silly ones, like where all those ';'s belong.

If Pascal were easier to use, I might be tempted to write more programs with it. A straightforward writing of the simplest program starts with

1. Loading the OS from APPLE1.
2. Calling the text editor.
3. Typing in the appropriate program text.
4. Saving the WORKFILE.
5. Exiting the text editor.
6. Calling the compiler (that's when you discover all those 'syntax errors').
7. Making a list of the mistakes.
8. Calling the text editor.
9. Correcting the errors.
10. Saving the WORKFILE.
11. Quitting the text editor.
12. Compiling the program.
13. Executing the program.
14. Discovering a flaw in the program logic (which sends you back to step 7). That's assuming you corrected all the syntax errors on the first go-round.

Not only is this process inconvenient, but the system drive has to be on-line most of the time, or you get 'diskitis' of the thumb from swapping disks. A two-drive system is minimal but three are better. If you really want to cut the turn-around time between edit/compile, get a hard disk. They were invented with Pascal in mind.

I did not intend to give the impression that I don't like Pascal as a language. I just don't like the Apple implementation. A microcomputer is a one person computer and shouldn't make you wait. If you are familiar with time-sharing systems that make you wait no matter what language you are using, then Pascal is probably a better choice than some of the other languages available on those systems.

### ORCA/M from Hayden Software

A new entry into the language development system market, ORCA/M is a self-contained OS and (currently) assembler. In the near future, Hayden intends to add a Pascal compiler into the system. (All the commands are already included.) The Operating System is packed into \$B000-BFFF. Some of the system is also incorporated into the various overlaying parts of the program - text editor, assembler, linker and soon-to-be compiler.

While omitting the BASIC file commands (for obvious reasons), they have included several disk utilities not normally resident in Apple DOS: a PEEK command that invokes a sector editor; a VOLUME command that sets the disk volume number; a TIME command for the current date and time (if you have a clock); an APPEND command that adds a disk file to the current file in memory; a CHECK command that looks for bad sectors, lists a warning if a file is endangered and marks the sector as unusable in the VTOC; a COMPRESS command to either alphabetize the directory or move deleted files to the end of the directory; a COPY command that works like 'FID'; a RESTORE command to restore deleted files; and a SWITCH command to switch directory entries in the catalog.

All commands are memory resident and may be abbreviated to the shortest definable string. The command search is linear, so that a 'C' command would produce the first command with start-

ing with a 'C'. To address a different 'C' command, only enough letters have to be typed to distinguish it from the other 'C' commands.

The text editor produces 'S' (for Source) type files, and the assembler creates 'R' type relocatable object files. The R file must be 'linked' into an address-oriented, BRUNable binary file. During linking, a subroutine library is searched for undefined addresses, allowing the addition of often used routines to the program without having to manually include them in the source file. ORCA/M has a SUB.LIB file with a raft of subroutines for your use. The assembler uses a fairly standard source file format.


### Flex for the Apple from Norell Data Systems

Norell has adapted TSC Flex for the Apple computer using their FLEX09 6809 board. Flex is a small, easily adapted OS because it is mainly disk resident. Almost all of the commands reside on disk and are called into use by typing the appropriate command name. This means the system commands are easily modified or appended because each module is an executable binary file. It also means the system disk must be on-line all the time. Two drives are necessary to perform most functions.

The TSC text editor that comes with the system is an elemental line-oriented editor. It would be great with a hard-copy terminal, but most of us work with CRTs. Now, I have some good and some bad news. The good news is that there are several good screen-oriented text editors available for Flex. The bad news is that you would have to get the source file and type it into the Apple, because the disk format is totally different at the hardware level.

Flex has several convenient commands from the system level. The 'P' and 'O' commands, prefaced to any other command, send the output to printer or disk respectively. The 'LIST' command will print any ASCII (BASIC or Text type) file. 'APPEND' will join any number of files (of any type) together into a single file. 'COPY' is like 'FID', including wildcards, but has no prompting. Sometimes you copy programs you didn't intend to by mistake.

A nice feature of Flex is the ease of changing the system commands. At MICRO, we have rewritten several of the commands and added several com-



mands to the original list. Any 6809 machine-language executable file can be a command if its name ends with '.CMD', and it can run at \$C100.

Unfortunately, TSC's extended BASIC is not available as of this date, but Norell Data Systems considers implementation of the Apple version a high priority.

## OS-9 from MICROWARE

OS-9 is a newer and more advanced operating system than Flex. Flex is a holdover from the 6800 microprocessor days and was rewritten in 6809 code, but not updated. OS-9 was originally written in 6809 code and utilizes the capabilities of the microprocessor more fully. It includes more advanced technology, such as multi-tasking, and in its higher levels, a multi-user environment.

The OS commands are similar to Flex: they are disk resident and called when needed. However, OS-9 allows loading commands into memory as an option, and removing them when they are no longer needed. Since OS-9 takes up more room in memory than Flex, I still recommend two disk drives.

I don't have access to another system that runs OS-9, so I can't compare it to a standard implementation. The Apple OS-9 disks are DOS 3.3 compatible, and as such must not be compatible with the rest of the OS-9 world.

It is a real pleasure, when working with a word processor, to finish one letter and send it to the printer, while at the same time, working on the next letter on the stack without having to wait for the printer to get done before starting in again [there goes the coffee breaks]. There doesn't seem to be any particular limit to the number of tasks that can be specified to run at the same time, and I gave up after running four tasks simultaneously.

The BASIC that comes with OS-9 is called BASIC09 and is the most Pascal-like language I have seen, without being called Pascal. It includes named procedures with parameter passing, data typing, print using, IF. THEN. ELSE. ENDIF, REPEAT. UNTIL, WHILE. DO. ENDWHILE, LOOP. ENDLOOP, EXITIF. THEN. END EXIT, and variables and line numbers (optional) local to procedures. The text editor checks syntax during line entry, and loop and subroutine nesting upon exit from the editor. It almost makes

BASIC too easy. Compilation is fast and errors return you to the text editor, text file intact. A trace mode aids in debugging. The BASIC file can be PACKed to remove REMs and spaces and reduce the space requirements of the program. BASIC09 computes to 9 decimal digits.

The text editor is line-oriented, common to most BASICs. It uses commands to move from line to line, as line numbers are optional, includes line insert and delete, and has string search and replace. The Debug mode allows controlled program execution, trace on/off, variables examined/changed, procedure-nesting listing and stepping one or more steps through the program.

BASIC09 improves many of the shortcomings of the standard BASIC language by incorporating ideas and structures of the PASCAL language, without adding the faults of PASCAL and losing the interactivity of BASIC.

## CP/M from Digital Research

The Appli-Card from Personal Computer Products, Inc., arrived at our office too late to be included in last month's new boards article, so I will briefly mention its attributes now. The board includes a six megahertz Z-80 microprocessor and 64K of RAM. The software includes CP/M 2.2 and drivers for an 80-column card or a 70-column hi-res display, horizontal scrolling of up to 255 characters screen width, and display of all 96 printable ASCII characters. It also has a rewritten FORMAT command that includes formatting, copying the CP/M tracks, and disk copy.

The documentation is clearly written in a step-by-step fashion that should allow someone without extensive computer knowledge to install an Appli-Card and have it running in less than 30 minutes. I also booted up Wordstar, MBASIC, GBASIC, and FORTRAN in less time than it takes to write about it. I waited about eight months to receive this card, and it was worth the wait.

The only problem that I've found is that the CPS Multi-function card software won't recognize the Appli-Card as a CPM card, and the program exits immediately, meaning that I have to use the old Apple Serial card to do my printing. The company is currently working on drivers for specialized cards.

The Control Program for Microcomputers is probably the most popular microcomputer operating system, and if you are looking for a system with a large installed base and corresponding software availability to add to your Apple (no small amount of software already), then CP/M is the system for you. In spite of its problems and slowness, the number of people currently using the system assures its place in the future of microcomputers.

One complaint is that the DIR command does not display the length of the files, although that can be determined with the STAT command. Another complaint is the amount of memory that CP/M requires compared to DOS. A standard 48K Apple without DOS (just for reference, not really too useful — have you used a tape recorder lately?) has 47101 bytes of free memory. Adding DOS to the system reduces the total to 36349 bytes. With MBASIC you have 32883 bytes free without the use of hi-res graphics. GBASIC contains hi-res graphics commands and further reduces the amount of memory free to 23793 bytes. That is on a 64K Z-80 board. If you have a RAM card in slot 0, you can increase the amount of space available for programs to 46076 bytes by moving DOS onto the card.

The Microsoft BASICs available, both M and G, are a more standard implementation [like the big machine versions] than Applesoft, and are easier to learn for someone who knows another BASIC. The file commands eliminate the Control-D, and include reading EOF. The text editor also allows whatever indentation and line spacing that you desire.

## Wrapping it all up

Since the Apple is so versatile due to its plug-in slots and OEM support by Apple Computer, many additional operating systems are available that increase the quantity of useable software. The one big disadvantage with all the other systems is the lack of disk compatibility between the Apple Disk II and other microcomputer disk drives. This means that while the programs will execute without many changes, getting the programs into Apple disk format is the biggest hurdle.

**MICRO™**

---


You may contact Phil at MICRO, P.O. Box 6502, Chelmsford, MA 01824.

---

# TAKE COMMAND OF PLAYER-MISSILE GRAPHICS



## PM animator

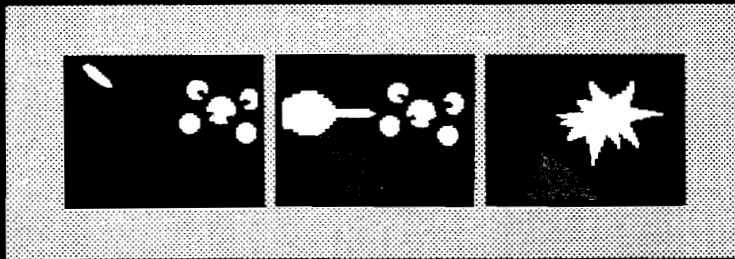

by Roger Bush

You can write brilliant animated graphics in Atari BASIC—without any bit-mapping, and without knowing machine language.

All you need is **PM ANIMATOR**, the new Player-Missile Graphics toolkit from **DON'T ASK**.

**PM ANIMATOR** makes it easy to: draw pictures and animate them, change your drawings and animation sequences, save your graphics creations on disk, and build them into your BASIC programs. You do it all with Player-Missile Graphics. You do it from BASIC, using two almost magical editors, plus **PM ANIMATOR's** special subroutines for Player-Missile Graphics control.

Create the most visually exciting software you've ever written. The power is yours.

Have your software dealer demonstrate **PM ANIMATOR**. Includes numerous demos and detailed owner's guide/tutorial. Requires 32K, disk. Suggested retail: **\$34.95**.

Also available by mail from **DON'T ASK**. Send check or money order for \$34.95 + \$2.00 shipping/handling; California residents add 6% sales tax (6.5% if you reside in L.A. County).


Atari is a trademark of Atari, Inc.

### DON'T ASK COMPUTER SOFTWARE

2265 Westwood Blvd., Ste. B-150  
Los Angeles, California 90064  
(213) 477-4514

## PHONE RIGHT IN WITH Teletari

*The Friendly Terminal*  
by Harry Koons

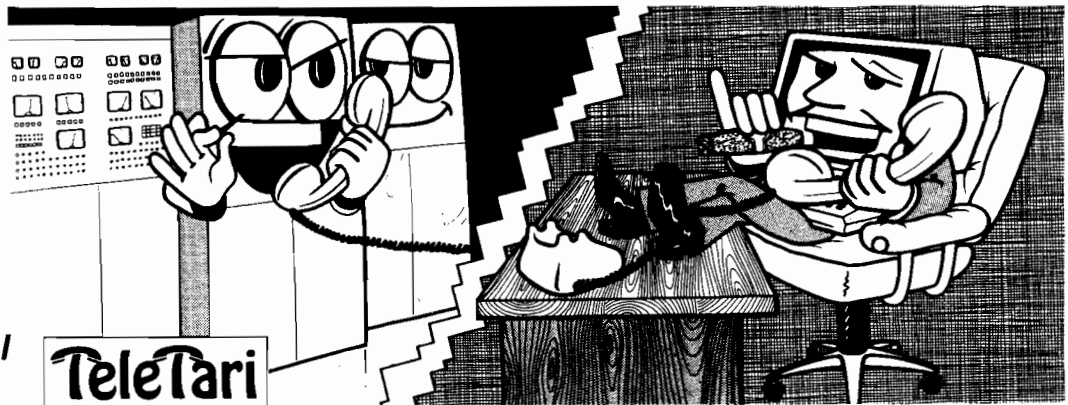

Want to put your Atari in touch with other computers? **TELETARI** is just what your modem needs: a powerful telecommunications program that's a breeze to use. Choose the functions you want from a menu. Send or receive text or programs, save new data on disk, or print it on paper. A buffer of up to 20K bytes holds your data; page through it to find what you want. Adjust and save terminal parameters with another menu.

**TELETARI** is adaptable to most remote computers and most modems, including 1200 baud modems. It works through the RS232 port on the Atari 850 Interface, and it's suitable for any RS232 application and supports all 850 options. It's also compatible with the Bit 3 Full-view 80™ board.

Ask your software dealer for **TELETARI**, by **DON'T ASK**. **\$39.95**. Requires 32K, disk, BASIC, 850 Interface.

### DON'T ASK COMPUTER SOFTWARE

2265 Westwood Bl., Ste. B-150  
Los Angeles, CA 90064  
(213) 477-4514

Or order by mail direct from **DON'T ASK**. Add \$2.00 shipping/handling to your check or money order. Calif. residents add 6% sales tax (6.5% if you reside in L.A. County).

Dealer inquiries welcome

Circle No. 22

Atari is a trademark of Atari, Inc. Full-view 80 is a trademark of Bit 3 Computer Corporation.



# U.C.S.D. PASCAL DIRECTORY

**A byte and bit-level demonstration of a brute force method to access U.C.S.D. directory blocks.**

by Steven Lesh

The Filer program, which comes as part of the Apple Pascal Language System, provides the applications software *developer* with a number of useful capabilities; e.g., listing titles for files currently in the diskette directory, deleting files from the directory, and changing the date to be associated in a directory entry for each newly written file. Unfortunately, these capabilities are not conveniently available to the applications program *user*.

In this article, the format of the Apple Pascal diskette directory is examined. In addition to information about specific files, the first directory block contains information relating to the entire diskette. Since the structure of the fields containing this information resembles that of functionally similar fields for a file directory entry, the format for a directory entry is covered first.

The Apple Pascal Language System supposedly conforms to U.C.S.D. Pascal specifications, and so what you read here should apply to other implementations of U.C.S.D. Pascal as well. Hopefully, enough information about directory entry formats will be

provided to allow you to develop most directory-related capabilities your applications software might require. Following the article is a listing for an intrinsic unit that demonstrates how to access file directory entries.

The FILELIST unit source code accompanying this article provides a 'bare bones' directory list capability. It performs a function similar to the U.C.S.D. Pascal Filer L{ist Directory command. FILELIST differs from the Filer L{ist command in that it allows the user to restrict the directory listing to titles for a specific file type even though the file name contains no information about what type of file it is. The procedure INITITTLERead permits a user to specify a drive number from which the directory is to be read, choose between displaying a file titles list on the monitor or listing it on the printer, and to select the type of file for which directory entries are to be listed (i.e., text, code, or data). If this information is already known, the procedure TITLERead can be called directly.

Non-Apple users may have to change the starting and ending directory block addresses (STARTDIR and ENDDIR in FILELIST) to addresses applicable to the U.C.S.D. Pascal implementation for their system.

To illustrate the format of a diskette directory entry, let us examine an entry

for the file 'SYSTEM.WRK.TEXT'. If the Filer E{x}tended Directory List command is used, the following information would be provided for this file:

```
SYSTEM.WRK.TEXT 4 27-Sep-82 255
text
```

The hexadecimal characters stored on disk to represent this entry are:

```
(file block addresses & file-type
identifier)
nul
FF 00 03 01 03 00
(file name)
S Y S T E M . W R K . T E X T nul
OF 53 59 53 54 45 4D 2E 57 52 4B 2E 54
45 58 54 00
(file creation date)
stx
02 B9 A5
```

## File Block Addresses and File Identification Byte

The first data items in a U.C.S.D. directory entry are the starting and ending block addresses for the file and the file-type byte. The ending block address is actually the address of the first block following the block(s) occupied by the file with which the ending address is associated in the directory.

A directory block address consists of a two-byte hexadecimal value representing the number of the block at which a file begins or ends. On the Apple diskette there is room for 280 file blocks. Since one byte can represent a maximum value of 255 decimal, when a block address of 256 or greater is reached, a '1' is added to the second byte of the value containing the block address and the left byte of the block address "wraps around" starting at x'00' again. For the example file, the block addresses would be translated as follows:

```
255 (starting address)
FF 00
259 (ending address)
03 01
```

Following the ending block address for the file is a file-type byte. The three file-type values I have been able to identify are:

```
x'02' = code file
x'03' = text file
x'05' = data file
```

**FILELIST**  
requires:  
Apple with Pascal

The file identification byte for a code file can be distinguished from the 'x'02' ('stx') character that sometimes precedes the date [see Locating the File Creation Date below] by the 'nul' character that always immediately follows the file identification byte.

### File Title

The next grouping of characters in a directory entry stores the file name. For the example file, the string of hexadecimal characters that represent the file title 'SYSTEM.WRK.TEXT' is:

```
S Y S T E M . W R K . T E X T nul
0F 53 59 53 54 45 4D 2E 57 52 4B 2E 54
45 58 54 00
```

Fifteen bytes are allocated for file title storage regardless of the actual title length. The file title itself is immediately preceded by a one-byte value giving the length, in characters, for the file name (x'0F' in the example). When a title is R(emove'd from a disk using the Filer R(emove command, this value is changed to a 'nul' character. [Unfortunately, restoring an accidentally removed file seems to require more than reinserting the proper file title length again.]

### Locating the File Creation Date

Following the fifteen bytes allocated to file title storage and preceding the date are two bytes whose exact use I was not able to determine. The directory entries for files generated by U.C.S.D. system software — e.g., the E(ditor, C(ompiler, Library etc. — appeared to have a 'nul' character after the file title followed by a 'stx'. (In the hexadecimal breakdowns for the example shown above, I grouped the 'nul' character with the file title.) The byte preceding the date in files generated by applications software using the system procedures REWRITE and CLOSE contained a 'soh' (x'01') character; however, dates for some system 'data' files were preceded by another 'nul' character. By looking for 'nul', 'soh', and 'stx' I was able to find the dates for all files on my Pascal diskettes using FILELIST.

### File Creation Date

The file creation date [day, month, and year] is the last item in the direc-

tory entry. An elegant scheme is used to pack all the date information into two bytes (one word). The two bytes containing the date for the above entry are B9 A5. The bit allocations for the date word are as follows:

```
dddd mmmm yyyy yydd
where: 'd' = day
       'm' = month
       'y' = year
```

Five bits are required for a range of values from 1 to 31 to represent the days of the month. In the U.C.S.D. date-word, however, these bits are not contiguous. The leftmost four bits help represent the day of the month, but the next four bits are used to represent the month. Storing a numerical equivalent for a month in the second four bits presents no difficulty; there are 16 possible values and only 12 months. So let's take a look at how the year is stored.

In any given century there are 0 to 99 years. If a value representing one of these years is doubled, it still fits nicely into the last eight bits; in fact, the rightmost bit will always be zero. This is precisely the way the year is stored.

Why? Because the right-most bit of the date word is used to help represent the day. For any day after the sixteenth of the month, a '1' is added to the byte containing the doubled value for the year. Thus, if the value contained in the rightmost eight bits is odd, 16 is added to the value contained in the leftmost four bits to derive a value for days in the last half of the month. The status of the rightmost bit is ignored when determining the value for the year stored in the other seven bits.

### Diskette Title, System Date, and Block Address Information

Information about an Apple Pascal diskette is located in the first 26 bytes of block two. The array locations given below assume that you have read block two into a PACKED ARRAY of type CHAR.

The field specifying the first block in which code, text, or data files can be stored begins in block array element three. Armed with this information, you can steal a couple of blocks from the directory if you need them, and if your directory does not need room for 77 files, of course.

#### Listing 1: FILELIST Program

```
{ $L #6: }
{ $C @ STEVEN LESH 1982 }
{ $S+ }
UNIT FILELIST;
INTRINSIC CODE 18 DATA 26;
INTERFACE
CONST
  ALLFILES=0;CODEFILE=2;TEXTFILE=3;DATAFILE=5;
  STARTDIR=2;ENDDIR=5;
VAR
  MONTH,DAY,YEAR:STRING;
  OUTPUTDEV:INTERACTIVE;
{ SUPPLY TWO 'CHARS' CONTAINING THE DATE IN SYSTEM FORMAT }
PROCEDURE READDATE(FIRSTDATECHAR,LASTDATECHAR:CHAR;
  VAR DAY,MONTH,YEAR:STRING);
{ CALL TITLEREAD DIRECTLY IF YOU KNOW: }
{ 1-THE DRIVE # FOR THE DIRECTORY TO BE READ }
{ 2-THE TYPE OF FILE FOR WHICH DIRECTORY }
{ ENTRIES ARE TO BE PRINTED }
{ **YOU CAN LIST ALL FILES IN THE ** }
{ ** WITH A FILETYPE OF '0' ** }
{ 3-THE OUTPUT DEVICE FOR A FILE LIST }
PROCEDURE TITLEREAD(DISKUNIT:INTEGER;
  FILETYPE:INTEGER;
  PRINTTITLE:BOOLEAN);
{ INITTITLEREAD ASKS THE USER: }
{ 1-SCREEN OR PRINTER OUTPUT FOR FILE TITLES LIST? }
{ 2-READ THE DIRECTORY FOR WHAT DISK DRIVE? }
{ 3-LIST TITLES FOR WHAT FILE TYPE (OR ALL FILES)? }
PROCEDURE INITTITLEREAD;
{ $P }
IMPLEMENTATION
VAR
  DISKNO,FILETYPE,PRINT:CHAR;
  DISKUNITS:SET OF CHAR;
  PRINTIT:BOOLEAN;
  NUMROFILES,FILECOUNT,VOLNO,FILEID:INTEGER;
PROCEDURE HALTDISPLAY;
```

(Continued on next page)



The eight-byte field allocated to the diskette title (or "volume name") starts in the seventh element of the character array with the first character specifying the length of the diskette title.

The field giving the total number of blocks available on an Apple Pascal diskette starts in the fifteenth element and the number of files currently in the directory is found in the seventeenth element of the character array into which block two is read.

The same format used for the file creation date associated with each entry in the directory is also used to store the current system date (i.e., the date associated with any newly written files). The current system date is stored starting in the twenty-first element of block two. The FILELIST procedure WRITESYS DATE should be called prior to creating new or updating existing disk files to set the current system date.

## Conclusion

With an understanding of the way file directories are stored on disk, a variety of procedures could be developed to give Language System applications software users more control over vital program disk files. Beyond merely emulating existing Fjiler program capabilities, new file maintenance capabilities could be developed: e.g., date-stamping compiled program listings, changing the date associated with existing directory entries and encoded prefixes and suffixes to allow longer, more meaningful file names.

It would be nice if Apple, Softech, or an ambitious reader would provide us with a 'fleshed out' library of units that emulated the capabilities of the Language System Fjiler program. Until this happens, however, we must fend for ourselves. I hope this article will be of some use to those of you seeking to add file maintenance capabilities to your U.C.S.D. applications software.

---

Steven Lesh has programmed telecommunications computer system software for the last eight years. Programming became a hobby when the first microcomputers were marketed, though he still programs an old UNIVAC 9300 to support his habit. You can reach Mr. Lesh at General Delivery, Sierra Vista, AZ 85616.

---

## Listing 1 (continued)

```

BEGIN
  WRITELN('PRESS 'C' TO CONTINUE..');
  REPEAT
    READ(KEYBOARD,PRINT)
  UNTIL PRINT='C';
END;
{ $P }
PROCEDURE READDATE;
TYPE
  { THESE SUBRANGES MUST BE ALLOWED TO ACCEPT '0' FOR }
  { INTERMEDIATE AND EXCEPTION PROCESSING }
  DAYS=0..31;
  MONTHMRS=0..12;
  YEARS=0..99;
VAR
  DAYNUM: DAYS;
  MONTHNUM: MONTHMRS;
  YEARNUM: YEARS;
  WORKAREA: INTEGER;
BEGIN
  WORKAREA:=ORD(FIRSTDATECHAR);
  MONTHNUM:=WORKAREA MOD 16;
  IF WORKAREA > 15 THEN DAYNUM:=WORKAREA DIV 16
    ELSE DAYNUM:=0;
  WORKAREA:=ORD(LASTDATECHAR);
  IF ODD(WORKAREA)=TRUE THEN DAYNUM:=DAYNUM + 16;
  YEARNUM:=WORKAREA DIV 2;
  CASE MONTHNUM OF
    1: MONTH:='JAN';
    2: MONTH:='FEB';
    3: MONTH:='MAR';
    4: MONTH:='APR';
    5: MONTH:='MAY';
    6: MONTH:='JUN';
    7: MONTH:='JUL';
    8: MONTH:='AUG';
    9: MONTH:='SEP';
    10: MONTH:='OCT';
    11: MONTH:='NOV';
    12: MONTH:='DEC';
  END; { CASE MONTHNUM }
  STR(DAYNUM, DAY);
  STR(YEARNUM, YEAR);
END;
{ $P }
PROCEDURE TITLEREAD;
CONST
  BLOCKSIZE=512;
  BOTTOMLINE=22;
  NUL=0;
  SOT=1;
  STX=2;
VAR
  DATECHECKED, DATEFOUND, FIRSTBLOCK, MIDFILE, MIDTITLE: BOOLEAN;
  PRINT: CHAR;
  BLOCKTEXT: PACKED ARRAY[0..BLOCKSIZE] OF CHAR;
  TITLELINE: PACKED ARRAY[0..15] OF CHAR;
  BLOCKINDEX, DIRBLOCKINDEX, LINECOUNT,
  PRINTINDEX, DATEFINDER, TITLEINDEX, TITLELENGTH: INTEGER;
  DISPLAY: STRING[8];
BEGIN
  IF PRINTTITLE=TRUE THEN DISPLAY:='PRINTER:'
    ELSE DISPLAY:='CONSOLE:';
  REWRITE(OUTPUTDEV, DISPLAY);
  DATECHECKED:=FALSE;
  FILECOUNT:=0;
  FIRSTBLOCK:=TRUE;
  LINECOUNT:=0;
  MIDFILE:=FALSE;
  MIDTITLE:=FALSE;
  FOR DIRBLOCKINDEX:= STARTDIR TO ENDDIR DO
    BEGIN
      UNITREAD(DISKUNIT, BLOCKTEXT, BLOCKSIZE, DIRBLOCKINDEX);
      IF FIRSTBLOCK=TRUE THEN
        BEGIN
          TITLELENGTH:=ORD(BLOCKTEXT[6]);
          BLOCKINDEX:=7;
          FOR TITLEINDEX:=1 TO TITLELENGTH DO
            BEGIN
              WRITE(OUTPUTDEV, BLOCKTEXT[BLOCKINDEX]);
              BLOCKINDEX:=BLOCKINDEX+1;
            END;
          WRITELN(OUTPUTDEV, ':');
          NUMROFILES:=ORD(BLOCKTEXT[16]);
        END;
    END;

```

(continued)

## Listing 1 (continued)

```

REPEAT { STEPPING THRU BLOCK }
  { FIND A FILE TITLE }
  WHILE (MIDFILE=FALSE) AND
    (BLOCKINDEX < BLOCKSIZE-2) AND
    NOT (BLOCKTEXT[BLOCKINDEX] IN
      [CHR(CODEFILE),CHR(TEXTFILE),CHR(DATAFILE)])
    DO BLOCKINDEX:=BLOCKINDEX+1;
  IF (MIDFILE=FALSE) AND
    (BLOCKINDEX < BLOCKSIZE-2) AND
    (BLOCKTEXT[BLOCKINDEX+1] = CHR(NUL)) THEN
    BEGIN
      { GET CHARACTER FOR TITLE LENGTH }
      TITLELENGTH:=ORD(BLOCKTEXT[BLOCKINDEX+2]);
      IF (TITLELENGTH > 0) AND
        (TITLELENGTH < 16) THEN FILECOUNT:=FILECOUNT+1;
      { IF FILE TITLE FOUND SET UP TO GET CHARACTERS }
      IF ((BLOCKTEXT[BLOCKINDEX] = CHR(FILETYPE)) OR
        (FILETYPE=ALLFILES)) THEN
        BEGIN
          IF (FIRSTBLOCK=FALSE) OR
            { THE NEXT CHECK PREVENTS A LOW BLOCK ADDRESS }
            { —FOR THE FIRST DIRECTORY ENTRY ONLY— }
            { FROM BEING MISTAKEN FOR A FILETYPE BYTE }
            { >THIS IS NOT NORMALLY A PROBLEM FOR THE < }
            { >THIS IS NOT NORMALLY A PROBLEM FOR THE < }
            { >STANDARD PASCAL FILE TYPES UNLESS YOU < }
            { >REDUCE THE NUMBER OF BLOCKS ALLOCATED TO < }
            { >THE DIRECTORY OR USE THIS CODE WITH OTHER < }
            { >PASCAL-BASED LANGUAGES (E.G. PILOT) < }
            ((FIRSTBLOCK=TRUE) AND (BLOCKINDEX > 29)) THEN
            BEGIN
              MIDTITLE:=TRUE;
              TITLEINDEX:=0;
              MIDFILE:=TRUE;
              BLOCKINDEX:=BLOCKINDEX+3;
            END;
          END;
        END;
      { GET FILE NAME FOR DISPLAY }
      WHILE (BLOCKINDEX < BLOCKSIZE-1) AND
        (MIDTITLE=TRUE) DO
        BEGIN
          REPEAT
            TITLELINE[TITLEINDEX]:=BLOCKTEXT[BLOCKINDEX];
            BLOCKINDEX:=BLOCKINDEX+1;
            TITLEINDEX:=TITLEINDEX+1
          UNTIL (TITLEINDEX=TITLELENGTH) OR
            (BLOCKINDEX=BLOCKSIZE);
          { SEE IF ANOTHER 'BLOCKREAD' REQD TO FINISH TITLE }
          IF TITLEINDEX = TITLELENGTH THEN
            BEGIN
              MIDTITLE:=FALSE;
              { POSITION TO END OF TITLE SPACE FOR SHORT TITLES }
              IF TITLEINDEX < 15 THEN
                BEGIN
                  DATEFINDER:=15 - TITLELENGTH;
                  BLOCKINDEX:=BLOCKINDEX + DATEFINDER;
                  { DO THIS FOR SHORT TITLES ENDING ON A BLK BNDRY WITH }
                  { UNUSED CHARS BEFORE THE DATE IN THE NEXT BLOCK }
                  IF BLOCKINDEX > (BLOCKSIZE-2) THEN
                    DATEFINDER:=BLOCKINDEX-BLOCKSIZE;
                END;
              { SET INDEX TO WHERE DATE 'STX' SHOULD BE }
              BLOCKINDEX:=BLOCKINDEX + 1;
            END;
          END;
        END;
      { FIND THE FILE CREATION DATE }
      WHILE (MIDFILE=TRUE) AND
        (BLOCKINDEX < BLOCKSIZE - 1) AND
        (DATECHECKED=FALSE) DO
        BEGIN
          DATEFOUND:=FALSE;
          { FOR TITLES WHICH END ON A BLOCK BOUNDARY }
          IF BLOCKINDEX=0 THEN BLOCKINDEX:=DATEFINDER+1;
          IF (BLOCKTEXT[BLOCKINDEX] IN
            [CHR(STX),CHR(SOT),CHR(NUL)]) THEN DATEFOUND:=TRUE
          ELSE
            REPEAT
              BLOCKINDEX:=BLOCKINDEX+1;
              UNTIL (BLOCKTEXT[BLOCKINDEX] IN [CHR(NUL),CHR(STX)]);
          IF (BLOCKTEXT[BLOCKINDEX] = CHR(STX)) THEN DATEFOUND:=TRUE;
          DATECHECKED:=TRUE;
        END;
      { DISPLAY A TITLE }
      IF (TITLEINDEX > 0) AND (DATECHECKED=TRUE) THEN
        BEGIN
          { PRINT FILE NAME }

```

(continued)

```

FOR PRINTINDEX:=0 TO TITLELENGTH-1 DO
  WRITE(OUTPUTDEV,TITLELINE[PRINTINDEX]);
  { TAB TO DATE-WRITE AREA }
  FOR PRINTINDEX:=0 TO 17-TITLELENGTH DO
    WRITE(OUTPUTDEV,' ');
  { CONVERT DATE FOR DISPLAY }
  IF DATEFOUND = TRUE THEN
    BEGIN
      READDATE(BLOCKTEXT[BLOCKINDEX+1],BLOCKTEXT[BLOCKINDEX+2],
        DAY,MONTH,YEAR);
      WRITE(OUTPUTDEV,DAY:2,'-',MONTH,'-',YEAR);
    END
    ELSE WRITE(OUTPUTDEV,'CAN'T FIND DATE');
  WRITELN(OUTPUTDEV,);
  LINECOUNT:=LINECOUNT+1;
  DATECHECKED:=FALSE;
  MIDFILE:=FALSE;
  IF (LINECOUNT=BOTTOMLINE) AND (PRINTTITLE=FALSE) THEN
    BEGIN
      HALTDISPLAY;
      LINECOUNT:=0;
    END;
  END;
  { BUMP TO THE NEXT CHARACTER FOR CHECKS }
  IF MIDFILE=FALSE THEN BLOCKINDEX:=BLOCKINDEX+1;
  [ IF WE HAVE PROCESSED ALL FILE TITLES ON THE ]
  [ DISK EXIT W.O. READING ALL DIRECTORY BLOCKS ]
  IF FILECOUNT > (NUMROFILES-1) THEN
    BEGIN
      HALTDISPLAY;
      CLOSE(OUTPUTDEV,NORMAL);
      EXIT(TITLEREAD);
    END;
  { END REPEAT BLOCK STEPPING }
  UNTIL BLOCKINDEX > BLOCKSIZE -1;
  FIRSTBLOCK:=FALSE;
END; { FOR DIRBLOCKINDEX:= STARTDIR TO ENDDIR }
CLOSE(OUTPUTDEV,NORMAL);
{ ALLOW TIME TO READ LAST SCREEN }
HALTDISPLAY;
END;
PROCEDURE INITTITLEREAD;
BEGIN
  REPEAT
    DISKUNITS:=[ '1'..'6' ];
    PAGE(INPUT);
    REPEAT
      WRITELN('TYPE 'P' FOR HARDCOPY;');
      WRITELN('S' FOR SCREEN OUTPUT..');
      READ(KEYBOARD,PRINT)
    UNTIL PRINT IN ['P','S'];
    IF PRINT='P' THEN PRINTIT:=TRUE
    ELSE PRINTIT:=FALSE;
    REPEAT
      WRITELN('LIST TEXT FILE DIRECTORY FOR WHICH DISK?');
      WRITELN('**TYPE 1-6..');
      READ(KEYBOARD,DISKNO)
    UNTIL DISKNO IN DISKUNITS;
    CASE DISKNO OF
      '1':VOLNO:=4;
      '2':VOLNO:=5;
      '3':VOLNO:=9;
      '4':VOLNO:=10;
      '5':VOLNO:=11;
      '6':VOLNO:=12;
    END { CASE DISKNO };
    REPEAT
      WRITELN('ENTER FILE TYPE..');
      WRITELN(' 0 -> ALL FILE TYPES');
      WRITELN(' 2 -> CODE FILES');
      WRITELN(' 3 -> TEXT FILES');
      WRITELN(' 5 -> DATA FILES');
      WRITELN(' 9 -> **QUIT**');
      READ(KEYBOARD,FILETYPE);
    UNTIL FILETYPE IN ['0','2','3','5','9'];
    CASE FILETYPE OF
      '0':FILEID:=0;
      '2':FILEID:=2;
      '3':FILEID:=3;
      '5':FILEID:=5;
      '9':FILEID:=9;
    END { CASE FILETYPE };
    IF FILEID < 6 THEN TITLEREAD(VOLNO,FILEID,PRINTIT);
  UNTIL FILEID=9;
END;
END;
BEGIN
END.

```

MICRO



# COMPU SENSE

C-64	<b>Compute</b>	\$399.00
VIC-20®	<b>Personal Computer</b>	147.00
VIC-1515	<b>Printer</b>	334.95
VIC-1530	<b>Datasette</b>	67.50
VIC-1541	<b>Disk Drive</b>	347.00
VIC-1010	<b>Expansion Module</b>	139.95
VIC-1311	<b>Joystick</b>	9.95
VIC-1312	<b>Game Paddles</b>	19.95
	<b>Telephone Modem</b>	99.95
VIC-1210	<b>VIC 3K Memory Expander Cart.</b>	34.95
Plugs directly into the VIC's expansion port. Expands to 8K RAM total.		
VIC-1110	<b>VIC 8K Memory Expander Cart.</b>	52.50
8K RAM expansion cartridge plugs directly into the VIC.		
CM102	<b>24K Memory Expander Cart.</b>	119.95
VIC-1011A	<b>RS232C Terminal Interface</b>	39.95
Provides interface between the VIC-20 and RS232 telecommunications modems. Connects to VIC's user port.		
<b>PETSPEED</b> - Basic Compiler for Commodore		140.00
Compile any Pet Basic program. The only optimizing compiler. Programs compiled with Petspeed run up to 40 times faster. Petspeed code is unlistable and compiled programs cannot be tampered with. No security device required for compiled programs. Available NOW for the Commodore 64.		
	<b>Star Gemini 10 Printer</b>	360.00
	<b>Star Gemini 15 Printer</b>	450.00
	<b>SND Monitor</b>	347.00

CS1	<b>QUICK BROWN FOX</b>	\$55.00
The Word Processor of this decade! For the VIC-20 and C-64.		

## COMMODORE SOFTWARE

VIC-1211A	<b>VIC-20 Super Expander</b>	\$55.00
Everything Commodore could pack into one cartridge - 3K RAM memory expansion, high resolution graphics plotting, color, paint and sound commands. Graphic, text, multicolor and music modes. 1024x1024 dot screen plotting. All commands may be typed as new BASIC commands or accessed by hitting one of the VIC's special function keys. Includes tutorial instruction book. Excellent for all programming levels.		
VIC-1212	<b>Programmer's Aid Cartridge</b>	\$45.99
More than 20 new BASIC commands help new and experienced programmers renumber, trace and edit BASIC programs. Trace any program line-by-line as it executes, pause to edit. Special KEY command lets programmers redefine function keys as BASIC commands, subroutines or new commands.		
VIC-1213	<b>VICMON Machine Language Monitor</b>	\$48.99
Helps machine code programmers write fast, efficient 6502 assembly language programs. Includes one line assembler/disassembler.		

## CARDCO

<b>Atari Adapter</b> - play your 2600 games on the VIC-20	\$79.95
<b>CARDBOARD 6</b>	\$87.50
An expansion interface for the VIC-20. Allows expansion to 40K or accepts up to six games. May be daisy-chained for more versatility.	
<b>CARDBOARD 3</b>	\$35.95
Economy expansion interface for the Vic-20.	
<b>CARD "2" CARD/PRINT</b>	\$76.00
Universal Centronics Parallel Printer Interface for the VIC-20 or CBM-64. Use an Epson MX-80 or OKIDATA or TANDY or just about any other.	
<b>CARDETTE</b>	\$30.95
Use any standard cassette player/recorder with your VIC-20 or CBM-64.	
<b>LIGHT PEN</b>	\$29.95
A light pen with six good programs to use with your VIC-20 or CBM-64.	
<b>16K Memory Expander</b>	\$50.50

All CARDCO Products have a lifetime warranty.

## BUSINESS USES FOR YOUR VIC-20®

SS	<b>Accounts Payable &amp; Receivable</b>	\$29.95
CW-107A	<b>Home Calculation Program Pack</b>	48.95
CPV-31	<b>Data Files</b> - your storage is unlimited	14.95
CPV-96	<b>Household Finance Package</b> - to keep records of all your household expenses	30.95
CPV-208	<b>Bar-Chart</b> - display your numerical data	8.95
CH	<b>Turtle Graphics</b> - learn programming	34.95
CH	<b>VIC Forth</b> - a powerful language for BASIC programming	49.95
CH	<b>HES MON</b> - a 6502 machine language monitor with a mini-assembler	34.95
CH	<b>HES Writer</b> - time-saving word process tool	34.95
CH	<b>Encoder</b> - keep your personal records away from prying eyes	34.95
CT-21	<b>Statistics Sadistics</b> - statistical analysis	14.95
CT-121	<b>Total Time Manager 2.0</b> - creates personal or business schedules	15.95
CT-124	<b>Totl Label</b> - a mailing list & label program	13.95
CT-125	<b>Totl Text BASIC</b>	15.95
CT-126	<b>Research Assistant</b> - keep track of data	17.50
CT-140	<b>Totl Text Enhanced</b>	29.95
CM-152	<b>Grafix Designer</b> - design graphic characters	12.95
CQ-5	<b>Minimon</b> - allows you to program, load, save, or execute machine language programs	13.95
CS	<b>Home Inventory</b> - lists your belongings	17.95
CS	<b>Check Minder</b> - keep your checkbook right	14.95
CS	<b>General Ledger</b> - a complete ledger	19.95

## GAMES FOR YOUR VIC-20®

CH-G203	<b>Tank Wars</b>	\$15.95
CH-G205	<b>Pinball</b>	13.45
CH-G206	<b>Simon</b> - It gets tougher as you get better. Great for kids of all ages.	13.45
CH-G207	<b>Fuel Pirates</b>	13.45
CH-G209	<b>Laser Blitz</b>	15.95
CH-G210	<b>Tank Trap</b>	15.95
CH-G211	<b>Concentration</b>	13.45
CH-G212	<b>Dam Bomber</b> - pilot the plane, avoid enemy	13.45
CH-C307	<b>Shamus</b> - search room after room for the shadow-eluding androids; 2 levels of intense arcade action	34.95
CH-C308	<b>Protector</b>	36.95
CPU-79	<b>Breakout</b>	7.95
CPU-85	<b>Hangman</b> - unbelievable graphics & sound	9.95
CPU-87	<b>Memory</b> - VIC challenges your memory	9.95
CPU-88	<b>Match</b> - hand & eye coordination	7.95
CPU-89	<b>Monks</b> - a devilish game of logic	7.95
CPU-108	<b>Bomber</b> - you must decide who you want to fly for, then pick a target & your experience level	9.95
CPU-109	<b>Amok</b> - the halls of Amok are populated by robots that obey one command - get the intruder!	20.95
CPU-153	<b>Tank vs. UFO</b> - the tank is moving back & forth along the base; shoot the UFO before it shoots you	9.95
CPU-194	<b>Snakman</b> - Pacman for the VIC	14.95
	<b>Defender on Trl</b> - you're the pilot of an experimental ship	17.95
	<b>3-D Man</b> - the popular arcade game, requires 3K	17.95
	<b>Exterminator</b> - a game full of bugs	20.95

We have over 400 programs for your VIC-20 and over 250 programs for your C-64!

### Shipping & Handling Charges:

First two (2) items - \$2.00 per item.  
 Three (3) or more items - \$1.00 per item.  
 For orders over \$100 total, surface shipping will be paid by CompuSense. Blue Label or special handling will be paid by the customer.  
 Additional \$2.00 C.O.D. fee on all C.O.D. orders.  
 MasterCard and Visa accepted. Give card number and expiration date on order form.  
 Allow three (3) weeks for personal checks.

TO ORDER:  
 P.O. Box 18765  
 Wichita, KS 67218  
 (316) 263-1095




Prices subject to change.

VIC-20® is a registered trademark of Commodore

Write for  
**FREE**  
 Catalog!

Circle No. 24



When something new comes along most of us tend to be conservative about giving up the familiar. A good example of this behavior is the use of structured programming languages on microcomputers. Languages like Pascal have been available to us for a couple of years; they are easier to program in and more efficient than BASIC. However, only a relative minority of microcomputer users have switched to a structured language, and none of the major manufacturers offer anything other than BASIC as standard equipment.

Recently a number of new operating systems have come on the market. These operating systems bear about the

There are different types of tree structures used in structured programming and as data structures. I will restrict my discussion to one particular type: the hierarchical structure. In this structure the root node is called the ancestor of all other nodes. The next lower level of nodes are the children of the root node, each of which may have children of its own. As you work down the tree, each level of nodes represents a new generation of children. Each node has only one parent node, but it may have any number of child nodes. A path from the root node to any other node in the structure is simply a list of descendants, starting with the root

BASIC-09 needed an equally well-structured operating system to support it, developed OS-9 to allow BASIC-09 users realize the full potential of a modern programming language.

I feel OS-9 is the best of the new operating systems. It is one of the most powerful 8-bit operating systems available today and is the only truly powerful operating system that can run on a relatively small system. A 24K-byte system can support OS9, and 48K system can run several users simultaneously in a high-level language. A fully extended OS-9 system can have 1 megabyte of main memory, hard disk drives, and many users.

# OS - 9

## a structured operating system

by Mark G. Boyd

same relationship to the currently dominant systems [CP/M, Apple DOS, Flex] as Pascal does to BASIC. They are more powerful and, usually, easier to use.

Structured operating systems have the same type of structure found in a structured program, looking like an upside-down tree. The highest level is called the root node and is the overall control structure and most abstract part of the system. The root node is connected to the highest level of branch nodes, each of which are connected to their own set of branch nodes on the next lower level. On any level, a node may not be connected to any lower-level nodes. This type of node is called a leaf node and is connected only to a single branch node on the next higher level. In a structured program the leaf nodes are the most detailed part of the program. In a structured operating system they are the I/O device drivers, the data files, and the lowest level routines in the programs.

node and ending with the desired node. The path from the root node to any other node is unique. Any node may be reached from any other node by working up the structure until a common ancestor node is found and then working down to the desired node.

Data flow in a hierarchical structure is allowed only along the paths connecting the nodes. All data is local to the procedures/files that are the nodes. Data may be passed from a parent to its child or from a child to its parent; it cannot be passed to any other node without working through a path that involves a common ancestor. This system sounds complex but, as you shall see, it is the basis for very simple, but powerful operating systems.

OS-9, which uses this hierarchical structure and is a by-product of BASIC-09, is a result of Motorola's 6809 development process. The software was developed simultaneously with the hardware it is designed to use. Motorola and Microware, realizing that

### A Structured Operating System

OS-9 is a descendant of UNIX, the Bell Telephone Laboratories operating system for large minicomputer systems. UNIX has become the standard for multiprogramming minicomputer systems because of its versatility, power, and elegantly simple design. OS-9 looks much like UNIX, but its actual operation is quite different. UNIX dynamically swaps programs into memory from large, fast disk systems. OS-9 cannot do this because of the slow disk systems used with microcomputers. In order to support multiple users, OS-9 makes use of position-independent re-entrant programs in RAM or ROM. Because the programs are re-entrant, multiple users can use the same code while maintaining different data and stack areas, and because the code is position independent, it can be brought into memory, in any available location, as needed. These two factors allow OS-9 to be

much more efficient in its use of RAM and ROM than UNIX.

Multiprogramming means that the system can execute many different programs simultaneously. CPU time is divided in time slices (about .1 seconds in OS-9), which are allocated by the system to the various tasks currently running and to the operating system overhead. With a powerful micro-processor like the 6809 and a well-designed multiprogramming operating system like OS-9, users are not aware that they have only part of the CPU time.

OS-9 can run processes sequentially or concurrently. Each process is created by an existing process and may in turn create child processes of its own. This leads to a hierarchical structure where all processes are descendants of the original process run when OS-9 was brought up. To the user the root of each tree of processes is a process called Shell. A Shell process is executed when the system is started, and a new incarnation of Shell is created for each user who logs onto the system. Shell is a command interpreter that accepts input from the user and creates new processes in response to that input. Shell also can pass parameters to the process it creates.

When a Shell creates a process it puts itself into a waiting state until that process is finished. The user has the option of causing the Shell to create another incarnation of itself before it goes into its waiting state. This new Shell then can be used to create a new process and another incarnation of Shell, allowing a single user to make effective use of OS-9's multiprogramming capabilities. I'll give an example of this at the end of the article.

A hierarchical system also is used for all input and output. The top level (or root) of this tree is a general I/O manager. At this level all data is essentially a stream of bytes. Data being sent out to an external device passes down through the tree to a device driver, which is a leaf node (for single file devices) or the root node of the device file structure (for disk drives). The characteristics required for the data actually sent to the device are added as it passes down the tree. For example, data going to the disk would be blocked to sector size at one level, the appropriate preamble and postamble added at another level, and the actual sectors to be written determined at yet another

level. Input data undergoes the reverse of this process as it passes up the tree. Data at the top, which is the data passed to or from a process, has the same structure regardless of its course or its destination.

The device independence of I/O data has two advantages. First, it means that I/O paths can be redirected at any time. A program that normally outputs to the printer can have its output redirected to a disk file for later printing. Input to the Shell can be redirected to allow a disk file to control the system. In other words, printer spooling and procedure files are inherent in OS-9. Second, OS-9 programs are essentially hardware independent. The program is not aware of the device driver modules, so it cannot depend on the details of the I/O hardware. A program that runs on a small OS-9 system with one minifloppy and a serial printer will run, without modification, on a large system with hard disks and a chain printer. No more problems with software transportability or system upgrades!

The hierarchical structure extends to the file structure on the disk drive(s). A file is accessed by specifying a path to it. This path is simply a list of all of its direct ancestors. Each entry in the list, except for the first and last, is a directory file. Directory files are the branch nodes of the tree structure and contain only the names of their immediate descendants and pointers to them. The leaf nodes of the tree are the actual data or program files. The first entry in the path list may be a device driver (e.g., /D1) or it may be a directory file in the current directory. The last entry is the name of the desired file. If the desired file is in the current directory, only the last entry is required.

Finally, let's explore some Shell commands. These commands are entered in response to the prompt OS9 and consist of a process name that may be followed by parameters for the process, a parameter that modifies the amount of memory used by the process, parameters that redirect the input/output paths of the process, and finally by a parameter that results in concurrent processing (i.e., creates a new incarnation of Shell). The parameters are separated by spaces and the entry is terminated by a return. Some examples are:

1. OS9: LIST FILE 7
2. OS9: COPY FILE3 FILE7

3. OS9: LIST /D1/ASSM-FILES/BPROM
4. OS9: LIST /D0/MARK-LIB/LETTER >/P1
5. OS9: LIST FILE7>/P1 & EXECUTE #7K

The first example runs the process LIST with input from FILE7, which lists FILE7 to the terminal. The second example runs the process COPY with input from FILE3 and output to FILE7. So far things are much the same as in any DOS.

The third example runs the process LIST. Input is from the file BPROM. The path list specifies that BPROM is listed in the directory file ASSM-FILES, which itself is listed in the primary directory for the disk mounted in drive D1. The fourth example is similar to the third but it also demonstrates output redirection (>) to the serial printer driver /P1. This process lists the file LETTER to the serial printer.

The fifth example introduces concurrent execution (&). The Shell creates a process that starts listing FILE7 to the printer. Then it creates another Shell that starts the process EXECUTE (EXECUTE is allocated 7K of RAM (#7K). All processes have a certain minimum amount of RAM that they require. This information is stored on the disk with each process. The #7K is an execution modifier that can be used to allocate larger amounts of RAM at the time the process is created.

On my system EXECUTE is a BASIC-09 program. This information is noted by the system and, when a process using EXECUTE is created, BASIC-09 is loaded automatically and instructed to run the process. EXECUTE must be in packed form and located in the CMDS directory, but that's a subject for another article.

## References

1. *OS-9 Level I Operating System V1.1 Users Guide*, Microwave Systems Corporation, 1981.
2. *OS-9 Level I Operating System V1.1 System Programmer's Manual*, Microwave Systems Corporation, 1981.

---

Dr. Boyd teaches chemistry, physics, and computer science at a small liberal arts college. He may be contacted at St. Mary of the Plains College, Dodge City, KS 67801.

---

# COLOR Disk

## BASIC:

### observations and utilities

By Michael Dudgeon and William Clements, Jr.

The disk system for the Color Computer (CoCo) has been available for over a year now and has proved to be quite popular with CoCo owners. The DOS is ready to go at power-up, doesn't tie up a disk drive in reading program overlays, and since it is in ROM, it can't be overwritten by some renegade program. Best of all, it is easy to use; the commands are simple and direct, with many being easily understood by a complete novice.

In the year that we've used the CoCo DOS, we have discovered a few things that aren't specifically documented by Radio Shack, and have written some utility programs that we'd like to pass along to other disk users. We'll also discuss the structural details of BASIC and machine-language program files on disk. With this information, you can create new files, or modify old ones, directly from the keyboard. You can scroll through a file, or even through an entire disk, and explore the contents on the disk. You can back up the directories on all your disks, using sectors that are "hidden" from the operating system, as a safeguard against directory crashes that can help in recovering accidentally KILLED files. You can list to the screen a complete summary of granules and sectors that a file occupies, and you can change individual bytes within a file without rewriting the whole file. Finally, we'll give you a program that lets you print a disk directory in a compact file-list table, including the start, end,

and exec addresses for machine-language files, appropriate for taping onto the disk jacket.

#### Disk Format and File Structure

There are three separate parts to a program file: the directory entry, the file-allocation table entries, and the file data. The disk is formatted into 35 tracks, with eighteen 256-byte sectors per track. The directory is contained on sectors 3-11 of track 17, and the file-allocation table is on sector 2 of the same track. Sectors 1 and 12-18 of track 17 are not used by the DOS.

Each track is divided into two 4096 byte granules, sectors 1-9 comprising one granule and sectors 10-18 the other. The granules are numbered 0 (track 0, sectors 1-9) through 31 (track 16, sectors 10-18), and 32 (track 18, sectors 1-9) through 67 (track 34, sectors 10-18), skipping the directory track. The directory is located in the middle of the disk to minimize head travel; the directory must always be accessed first when program file operations are carried out by BASIC, and then the sectors containing the actual file are read.

#### The Directory Format

The directory structure is completely documented on pages 58-59 of the Disk System Owner's Manual and Programming Guide, so we won't repeat every detail here. The directory entries

are contained in the first 16 bytes of each 32-byte cluster — beginning in sector 3 of track 17 and stored in the same order that the files were originally created on the disk. Each entry contains file name and extension, a file-type flag, a binary/ASCII flag, the number of the first granule in the file, and the number of bytes used in the last sector of the file.

Sector 2 of the directory track is the file-allocation table, which uses bytes 0-67. Each byte indicates the type of use being made of the granule having the same number as the byte. A value \$FF means that granule is not part of a file. A value in the range \$0-\$43 (0-67 base ten) means that granule is part of a file; the value contained there is the number of the next granule used by the file. A value in the range \$C0-\$C9 means the corresponding granule is the last one used by that file. The second hex digit (0-9) is the number of sectors in the granule that the file uses, counting from the first sector in the granule. Note that the four lowest order bits (bits 0-3) in the word therefore give the number of sectors, rather than bits 0-5 as the manual says. Table entries in the range \$0-\$43 and \$C0-\$C9 form a linked list of the granule allocations to every file.

When a file is killed, the first character of the file name is set to \$FF, and the entries in the allocation table that correspond to the granules containing the file are also set to \$FF. This destroys all information explaining where a file was stored. The file itself is left unchanged and will be overwritten by new data if the sectors are re-used. The FREE function of BASIC reports the number of table entries in the allocation table that currently equal \$FF.

#### How Program Files Are Stored

Let's look at how a BASIC program is stored in RAM, as a binary file on disk, and as an ASCII disk file. For our example, we'll choose a simple two-line program:

```
10 INPUT A
20 PRINT A;SQR(A);GO TO 10
```

BASIC stores its program lines in tokenized form, replacing all commands and functions with a one-byte code as the lines are entered. The interpretation of lines thus starts even before a program is run, saving some execution time and using less memory.

While listing or editing the lines, the tokenizing process is reversed to recover the original text. The pointer to the first BASIC statement is in locations \$19 and \$1A (25 and 26 decimal), and the address of the first free location after the last line is in locations \$1B and \$1C (26 and 27 decimal).

If we enter the example program with the disk system installed and peek at locations 25-27, we find \$2601 and \$2620. Peeking at memory in between these limits gives the tokenized BASIC program in Table 1.

Now let's see how this list of bytes looks on disk. Let's take a freshly initialized disk and save the program under the name "TEST.BAS", which records it in binary (tokenized) format. The directory information and the sector containing the program statements can easily be examined using the DISKLOOK program, which we'll describe later. The information found there is summarized in Table 2. The first sector of the file begins with a one byte beginning-of-file mark (\$FF) and two bytes containing the total number of bytes in the file. Then the tokenized BASIC statements are copied verbatim from RAM, complete with the address links and zero markers between lines, filling sector after sector and granule after granule as required to hold the entire program.

Table 3 shows the file contents if the program is stored in ASCII format using SAVE "TEST.BAS",A. The tokenized lines in memory are untokenized and converted back to the way they were originally typed in, except for question marks that share the same token as PRINT and thus appear as PRINT in a listing. The file contains the list of program lines with the marker-byte \$0D before and after every line.

BASIC uses a slightly different format to store machine-language programs, since several absolute addresses must be associated with each file. Table 4 gives a six-byte test program and shows how it is stored. Notice that the end address is not stored with the file; the start address and total number of program bytes are saved at the front of the program, and the execute address appears at the end.

### Saving Disk Programs On Cassette

While we're talking about storage of Disk BASIC programs, here is a word of caution about the cassette storage of

TABLE 1. RAM STORAGE OF BASIC TOKENIZED LINES

The pointer to the first location used for the lines is in locations \$19-\$1A. The lines are stored in the following format: two-byte address of next BASIC line, two-byte line number, the BASIC tokenized line, and a one-byte end-of-line marker (\$00).

Example: 10 INPUT A  
20 PRINT A, SQR(a) : GO TO 10

We find that \$19-\$1A contains \$2601. At \$2601, we find the following data:

Hex Loc.	Hex Byte	Comments	Hex Loc.	Hex Byte	Comments
\$2601	26	Next line	\$2610	3B	:
	09	at \$2609		FF	Function flag
	00			9B	SQR token
	0A	Line #10		28	
	89	INPUT token		41	A
	20	Space		29	
	41	A		3A	:
	00	End-line marker		81	Token for GO
\$2609	26	Another line		20	Space
	1E	would go here		A5	Token for TO
	00			20	Space
	14	Line #20		31	
	87	PRINT token		30	0
	20	Space		00	End-line marker
	41	A			

disk programs. When the computer is powered up, the initialization routines put a table of pointers to the BASIC functions and commands into lower RAM starting at \$0120. If you have the Extended BASIC ROM, the pointers to those additional keywords are added to the table, and if the disk system is plugged in, pointers to the disk command and function lists are appended. Be sure the disk controller pack is plugged in if you save a program containing Disk BASIC statements onto cassette tape! Likewise, the disk pack must be in place whenever you read that tape back in. Otherwise, the table of pointers to legal keywords won't contain the ones for Disk BASIC. When you try to list a program containing unrecognizable tokens, BASIC goes ahead with the list but prints an exclamation point in place of the offending tokens as a signal that it couldn't figure out what keyword to put there.

Suppose, for instance, you want a printed listing of a Disk BASIC program but have no printer. You save the program on cassette and take it to a friend who has a printer but no disks. When he reads it in and lists it, he'll get "!" signs for all the disk-system keywords: you can see those now and then in published listings of programs for the disk system. If you use a cassette tape to hold Extended Disk BASIC programs, take your disk controller pack along with the tape; the ribbon cable and drives aren't needed if you just want a listing, but the Disk

ROM must be there before a CoCo can understand your tape!

### Some Utility Programs For the Disk User

Now that we know the exact form in which the disk system stores programs, we can go in directly and alter the directory, fix a bad byte in the middle of a program, or construct our own files by POKEing in directory entries and file sectors directly from a program. We could even convert a BASIC program file into a machine-language file, and *vice versa*, by properly modifying the directory entry and changing the marker bytes at the beginning and end of the file. Many of these tricks are useful if you need to salvage a damaged file or a miswritten directory. The latter conversion might be helpful in overlaying or chaining program segments that have conflicting numbers by reading a BASIC file into a section of unused RAM and POKEing new line numbers into the statements. Then, by using a machine-language merge and move routine, you can combine them with the original program. Or you can just use the programs as an aid in learning about how Disk BASIC works.

1. The DISKLOOK Program. Listing 1 presents a multipurpose utility for examining and changing all kinds of files, including the directory itself. The program begins in the "disklook" mode, requesting a granule number and a sector number. When that information is



provided, the program reads the sector into memory. Beginning with the first byte in the sector and continuing until the screen is full, it prints the byte count, the hex value of the byte and its ASCII character equivalent. To continue scrolling through the contents of the sector, press the space bar or 'enter'. To reverse-scroll, hit the up-arrow; to interrupt the scrolling and specify another granule and sector, press '@'. If you wish to look at the directory, enter 'D' instead of a granule number. The byte count starts at 0 when the directory is read out, to correspond with the listings in the Disk System Manual and to allow the byte numbers in the allocation table to correspond with the granule numbers. For all other granules, the bytes are numbered starting with 1.

You may also enter a subcommand mode whenever the screen stops scrolling. A 'D' key initiates a search through the directory sectors for the first unused position. Then you are prompted for the information needed to create a new directory entry (you must use as the extension either .BAS, .BIN, or .TXT). A 'C' allows you to change one byte in the sector under examination by specifying the byte number and the new value. An 'F' (for file-analysis) prompts for a file name, then lists all information contained in the directory about that file, including file type and mode, an ordered list of the granules used, the number of sectors in the last granule, and the number of bytes in the last sector.

2. The DIRDUPL Program. If you read the Disk System Manual carefully, you'll see that BASIC leaves nearly half the directory track unused. Sectors 1 and 12-18 can be used for other purposes, such as scratch storage or private files. We use them to back up the information contained in the directory. Most disk users at one time or another have gotten a mangled directory due to power failure, a power-line spike, or other mishap that occurs just as you are writing the disk. Another cause of crashed disks is the corrosion that forms on the contact fingers of the disk drive, causing intermittent connections.

You can use DIRDUPL to back up directory sectors 2-9 into sectors 12-18 and 1, respectively, and then later to rewrite the directory from the backup if it ever becomes necessary. Sectors 10 and 11 are not backed up due to lack of space; however, these are not normally

used unless you have more than 54 files on one disk.

By the way, DIRDUPL can provide an easy way to restore a killed file. The KILL command doesn't alter the file, it just flags the directory entry and wipes out that file's granule numbers in the file-allocation table so they all can be used again. If you kill a file and want to recover it later, you can do so by restoring the original directory provided that none of the file's granules have been reused. Of course, if the file space has been overwritten, the original file is unrecoverable by any method.

3. The DISKLIST Program. Several programs have been published that give

a printed listing of the names/extensions, length, type, addresses, and other statistics associated with the files on a disk. The most elaborate file statistics we've seen are those generated by F. S. Flack's program in *Color Computer News*, August, 1982, p. 11. Another program giving less detail but an easier-to-read listing is C. J. Roslund's program in *The Rainbow*, March, 1982, p. 31. Other programs have appeared that send the output of the DIR command to a printer. We wanted a program that would provide more information than the DIR command, yet would not use an entire printed page so that the user is forced to

**TABLE 2. DISK STORAGE OF BASIC PROGRAM IN BINARY FORMAT**

If the program of Table 1 is saved to disk, the sector containing the program will have the following bytes:

Byte No.	Byte	Comments	Byte No.	Byte	Comments
1	FF	Start marker	10	87	PRINT
2	00	Total length	11	20	
3	1F	of file	12	41	A
4	26	Address of	13	3B	;
5	09	next line	14	FF	
6	00	Line #10	15	9B	SQR
7	0A		16	28	
8	89	INPUT	17	41	A
9	20		18	29	
A	41	A	19	3A	:
B	00	End-line marker	1A	81	GO
C	26	Where another	1B	20	
D	1E	line could go	1C	A5	TO
E	00		1D	20	
F	14	Line #20	1E	31	1
			1F	30	0
			20	00	End-line marker

**TABLE 3. DISK STORAGE OF BASIC PROGRAM IN ASCII FORMAT**

The same example program, stored in ASCII format, would appear in its sector as follows:

Byte No.	Byte	Comments	Byte No.	Byte	Comments
1	0D	Start/end marker	15	20	Space
2	31	1	16	41	A
3	30	0	17	3B	;
4	20	Space	18	53	S
5	49	I	19	51	Q
6	4E	N	1A	52	R
7	50	P	1B	28	
8	55	U	1C	41	A
9	54	T	1D	29	
A	20	Space	1E	3A	:
B	41	A	1F	47	G
C	0D	Start/end marker	20	4F	O
D	32	2	21	20	Space
E	30	0	22	54	T
F	20	Space	23	4F	O
10	50	P	24	20	Space
11	52	R	25	31	1
12	49	I	26	30	0
13	4E	N	27	0D	Start/end marker
14	54	T			



P.O. Box 4364  
 Flint, Michigan 48504  
 (313) 233-5731  
 (313) 233-3125

# ZANIM SYSTEMS

## COMMODORE VIC-20

**ZFIN-1** This FINANCE Program is the most versatile business program available today for general home accounting, checkbook balancing, charts and graphs. The program makes full use of the VIC-20's many features such as color, sound, and the excellent implementation of the function keys for quick, accurate operation selection with NO programming experience required. (The program uses the disk and is compatible with the VIC 1540/41 disk drives. It comes with disk and manual.) Requires 3K super expander cartridge. Cassette **\$29.95** Disk **\$39.95**

## APPLE II-Plus

**ZMAIL1** - A comprehensive mailing label program for the APPLE II+. ZMAIL features full-screen editing capability, five of the most common sorts (NAMES, CITY, STATE, ZIP, COMPANY) plus an extra field for a group identifier. Custom variations available. It comes with disk and manual. Price **\$69.95**

**ZINVEN1** - An inventory control program for small business applications. ZINVEN1 features full-screen editing for maximum flexibility AND several sort options (all are relational sorts). It comes with disk and manual. Price **\$79.95**

**DEALER INQUIRES INVITED.**  
 Please write for more information.

**SEE OUR FULL PAGE AD NEXT MONTH.**

Circle No. 25

## TELECOMMUNICATIONS on the VIC and '64!

"A versatile and exceedingly well-done package." David Malmberg, MICRO  
 "Simply the best & nicest VIC terminal software I have seen." Greg Yob, CREATIVE COMPUTING

We created quite a flurry and earned *rave* reviews with *Terminal-40*, the unique software that transforms the VIC screen into a 40-column smooth-scrolling display. And with features like a Receive Buffer and VIC printer dump, *Terminal-40* sets a new standard for personal modem communications with networks such as CompuServe and Source. Our '64 *Terminal* does the same quality job for the '64.

And now there's even MORE!!! *SuperTerm* for the VIC and '64 supports text storage to disk or tape and program UPLOAD/DOWNLOAD. *SuperTerm*, used with our Smart ASCII interface, also supports popular parallel printers.

Choose the one right for you. Call or write today for the "best", then...



For the VIC:  
**Terminal-40** (req. 8K exp) **\$29.95**  
**SuperTerm** (req. 16K exp) **Call**

For the Commodore 64:  
**'64 Terminal** **\$29.95**  
**SuperTerm** **Call**

(On cassette. Requires modem)



**MIDWEST  
MICRO inc.**

311 W. 72nd ST. • KANSAS CITY • MO • 64114

# REACH OUT and BYTE SOMEONE!

ORDER DESK: (816) 333-7200

Send for a free brochure describing our other quality products.

MAIL ORDER: Add \$1.50 shipping and handling  
 (313) 233-5731 VISA/Mastercard and 24 Hour Card  
 and 24 Hour 24 Hour Missouri residents include 4.5%  
 state tax. Foreign orders payable US\$ 115. Bank  
 ONLY add to shipping. Dealer inquiries invited.

**TABLE 4. DISK STORAGE OF A MACHINE-LANGUAGE PROGRAM**

As a sample program in machine-language, consider the following:

Hex Loc.	Machine Code	Mnemonic
6000	86 AA	LDA #SAA
6002	B7 65 00	STA \$6500
6005	39	RTS

keep the summary separate from the disk. We extensively modified Roslund's program and came up with DISKLIST.

DISKLIST prints the file name/extension, notes whether the file is binary or ASCII, lists the number of granules used, and prints the start, end, and exec addresses for machine-language programs. Most important, it does this on a printout that is just the right size to fasten to the disk jacket. If the table contains more files than will fit on one side of the jacket, DISKLIST prints "continued on back" and finishes the listing with a new table that can be attached to the reverse side of the disk jacket.

The name/extension, file-type flag and ASCII flag, and the three addresses for machine-language files are saved in arrays; if you ever want to do anything

The command SAVEM "TEST.BIN", &H6000, &H6005, &H6000 produces the following bytes in the sector used to hold this program:

Byte No.	Byte	Comments
1	00	"Begin" marker
2	00	Program is
3	06	6 bytes long
4	60	Start address
5	00	is \$6000
6	86	
7	AA	
8	B7	The
9	65	program
A	00	bytes
B	39	
C	FF	"End" marker
D	00	
E	00	
F	60	Execute address
10	00	is \$6000

else with the information, such as alphabetize the names for instance, just add the program code onto the end of our listing. We think you will agree that this is a very handy way to keep track of disk directories.

**In Conclusion**

We hope that this discussion of the makeup of BASIC and machine-language program files will give you the information you need to make better use of the disk system in your computing efforts. We also hope that the utilities will be useful, particularly in light of the high cost of many "Disk Doctor" and DISKZAP-type programs

that are available commercially. We haven't seen any of them, so we aren't in a position to compare their features with ours, but we feel that what we have done is worth at least the price of this magazine.

We were going to tell you how to beat that intermittent contact problem, weren't we? Unfortunately, there probably isn't any way to cure it permanently, short of soldering everything together, but we think we have found the next best thing. There are products sold for just this purpose: that is, keeping contact fingers clean on circuit boards in critical commercial equipment. We use Gold-Wipes®, made by the Texwipe Company, Upper Saddle River, NJ 07458. These are small, foil-sealed packets containing pads soaked in a solvent and contact-conditioning agent selling for about 25¢ apiece in boxes of 100. Friends or members of a computer club could go together and buy a box, but even if you have to shell out the whole \$25 yourself, it's well worth it. A treatment every month or so with these pads has cured our dirty-contact blues, and until Radio Shack wakes up and puts gold-plated connectors on their disk equipment, it should be a good fix for your system too.

You may contact the authors at Dept. of Chemical & Metallurgical Eng., U. of Alabama, P.O. Box 2662, University, AL 35486.

**Listing 1**

```

10 'DISKLOOKUTILITY
20 'BY MICHAEL DUDGEON AND BILL CLEMENTS
25 'COPYRIGHT © 1983 BY MICRO Ink
30 CLEAR2000:DIM E(20)
40 CLS3:PRINT@43,"DISKLOOK";
50 PRINT@96,"ENTER GRANULE NO. IN HEX ";
   :LINEINPUTG$:IF G$<>"D" THEN 70
60 T=17:INPUT"SECTOR(1-18)";S:GOTO 90
70 G=VAL("&H"+G$):IF G>33 THEN T=INT(G/2)+1
   ELSE T=INT(G/2)' TRACK NO.
80 S1=G/2-INT(G/2):IF S1=0 THEN INPUT"SECTOR(1-9)";S
   ELSE INPUT"SECTOR(10-18)";S
90 S1=0:PRINT"TRACK" T"SECTOR" S:DSKI$ 0,T,S,A$(1),A$(2)
100 FOR Y=1 TO 2:IF T=17 AND S=2
   THEN PRINT"BYTE NUMBERS=GRANULE NUMBERS"
110 IF T=17 THEN FOR X=0 TO 127 ELSE FOR X=1 TO 128
120 IF T=17 THEN P$=MID$(A$(Y),X+1,1)
   ELSE P$=MID$(A$(Y),X,1)
130 PRINTUSING"%% % % % % %";
   HEX$(X),HEX$(ASC(P$)),P$
140 IF X=0 OR X/14<>INT(X/14) THEN 180
150 '<@>: RETURN TO DISKLOOK
   <D>: CREATE NEW DIRECTORY ENTRY
   <C>: CHANGE BYTE IN FILE <F>: FILE ANALYSIS
160 A$=INKEY$:IF A$="" THEN 160 ELSE IF A$="e" THEN 40
170 IF A$="D" THEN 200 ELSE IF A$="C" THEN 320
   ELSE IF A$="F" THEN 350 ELSE IF A$="↑" THEN X=X-2
180 NEXT X,Y:GOTO 40
190 ' CREATE NEW DIRECTORY LISTING
200 CLS2:PRINT"CREATE NEW DIRECTORY ENTRY";:
   FOR S=3 TO 9:DSKI$ 0,17,S,A$,B$:C$=A$
   +LEFT$(B$,127):FOR I=1 TO 225 STEP 32:
   IF ASC(MID$(C$,I,1))<>0 AND ASC(MID$(C$,I,1))
   <>255 THEN NEXT I,S' FIND FIRST UNUSED SLOT
210 IF I>L28 THEN L9=2:I=I-128 ELSE L9=1
220 A$(1)=A$:A$(2)=B$
230 PRINT@96,"FILENAME.EXT: ";:LINEINPUTXX$:
   XX=INSTR(XX$,".")+INSTR(XX$,"/"):XY=
   LEN(XX$):R$=RIGHT$(XX$,3):XX$=LEFT$(XX$,XY-4)
   +STRING$(12-XY,"")+R$:IF R$="DAT"
   THEN R2=255 ELSE R2=0
240 R3$=RIGHT$(XX$,3):IF R3$="BAS" THEN FT=0
   ELSE IF R3$="DAT" THEN FT=1 ELSE IF
   R3$="BIN" THEN FT=2
250 XX$=XX$+CHR$(FT)+CHR$(R2):X=1:
   INPUT"SECTORS IN LAST GRANULE";DD
260 LINE INPUT"ENTER GRANULE NOS. IN HEX,
   <@> AFTER LAST ONE. ";K$:E(X)=1+
   VAL("&H"+K$):IF K$="0" THEN X=X-1 ELSE X=X+1:
   GOTO 260' INPUT GRANULE NOS. IN ORDER
270 DSKI$ 0,17,2,A$,B$:FOR P=1 TO X-1:
   MID$(A$,E(P),1)=CHR$(E(P+1)-1):NEXT P
280 MID$(A$,E(X),1)=CHR$(&H0+DD):
   DSKO$ 0,17,2,A$,B$:INSERT GRANULE NOS.
   IN FILE ALLOCATION TABLE
290 XX$=XX$+CHR$(E(1)-1):INPUT"NUMBER OF BYTES
   IN LAST SECTOR";Z:XX$=XX$+CHR$(0)
   +CHR$(Z)+STRING$(16,0)
300 MID$(A$(L9),I,32)=XX$:DSKO$ 0,17,S,A$(1),A$(2):
   SOUND 5,10:CLS2:GOTO 50
310 ' CHANGE BYTE
320 IF T=17 THEN E0=1 ELSE E0=0

```

(Continued)

**the**



**WORDPROCESSOR  
FOR THE COMMODORE 64™  
ALSO CHECKS YOUR SPELLING!**

# SCRIPT 64

Suggested Retail: \$139.95

**“REALLY FOXY IS BEING LETTER PERFECT”**

**Contact Your Nearest Commodore Dealer Today . . .  
You'll Be So Glad You Did!**

**Distributed By:  
COMPUTER  
MARKETING**



**SERVICES INC.**

300 W. Marlton Pike  
Cherry Hill, New Jersey 08002  
(609) 795-9480

Commodore 64 is a trademark of Commodore Electronics Limited  
Script 64 is a trademark of Richvale Telecommunications

Circle No. 27

**Listing 1 (continued)**

```

330 CLS4:PRINT@8,"CHANGE ONE BYTE";:PRINT@96,
"BYTE NO.(HEX) TO CHANGE";:INPUTBB$:
INPUT"NEW BYTE";NC$:MID$(A$(Y),VAL("&H"+BB$)+E0,1)
=CHR$(VAL("&H"+NC$)):DSK0$ 0,T,S,
A$(1),A$(2):CLS2:GOTO 50
340 ' FILE ANALYSIS
350 CLS8:PRINT@41,"FILE ANALYSIS";:PRINT@96,
"FILE NAME: ";:LINEINPUTF$:IF LEN(F$)<8
THEN F$=F$+STRING$(8-LEN(F$)," ")
360 PRINT@128,"EXTENSION: ";:LINEINPUTE$:F$=F$+E$
370 FOR X=3 TO 9:DSKI$ 0,17,X,A$,B$:
IF INSTR(A$,F$) OR INSTR(B$,F$) THEN 380
ELSE NEXT X:PRINT"ENTRY NOT FOUND":
FOR X=1TO2000:NEXTX:GOTO350
380 X=INSTR(A$,F$):IF X=0 THEN X=INSTR(B$,F$):
A$=B$' X=BYTE NO. FOR ENTRY LOCATED
390 A$=MID$(A$,X,32)' A$ NOW=THAT SINGLE ENTRY REQUESTED
400 C=ASC(MID$(A$,12,1)):IF C=0
THEN PRINT"BASIC" ELSE IF C=1 THEN PRINT"DATA"
ELSE PRINT"MACHINE LANGUAGE"
410 IF ASC(MID$(A$,13,1)) THEN PRINT"ASCII" ELSE PRINT"BINARY"
420 E(1)=ASC(MID$(A$,14,1))
430 N=ASC(MID$(A$,16,1))
440 DSKI$ 0,17,2,A$,B$
450 X=1
460 E(X+1)=ASC(MID$(A$,E(X)+1,1)):
IF E(X+1)>8HF THEN SC=E(X+1)-8HC0
ELSE X=X+1:GOTO 460
470 PRINT"GRANULES:":FOR P=1 TO X:PRINT"$"
+HEX$(E(P)):NEXT P:PRINT"SECTORS IN LAST
GRANULE:"SC:PRINT"BYTES IN LAST SECTOR: ";
"$"+HEX$(N):PRINT:PRINT"HIT ANY KEY
TO CONTINUE";
480 IF INKEY$<>" " THEN CLS3:GOTO40: ELSE 480
    
```

**Listing 2**

```

10 ' DIRDUPL UTILITY
20 ' DIRECTORY BACKUP AND RETRIEVAL
30 ' BY MICHAEL DUDGEON AND BILL CLEMENTS
35 ' COPYRIGHT @ 1983 by MICRO Ink
40 CLEAR3000:CLS3
50 PRINT@5,"DISK DIRECTORY BACKUP":
PRINT@69,"(1) BACK UP DIRECTORY":
PRINT@101,"(2) RETRIEVE DIRECTORY":
PRINT@165,"WHICH";:INPUTW
60 PRINT@229,"DRIVE NO. ";:INPUTDN
70 ON W GOTO 90,140
80 GOTO50
90 FOR X=2 TO 8
100 DSKI$ DN,17,X,A$,B$:DSK0$ DN,17,X+10,A$,B$
110 NEXT X
120 DSKI$ DN,17,9,A$,B$:DSK0$ DN,17,1,A$,B$
130 END
140 FOR X=2 TO 8
150 DSKI$ DN,17,X+10,A$,B$:DSK0$ DN,17,X,A$,B$
160 NEXT X
170 DSKI$DN,17,1,A$,B$:DSK0$ DN,17,9,A$,B$
180 END
    
```

**Listing 3**

```

10 'DISKLIST - DIRECTORY PRINTING UTILITY
20 ' BY BILL CLEMENTS
25 ' COPYRIGHT @ 1983 by MICRO Ink
30 CLS:CLEAR2000:C$=CHR$(13):
PRINTTAB(6)" DIRECTORY PRINTER"C$
40 DIMGR(67),N$(68),SA(68),EA(68),XA(68),T(68),F(68)
50 INPUT"DRIVE NO";DN:PRINT"PRINTED OUTPUT (Y/N)":
LINEINPUT"(DEFAULT IS 'N')";:Q$:
IFQ$="Y" THEN Q=-2 ELSE Q=0
60 L=0:LX=25:LINEINPUT"DISK NAME? ";D$:IFQ=0 THEN CLS
70 PRINT#Q,TAB(10)"DISK: "D$:GOSUB370
80 DSKI$DN,17,2,A$,B$:B$=LEFT$(A$,68):
FORI=1TO68:GR(I-1)=ASC(MID$(B$,I,1)):NEXT
'LINKED LIST OF FILE GRANULES
90 FORI=3TO11:DSKI$DN,17,I,X$,Y$:
X$=X$+LEFT$(Y$,116)'GET DIRECTORY ENTRIES
100 FORJ=0TO7:L=L+1:JJ=32*J:N$(L)=MID$(X$,JJ+1,8)
+"."+MID$(X$,JJ+9,3):G=ASC(MID$(X$,JJ+14,1)):
FG=G 'NAME, EXTENSION, FIRST GRANULE
110 T(L)=ASC(MID$(X$,JJ+12,1)):F(L)=
ASC(MID$(X$,JJ+13,1)) 'FILE TYPE, ASCII FLAG
120 IFF(L)=0 THEN T$="BIN" ELSE T$="ASC"
130 B=ASC(LEFT$(N$(L),1)):IF B=0 THEN 200
ELSE IF B=255 THEN 210 'SKIP IF KILLED OR UNUSED
140 FORK=1TO68:IF GR(G)<68 THEN G=GR(G):
NEXTK 'SEARCH FOR LAST GRANULE
150 IF T(L)=2 THEN 230 'GO FIND ML ADDRESSES
160 IFL>LX THEN 350 'COUNT FILES
170 PRINT#Q,TAB(3)N$(L)TAB(17)T$TAB(20)K;
180 IF T(L)=2 THEN PRINT#Q,TAB(22)"$"+SA$+"$"+EA$+"$"+XA$;
190 PRINT#Q
200 NEXTJ,I
210 PRINT#Q,C$TAB(12)"FREE GRANULES: ";FREE(DN)
220 STOP
230 LS=GR(G)AND31 'NO. SECTORS USED IN LAST GRANULE
240 LB=ASC(MID$(X$,JJ+16,1)) 'BYTES IN LAST SECTOR
250 T=INT(FG/2)-(FG>=34)'TRACK NO. OF FIRST GRANULE
260 S=1+9*(FG AND1)'FIRST SECTOR FOR
EVEN GRANULES =1, FOR ODD GRANULES=10
270 DSKI$DN,T,S,A$,B$ 'GET ML ADDRESSES
280 SA(L)=256*ASC(MID$(A$,4,1))+ASC(MID$(A$,5,1)):
SA$=HEX$(SA(L)):SA$=STRING$(4-
LEN(SA$),"0")+SA$ 'START ADDRESS
290 EA(L)=SA(L)+256*ASC(MID$(A$,2,1))
+ASC(MID$(A$,3,1))-1:EA$=HEX$(EA(L)):EA$=STRING$(
4-LEN(EA$),"0")+EA$ 'END ADDRESS
300 T=INT(G/2)-(G>=34)'TRACK NO. OF LAST GRANULE
310 S=1S+9*(G AND1)'LAST SECTOR NO.
320 DSKI$DN,T,S,A$,B$:A$=A$+LEFT$(B$,127)
330 XA(L)=256*ASC(MID$(A$,LB-1,1))
+ASC(MID$(A$,LB,1)):XA$=HEX$(XA(L)):XA$=STRING$(
4-LEN(XA$),"0")+XA$ 'EXEC ADDRESS
340 GOTO160
350 PRINT#Q,C$TAB(9)"CONTINUED ON BACK"C$C$
360 GOSUB370:LX=68:GOTO170
370 PRINT#Q,TAB(7)"NAME"TAB(15)"TYPE,GR.
START,END,EXEC":PRINT#Q,TAB(7)STRING$(32,".")
380 RETURN
    
```



**Powerful — Economical — Professional**

Peripherals for your Apple II\*



Ultra Rom Board/Editor \$190.00 APB - 102

A/D 12-Bit, 16 Channel \$450.00 AD - 121602

- Simple Software Selection of Channels
- Range ±10, ±5, ±2.5, +5, +10
- High-Speed 25 μ Sec. Conversion
- Full Software Support — Disk or Prom
- Adjustable Bipolar Reference
- Powerful G.P.L.E. [Global Program Line Editor] built in
- Includes: Search and Replace — Insert and Delete — and much more
- Edit programs 2 to 5 times faster
- 32K of Bank Switchable ROM Space
- Totally Transparent - Remove or Reload with a few keystrokes - without disk!
- Extensive Macro Table eliminates multiple keystrokes for common operations
- Useful Ampersand [&] Utilities all in one place
- Applesoft\* Extensions including "IF, THEN, ELSE"
- Support for other HOLLYWOOD HARDWARE Products in Rom

6842 Valjean Avenue, Van Nuys, California 91406 (213) 989-1204 \*Trademarks of Apple Computer Inc. Circle No. 28

# Products for Commodore, Atari, Apple, and others!


## NEW THE MONKEY WRENCH II A PROGRAMMERS AID FOR ATARI 800 NEW AND IMPROVED — 18 COMMANDS PLUGS INTO RIGHT CARTRIDGE SLOT

If you are a person who likes to monkey around with the ATARI 800, then THE MONKEY WRENCH II is for you! Make your programming tasks easier, less time-consuming and more fun. Why spend extra hours working on a BASIC program when the MONKEY WRENCH can do it for you in seconds. It can also make backup copies of boot type cassette programs. Plugs into the right slot and works with ATARI BASIC cartridge.

The MONKEY WRENCH provides 18 direct mode commands. They are: AUTO LINE NUMBERING — Provides new line numbers when entering BASIC program lines. RENUMBER — Renumbers BASIC's line numbers including internal references. DELETE LINE NUMBERS — Removes a range BASIC line numbers.

VARIABLES — Display all BASIC variables and their current value. Scrolling — Use the START & SELECT keys to display BASIC lines automatically. Scroll up or down BASIC program. FIND STRING — Find every occurrence of a string. XCHANGE STRING — Find every occurrence of a string and replace it with another string. MOVE LINES — Move lines from one part of program to another part of program. COPY LINES — Copy lines from one part of program to another part of program. FORMATTED LIST — Print BASIC program in special line format and automatic page numbering. DISK DIRECTORY — Display Disk Directory. CHANGE MARGINS — Provides the capability to easily change the screen margins. MEMORY TEST — Provides the capability to test RAM memory. CURSOR EXCHANGE — Allows usage of the cursor keys without holding down the CTRL key. UPPER CASE LOCK — Keeps the computer in the upper case character set. HEX CONVERSION — Converts a hexadecimal number to a decimal number. DECIMAL CONVERSION — Converts a decimal number to a hexadecimal number. MONITOR — Enter the machine language monitor.


In addition to the BASIC commands, the Monkey Wrench also contains a machine language monitor with 16 commands used to interact with the powerful features of the 6502 microprocessor.



\$59.95

## NEW VIC RABBIT CARTRIDGE AND CBM 64 RABBIT CARTRIDGE

"High-Speed  
Cassette  
Load and Save!"



Expansion Connector  
on the VIC Cartridge

\$39.95  
(includes Cartridge  
and Manual)

"Don't waste your Life away waiting to LOAD and SAVE programs on Cassete Deck."

Load or Save 8K in approximately 30 seconds! Try it — your Un-Rabbitized VIC takes almost 3 minutes. It's not only Fast but VERY RELIABLE.

Almost as fast as VIC Disk Drive! Don't be foolish — Why buy the disk when you can get the VIC Rabbit for much, much less!

Easy to install — it just plugs in.  
Expansion Connector on rear.  
Works with or without Expansion Memory.  
Works with VIC Cassete Deck.  
12 Commands provide other neat features.  
Also Available for 2001, 4001, and 8032

## Now for the "64" STCP — 300/1200 Baud Standard Terminal Communications Package

\*PFO\* IOD OOA CP<D1>D2 BELL = 12:30:00 10:14:36

Don't settle for non-standard Communications Protocol! Access Micro Net, Source, Bulletin Boards, Local Mainframe, etc.




- Complete Package — Includes RS232 Interface Board and software (does not include modem)
- Communicates in Industry Standard ASCII Upload/Download to/from Disk
- Automatic File Translation
- Can be controlled from keyboard or user supplied basic or machine language program

Specify 3.0 or 4.0 ROMS or 8032 Commodore Computer 4040 or 8050 or PEDISK II Disk or CBM64 on 1541.

Price: \$129.95

## ATARI AND PET EPROM PROGRAMMER

Programs 2716 and 2532 EPROMs. Includes hardware and software. PET = \$75.00 — ATARI (includes sophisticated machine language monitor) = \$119.95



Prowriter Printer - Excellent dot matrix print. Parallel = \$489.00  
Serial = \$600.00 IEEE = \$589.00

## PET BASIC SCROLL PROGRAM

Scroll thru Basic Programs using cursor up/down keys. Specify computer. \$6.00 on cassette, \$9.00 on diskette.

## 65C02 MAE

Same as our MAE but enhanced for the new 65C02 Opcodes. Turns your computer into a development system for the new ROCKWELL 65C02 Microprocessor. \$200.00 — Specify Computer.

## 6800 CROSS ASSEMBLER

A Cross Assembler based on the MAE that runs on the PET, Apple, or Atari but assembles opcodes for the Motorola 6800 microprocessor. Turns your computer into a development system for the Motorola 6800 Microprocessor. \$200.00 — Specify Computer.

## ATARI and VIC Cartridges


EHS can supply large quantities of ATARI and VIC Cartridges for software developers. If you need cartridges, call for pricing.



**TRAP 65**  
TRAP 65 is a hardware device that plugs into your 6502's socket. Prevents execution of unimplemented opcodes and provides capability to extend the machines' instruction set. For PET/APPLE/SYM. Reduced from \$149.95 to \$69.95

## More than just an Assembler/Editor! Now for the "64"

It's a  
Professionally  
Designed  
Software  
Development  
System



**MAE**  
for  
PET  
APPLE  
ATARI  
~~\$169.95~~  
New  
Price  
\$99.95

Blast off with the software used on the space shuttle project!

- Designed to improve Programmer Productivity.
- Similar syntax and commands — No need to relearn peculiar syntaxes and commands when you go from PET to APPLE to ATARI.
- Coresident Assembler/Editor — No need to load the Editor then the Assembler then the Editor, etc.
- Also includes Word Processor, Relocating Loader, and much more.
- Options: EPROM Programmer, unimplemented opcode circuitry.
- STILL NOT CONVINCED? Send for free spec sheet!

## 5 1/4 INCH SOFT SECTORED DISKETTES

Highest quality. We use them on our PETS, APPLES, ATARIs, and other computers. \$22.50/10 or \$44.50/20



EPROMS 2716 = \$4.50 2532 = \$7.50  
Over 40 Commodore Programs by Baker (on 4040) = \$25.00

DC Hayes Smart Modem = \$235.00  
OC Hayes Micro Modem II = \$289.00  
Rana Disk Drive - 375  
4 Drive Controller - 114

# Eastern House


3239 Linda Dr.  
Winston-Salem, N.C. 27106  
(919) 924-2889 (919) 748-8446  
Send for free catalog!

VISA



Circle No. 29

# The 68000 Educational Computer Board

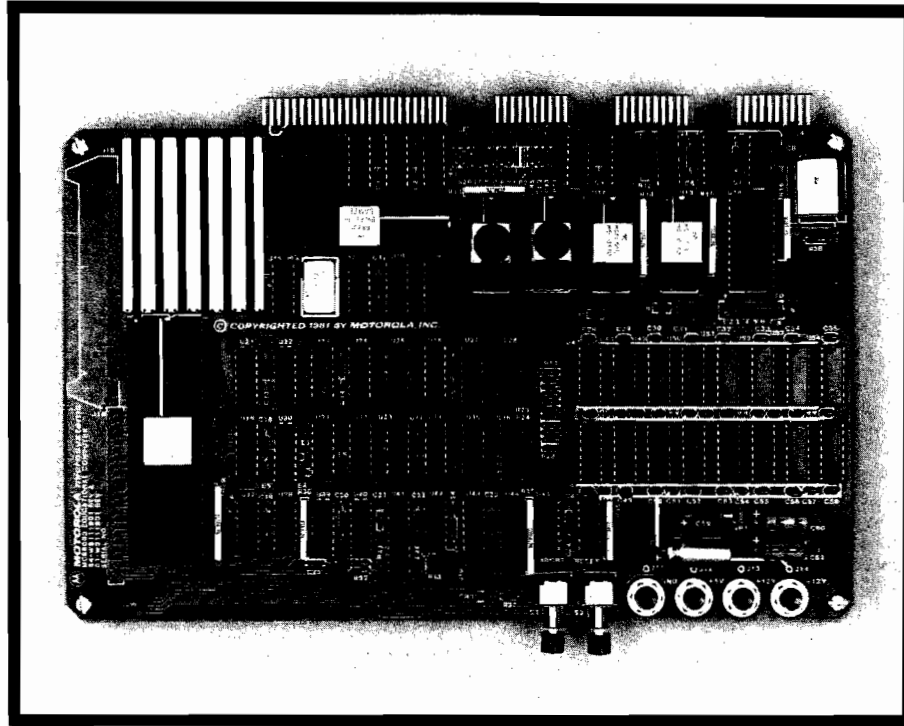

by Terry A. Jackson

One of the exciting items in the micro world these days is the Motorola 68000 16-bit microprocessor. A recent equipment item from Motorola, the MEX68KECB educational computer board, should also prove to be quite popular with those who want to learn how to use the 68000. Recently I purchased one of these boards to help upgrade my skills as a microprocessor instructor, and I am quite pleased with its capabilities. In this article I outline what I feel to be the board's important features so that you can judge whether or not it suits your needs.

## Hardware Highlights

The board contains a 4MHz 68000 processor, 32K of user-programmable dynamic RAM, a 16K ROM monitor, two EIA RS-232C serial ports, a cassette tape recorder port, a parallel printer port, a 24-bit general-purpose programmable timer, and a very small

breadboard area (1 7/8" x 2 3/8"). You must provide a CRT terminal (or a teleprinter) and a power supply with +5-volt and  $\pm 12$ -volt outputs.

The 32K RAM memory removes a major limitation possessed by most of the popular "evaluation kits" and allows you to do some very ambitious programming. You can graduate from games to mini-interpreters, multi-tasking experiments, and other more sophisticated diversions. One of the RS-232C ports is assigned to the system terminal, and the other to a host system. The ports are separately jumper-adjustable to baud rates from 110 to 9600. The presence of a host is not required, since the system runs comfortably without it, but if such a luxury is available, the saving and reloading of programs is greatly enhanced. The cassette recorder port, operating at approximately 1300 baud, means economical mass storage for students with more limited resources.

The 7" x 10.5" - board is not a kit; it comes assembled and tested. Sockets

are used for the 68000, the 68230, the 4116 RAMs, the monitor ROMs, the 6850 serial interface chips, and the 14411 baud-rate generator. An envelope of push-on jumpers is provided for selection of various options, and even a set of insulated spacers and screws is included for mounting the board. Two pushbuttons are mounted on the board; one restarts and reinitializes TUTOR, the ROM-resident monitor, and the other simply aborts any user program, saves registers, and returns control to TUTOR. The abort function is particularly useful for debugging if a user program is in an infinite loop.

Those who want to experiment with hardware add-ons may find the breadboard area adequate, but two connectors can be attached easily for more ambitious expansion. All data lines, fifteen address lines, and most control signals are brought to a 46-pin connector pattern, and a 2 x 25 (0.1" spacing) uncommitted connector pattern allows access to the upper address bit decoder, other control signals, port



connections, or the breadboard area. The 68000 is designed to interface easily not only with its own family of peripherals, but also with the 6800 family.

I would like to pass along some helpful hardware-related hints. First, although the set-up instructions are generally quite detailed, there's a point I did not find mentioned. Your terminal must support the DTR (data terminal ready) line or your system will just stare back at you when you power up. Second, the markings on the lines to the terminal and to the host seem at first glance to be mixed up. Pin 3 on the host connector carries outgoing data and is marked TX DATA. Pin 3 on the system terminal connector carries incoming data and is also marked TX DATA. The reason for this is that the board is intended to look like a modem to the system terminal, and to look like a data terminal to the modem communicating with the host. With this perspective, everything looks normal. Third, many cassette tape recorders do not have the low side of the microphone input tied to the same point in the circuit as the low side of the output jack. If your recorder is one of these, check to see what the effect is of tying these two points together. On my machine, it simply changes the output level. If your recorder cannot tolerate having these two points tied together, you will have to connect one cable at a time, depending on whether you are dumping or loading. (This problem is not unique to the educational computer board. Every tape-oriented system I own or have encountered makes the same assumption, and I have witnessed resultant problems more than once.)

### Software Features

A wide variety of keyboard commands is available using TUTOR. The most significant of these, the single-line assembler and the disassembler, deserve a detailed description. All valid 68000 operations can be entered in source form, one line at a time, from the keyboard. The object code is generated by TUTOR and stored sequentially in memory; however, the source lines are not saved. If you want to make changes, the memory-modify command with the disassembly option can be used to review and change selected instructions. The object code

and disassembled equivalent source are displayed, one line at a time, with the option of entering a different source line or simply advancing to the next instruction. At any time, a printer-attach command can be given and the memory-display command with the disassembly option can be used to produce a disassembled hard copy of the entire program. Finally, the object code can be dumped to the host or to cassette tape for future reloading.

The inability to save source is not as much of a problem as it might seem at first. If further revisions are to be made, a program may be reloaded and the revise-disassemble-dump cycle repeated. The disadvantages of a lack of source storage capability and the inability to use symbolic addressing do not appear to me to be serious for small programming exercises suited to learning the instruction set, but the support of a host system with an editor and assembler would be needed to effectively utilize the 32K of RAM. The equipment manual describes the object program storage format completely. This permits anyone with access to a full-blown assembler with an incompatible format to write a format conversion program. (This is typically a relatively easy job once the initial and target formats are known.)

One of the keyboard commands sets up a transparent mode, in which a direct path exists between the system terminal and the host. This mode allows you to do the entire program development task, editing, assembly, and debugging from a single operating position. A user-selectable exit character will return control to TUTOR.

Several keyboard commands are available to support program debugging. Trace and breakpoint capabilities are included. In trace mode, a program may be stepped through, one instruction at a time. After each step, current register contents are displayed, and the next instruction to be executed is disassembled and displayed. Tracing may be set to run continuously without operator intervention, or to pause after each step and wait for a go-ahead from the operator. If the trace command is preceded by a printer-attach command, a hard copy of the action can be obtained for later review. Up to eight breakpoints can be set at any one time. Each breakpoint may have an optional

count entered as well. If a count,  $N$ , is entered, the program will halt just before the  $N$ th execution of the designated instruction (and at each subsequent encounter), but not before. Breakpoints may be combined with continuous tracing if desired.

The only software flaw I have encountered is in the ASCII string handling for DC directives in the single-line assembler. If a blank is imbedded in the string, the assembler thinks you did not complete the line properly. This problem is avoided easily, and I understand will be fixed in a subsequent revision of TUTOR. The avoidance procedure consists of substituting the memory set command with its ASCII string option, and targeting the command to the same memory location that the disassembler was at when the problem was encountered.

The version of TUTOR that I have is 1.0; revision 1.1 is being shipped as of this writing, and revision 1.2 will be ready to go soon. Motorola sources indicated that enhancements as well as problem corrections can be expected in this newest version. It is apparent to me that they are supporting this product solidly as part of a program to capture a big chunk of the 16-bit market.

### Conclusions

The educational computer board is an excellent choice for those who want to learn a lot about the 68000. It is a learning tool, not a computer to get data processing jobs done. Connected to a host with good language tools, the MEX68KECB's power is tremendously magnified.

The board requires no knowledge of hardware for its use, but permits hardware-oriented users to have some fun, too. No clever gimmicks interfere with almost unlimited hardware add-on projects.

Good software and thorough documentation, combined with a board that has lots of program room, make this an excellent buy at \$495.

---

Terry Jackson is a quality control engineer at Electro-Motive, a locomotive manufacturer in La Grange, IL. He is also an assistant professor at Midwest College of Engineering in Lombard, IL, teaching courses in microprocessor applications. You may contact him at 147 E. View St., Lombard, IL 60148.

---



# MODEMS / CRTS / PRINTERS / SWITCHES / MICRO COMPUTERS / CABLES

MODEMS

PRINTERS | CRTS

PRODUCT DESCRIPTION	LIST	YOUR COST
UDS 103LP, 300 bps, Modem	145	130
UDS 202LP, 1200 bps, Half Duplex Modem	195	150
UDS 212LP, 1200 bps, Full Duplex (212A) Modem	445	CALL
U.S. Robotics Auto Dial 212A, 300/1200 Full Duplex Modem	599	475
Incomm Auto Dial 212A, 300/1200 Full Duplex Modem	599	450
Cermetec Auto Dial 212A, 300/1200 Full Duplex Modem	595	495
Microband Auto Dial 212A, 300/1200 Full Duplex Modem	695	495
Rixon Intelligent Modem, 300/1200 (10 Number)	495	CALL
Rixon PC 212A (IBM PC Modem Card) 300/1200	495	CALL
Incomm Multi Dial 300/1200 (10 Number)	795	550
U.S. Robotics Password 300/1200 (Auto Dial) Modem	495	CALL
U.S. Robotics Courier, Osborne, 300/1200 Modem	518	CALL
U.S. Robotics S-100, 300/1200 Auto Dial Modem	495	CALL
Visual 50 CRT	695	550
Freedom 100 CRT, w/20 F, keys & Editing	595	550
Incomm Remote Station I, w/Integrated 300/1200 Modem	1295	995
Epson MX80/Graftrax +	650	399
Epson MX80 FT/Graftrax +	700	498
Epson MX100/Graftrax +	900	700
Epson FX-80	750	656
Star Micronics Gemini 10	399	350
Star Micronics Gemini 15	649	548
AJ Letter Quality Printer, 30 CPS (KSR)	1450	1250

PRODUCT DESCRIPTION	LIST	YOUR COST
Incomm AB Switch, 8 Pin	120	84
Incomm AB Switch, 25 Pin	159	98
Incomm ABC Switch, 25 Pin	198	138
IDS Breakout Box (Blue Box)	159	140
Incomm Breakout Box (Bob)	150	120
Epson, HX-20-AA	795	CALL
Epson QX-10/256K	2995	CALL
Zenith Z-100	4000	CALL
T-7MM, 7 Pin, 4 Wire, Telephone Cable (Modular Plugs)	10	7
S-975, Modular Double Adapter	7	5
EIA 9/5, RS 232, 9 Pin Cable, 5 FT MM/FF/MF	15	12
EIA 25/5, RS 232, 25 Pin Cable, 25 FT MM/FF/MF	22	14
EIA 50/5, Centronics Parallel Cable, 5 FT (36 Pin)	30	21
MC 0050/10, Centronics 10 Ft. MM Cable, 36 Pin (10 FT)	38	25
7010/5, IBM PC Printer Cable w/36 Pin	40	22
8010/5 Apple II Printer Cable w/36 Pin	27	18
9010/5, Atari Printer Cable w/36 Pin	30	21
U.S. Robotics Teipac	79	CALL
Rixon PC Com 1 (IBM PC Software)	69	CALL

BOB SWITCHES

COMP. UTILITY

CABLES

SOFT. WARE

## ORDER TOLL FREE - 1-800-323-2666

### TOUMAYAN & ASSOCIATES

115 N. Wolf Rd.  
Wheeling, IL 60090  
**312-459-8866**

We Welcome:

- Visa, Mastercharge
- Checks
- Company P.O.
- C.O.D. (Add. \$1.50/Shipment)

Circle No. 30

## EVER WONDER HOW YOUR APPLE II WORKS?

**QUICKTRACE will show you! And it can show you WHY when it doesn't!**

This relocatable program traces and displays the actual machine operations, while it is running and without interfering with those operations. Look at these FEATURES:

**Single-Step mode** displays the last instruction, next instruction, registers, flags, stack contents, and six user-definable memory locations.

**Trace mode** gives a running display of the Single-Step information and can be made to stop upon encountering any of nine user-definable conditions.

**Background mode** permits tracing with no display until it is desired. Debugged routines run at near normal speed until one of the stopping conditions is met, which causes the program to return to Single-Step.

**QUICKTRACE** allows changes to the stack, registers, stopping conditions, addresses to be displayed, and output destinations for all this information. All this can be done in Single-Step mode while running.

**Two optional display formats** can show a sequence of operations at once. Usually, the information is given in four lines at the bottom of the screen.

**QUICKTRACE** is completely transparent to the program being traced. It will not interfere with the stack, program, or I/O.

**QUICKTRACE** is relocatable to any free part of memory. Its output can be sent to any slot or to the screen.

**QUICKTRACE** is completely compatible with programs using Applesoft and Integer BASICS, graphics, and DOS. (Time dependent DOS operations can be bypassed.) It will display the graphics on the screen while **QUICKTRACE** is alive.

**QUICKTRACE** is a beautiful way to show the incredibly complex sequence of operations that a computer goes through in executing a program

**Price: \$50**

**QUICKTRACE** requires 3548 (\$E00) bytes (14 pages) of memory and some knowledge of machine language programming. It will run on any Apple II or Apple II Plus computer and can be loaded from disk or tape. It is supplied on disk with DOS 3.3.

**QUICKTRACE** was written by John Rogers. **QUICKTRACE** is a trademark of Anthro-Digital, Inc.

## QUICKTRACE DEBUGGER

	Last address		Disassembly	
Last instruction	FF69-	A9 AA	LDA	#\$AA
		Top seven bytes of stack		Processor codes User defined location & Contents
Stack	ST=7C	A1 32 D5 43 D4 C1	NV-BDIZC	0000=4C
	Accumulator	X reg.	Y reg.	Stack pointer
Contents	A=AA	X=98	Y=25	SP=F2 PS=10110001 []=DD
			Disassembly	Reference address
Next instruction	FF6B-	85 33	STA	#\$33 [ \$0033 ]

**Anthro-Digital, Inc.**  
P.O. Box 1385  
Pittsfield, MA 01202  
413-448-8278

COMPU SENSE

# ATARI ADAPTOR

Play your 2600 games  
on your VIC-20®

**\$79<sup>95</sup>**

Frogger

Centipede

Strawberry  
Shortcake

Space  
Cavern

Shark Attack  
Racquetball

**Shipping & Handling Charges:**

First two (2) items - \$2.00 per item.

Three (3) or more items - \$1.00 per item.

For orders over \$100 total, surface shipping will be paid by CompuSense. Blue Label or special handling will be paid by the customer.

Additional \$2.00 C.O.D. fee on all C.O.D. orders.

MasterCard and Visa accepted. Give card number and expiration date on order form.

Allow three (3) weeks for personal checks.

**TO ORDER:**

P.O. Box 18765  
Wichita, KS 67218  
(316) 263-1095



*Prices subject to change.*

VIC-20® is a registered trademark of Commodore

Write for  
**FREE**  
**Catalog!**

VIC-20 or C-64

Circle No. 32

# A UNIX-like OPERATING SYSTEM FOR 6809 MICROPROCESSORS

by **STEPHEN L. CHILDRESS**

Unless you've been on sabbatical to Siberia of late you will have noticed the swell of interest in the Unix™ operating system software. Most new and all the old popular 16-bit computers are supporting Unix or one of the numerous look-alikes. Why all the furor? It seems at last we've begun to rethink computer programming and usage. Recognizing that software development is expensive and time-consuming, we must exploit the falling cost of today's hardware. In this article, I explain how a new operating system software philosophy is being applied to small microcomputers capable of supporting a MC6809 processor. This software is called "OS-9" and is a good example of the rewards of rethinking system software.

This article is not so much to sing the praises of OS-9 as it is to point out the disappointing fact that most new computers being introduced today are a rehash of the disk operating systems of the 1970's (CP/M, PC-DOS, Apple DOS, etc.) There is a real catch-22 here exemplified by the IBM PC, which has a large memory space; it is running an improved but non-the-less CP/M derivative and therefore does not take advantage of the memory size to make the system more cost-effective. Another good example is Apple DOS, which, when outfitted with a new inexpensive hard disk, must resort to treating it in BASIC with some 72 independent floppy disks.

To date, the 6809 has not found the

success of the Z-80, et. al., not because it is inferior, but because it was introduced too near in time to the 16-bit chips. The 8086 and 8088 are used in systems that are not much better, faster, or cheaper than good Z-80 systems. But for the hundreds of thousands of byte-wide (8-bit) computers, OS-9 and the 6809 can be retrofitted to bolster the capabilities of existing systems. OS-9 is, at the time this is written, some two years mature and running on all of the "SS 50" computers, the Apple II, and several European computers. But lacking marketing giants like Tandy and IBM, the machines remain in the fringe areas and have a limited collection of off-the-shelf applications software. Rumor has it that Tandy is developing OS-9 for the Color Computer.

## Time for Change

The Unix supporters favor a switch from yesterday's system software philosophies, which have evolved into stubborn, unwieldy enemies of the programmer and, consequently, the end-user. Bell Labs launched the Unix philosophy, the bottom line which might be described as: "Since software is increasingly expensive to develop, let's change the priorities from frugality in hardware and to abstraction in software design."

The Unix philosophy is reflected in the jargon: "Shell," "Kernal," "Filter," "Pipe," "Tee," and

"Socket" - each suggests a simple abstract idea about data processing. For example, Kernal and Shell simply refer to parts of the operating system that can be compared to layers. The concepts Filter, Pipe, and Tee deal with problems such as data base management more easily than the older "query, sort, merge, and report." General abstraction does cost more in terms of hardware, but in today's systems where hardware is a small part of a complete system price, the new priorities are encouraging.

## OS-9 Evolution

While Unix was finding its way from DEC PDP-11/45's and 70's to other minicomputers, Motorola and Microware Systems Corporation teamed to produce software that would exploit the capabilities of the new MC6809 "pseudo 16-bit" microprocessor chip, which has all the memory addressing mode power of the minicomputers. The feature that distinguishes micros originally intended for use in industrial controllers from computers for general use is strength in addressing modes. The idea these two companies had was to develop an extremely modular set of reusable software. The benefits of modular software has been known for some time; but it has been realized only in limited terms, requiring the programmer to use monolithic compilers, assemblers, and linkers to effect a merger of modules. Although this works well, it is time consuming and far from ideal. Motorola wanted modularization to the extent of mass-produced "software-on-silicon" (ROMs). Before processors of the 6809's power, such an idea was impractical because of the lack of addressing power.

What is the ideal format for modularization? Here is a wish list, with the scientific name of the species in brackets:

1. Software modules that can be placed anywhere in memory without reassembly or linking — just copy it to memory verbatim from some media such as a disk. [Position-independence]
2. Modules that reside in EPROM or ROM already plugged into the address space of the machine. This would be good for modules that are used often. [ROM-able, Reentrant]

3. Modules that intercommunicate in a standard fashion without subtle sneak-paths that can get fouled up. Forbid fragile, spider-web arrangements of software interaction. [Stack-oriented]
4. The modules should contain "pure code" only and the variables used by a module should be in RAM supplied by the modules' parent (caller).
5. Allow programmer to "activate" modules coming from the software toolbox. These should have all the flexibility of old, stable modules. [Loadable]
6. For non-ROM modules (RAM), allow those not needed for the job at hand to be removed from memory, making more space for other modules.
7. Since requirements change and mistakes do happen, allow a new module to temporarily supercede an old one without hassle. [Precedence]
8. Allow modules to be shared among several users. [Reentrancy]
9. The system software should worry about which language is being used in a particular module — assembly, BASIC, etc..
10. The modules should be able to perform I/O without any knowledge of who/what/how regarding the I/O devices.
11. And last but not least, KISS! That's "Keep It Simple, Stupid."

Simple means small, and don't forget that modularization is supposed to mean that a non-Ph.D. can understand the overall system by concentrating on one piece at a time.

This is a tall order. What would the user's benefit be? The idea is to eliminate the aggravations caused by the older system philosophy. Consider this list of nuisances the computerist must face every day:

1. He needs to run Program B while in A, but A is incompatible with B because they both use the same memory region for their code.
2. A jury-rigged version of program B is made up to let B hide from A, say in high memory.
3. But A and B still fight over the same memory cells for variables. The hide and seek continues with some successes, some hoakey fixes, and a few subtle disasters.
4. The programmer would like to swap A and B but he needs fast (expensive) disks.
5. Multiple users on a micro? There's not enough memory for two copies of the 20K-byte language program let alone the 8K or so for the programs.
6. The operating system doesn't support multiple terminals.
7. The operating system is too complex and will not allow changing I/O conditions without surgery, hacking, patching, and kludging.

8. A change to the I/O would require adjustments to almost all software. But much of it is copy-protected and cannot be modified.

9. Why should the user have to spend \$400 for a "print spooler" hardware box? Why can't the computer take 2% of its time to copy a disk file to the printer port without hassle?

These gripes go a long way back in time and remain today, even in improved operating systems like PC-DOS for the IBM. If you look, you'll see that the module wish list covers all of these headaches. Now let's look at what Motorola and Microware did to achieve these goals.

### The OS-9 Big Picture

The OS-9 operating system is constructed from modules of machine code, each of which has:

- A string of ASCII characters that gives the module a name
- A module "header" that gives the module type, size, etc.
- Module's revision number
- Distance to the module's first instruction
- For program modules (as opposed to subroutines), the memory storage [RAM] required by the module
- A CRC module checksum to prevent bogus disk files (text) or improper ROMs from being treated as modules

Programs consist of one or more modules and may call subroutines or programs located in other modules. Compilers and interpreters (e.g., BASIC) are merely program modules. If a module is invoked by some program and that module is not in memory, OS-9 will automatically retrieve the module from disk. When no program needs use of a certain module, OS-9 removes it from memory and returns that memory to the pool of uncommitted memory. Though the users really need not be concerned with where modules are in memory, the "MDIR" utility shows a directory of in-memory modules as shown in figure 1.

The module directory shows each module's name, address in memory, size, attributes (program, subroutine, language, etc.), revision, and "use" count. The I/O drivers and the peripherals (device modules) are each handled by independent modules subordinate to modules RBF or SCF,

Figure 1 OS-9 Memory-Resident Module Directory

Module Directory at 21:28:13							
Addr	Size	Typ	Rev	Attr	Use	Module	Name
F000	4D0	C1	1	r...	1	OS9p2	Kernal, part 2
F4D0	2E	C0	1	r...	1	Init	System initialization module
F4FE	1BA	C1	1	r...	1	Boot	System Boot media fetcher
F800	7BF	C1	1	r...		OS9	Kernal, part 1
BA00	7F	C1	1	r...	1	SysGo	Starts up main user on "TERM"
BA7F	193	E1	1	r...	8	ACIA	Driver for RS232 serial devices
BC12	38	F1	1	r...	2	TERM	Device module for 1st CRT
BC4A	651	C1	1	r...	1	IOMAN	Chief executive for all I/O
C29B	BBC	D1	1	r...	1	RBF	Chief of all File I/O, any device
CE57	41C	D1	1	r...	8	SCF	Chief of all Character I/O device
D273	33A	E1	1	r...		DC3	Device driver for mini-floppy
D5AD	2C	F1	1	r...		D0	Device module for minifloppy #0
D5D9	2F	F1	1	r...	1	H0	Device module for hard disk #0
D608	36	F1	1	r...	6	T1	Device module for 2nd CRT
D63E	216	E1	1	r...	1	WD1000	Device driver for hard disk
D854	CA	C1	1	r...	1	CLOCK	Device driver for 60Hz line clock
D91E	472	11	1	r...	2	Shell	Unix-like user interface (CLI)
DD90	2E	11	1	r...		Load	Utility to get module from disk
DDBE	48	11	1	r...		Unlink	Utility to remove module from mem.
AC00	1DA	11	1	r...	1	Mdir	Utility producing this report

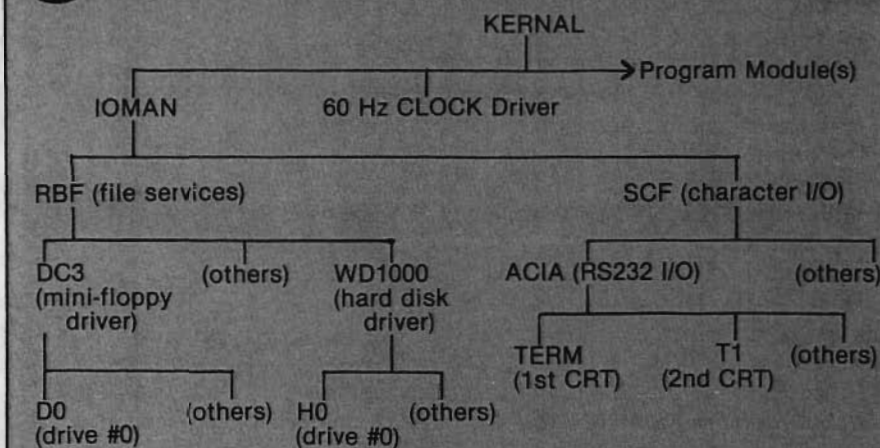


Figure 2 Major OS-9 Modules

which are, in turn, subordinate to IOMAN. In keeping with the module concept, device drivers and their device modules (e.g., WD1000 and H0) are loadable from disk. Thus, to add another disk drive, one merely prepares a new device module (a 5-minute job). To add a new type of peripheral, you merely write a new device driver (actually, paraphrase a similar old one), a one-day task. Note that these new modules do not affect the code within the existing modules in any manner whatsoever. Note also the small size of the peripheral drivers, which hints at their simplicity. Score one for the modular I/O goals in the wish list.

Now look at these modules from their kinship perspective rather than from the memory-map view (see figure 2). From this view these modules' functions are:

**KERNAL** — allocates and manages memory, time shares CPU among programs, coordinates inter-program signals, accepts and hands off jobs to appropriate I/O chiefs.

**CLOCK** — handles 60-per-second (power line) clock interrupts and keeps time of day and time-sharing slice intervals.

**IOMAN** — responsible for *all* requests for I/O, regardless of device. Interfaces programs in a uniform way to the various classes of I/O.

**RBF** — I/O control of random block-oriented devices such as disks. Takes care of directories, files, media allocation, etc. Calls upon various device drivers for physical I/O. Knows nothing about tracks or sectors; works with 32-bit "logical" block numbers.

**SCF** — I/O control of sequential character-oriented devices like CRTs,

which are, to the user programs, files that may be read or written exactly as RBF (disk) files (except for lack of random access). Knows nothing of the device characteristics, leaving that to a subordinate driver such as ACIA.

**DC3 and WD1000** — Device drivers for specific hardware. Converts RBF's logical block number to track, sector, cylinder, or whatever is appropriate for the device. Talks to the device's I/O registers using either polled or interrupt-driven methods. Knows nothing of file structures. Declares that RBF manages I/O for the driver.

**D0** — A device (descriptor) module for a mini-floppy. Supplies details of device; e.g., I/O register locations, number of tracks, sectors per track, drive number, seek time, double/single density/sided, etc. Contains data only, no code. D0 is the name programs use to refer to the peripheral for I/O activities on files on that device. This module states that its device is handled by the driver named DC3.

**H0** — Identical to D0, except values unique to the hard disk. Defines WD1000 as the driver for device H0.

**ACIA** — Driver for RS-232 UART peripherals. Handles the characters from/to serial channels. Buffers incoming data for type-ahead. Buffers outgoing data to allow calling program to get on with concurrent work. Allows editing of typos, recall of last line entered, etc. Using device modules, it adapts to the terminal for upper/lower case, auto-line feed, nulls, etc. Declares that SCF manages the I/O for the driver.

**TERM and T1** — Like D0 and H0, these device descriptor modules define the driver name for the TERM and T1 peripherals (CRTs) as ACIA, and the terminals' unique needs.

To perform I/O to a certain device, a program (in some language) says in effect: "READ from D0" or "WRITE to TERM" or whatever. If, for example, the desired device is H0 (the hard disk) the KERNAL catches the program's request and, since it is I/O, calls upon IOMAN. This module then looks for the device name (H0) in the module directory and finds the name of the driver (WD1000) within the H0 module. Within the WD1000 module is the name of the driver, RBF. Then IOMAN merely sends the programs I/O desires to the I/O chief, RBF, along with the addresses of the driver (WD1000) and device (H0) modules. From here, RBF takes care of the rest, with help from the driver WD1000.

Although it's not obvious, this maze-running has one simple advantage. The user's program requested I/O to some device H0, and OS-9 figured out that H0 with WD1000 and RBF could do the job. The beauty of the scheme is that the system handled the device I/O despite the fact that the device "H0" was unknown at the time the main system was written, assembled, and configured (and no "hacking and patching" was done). Indeed, WD1000 and H0 were merely loaded into memory just after booting from the floppy. The same is true for T1, the second CRT and, though not shown, for a printer attached as device "P", managed by ACIA and SCF. Clearly, more printers, say P1, or more CRTs, say T2, or more disks, say D1 or H1 or X8580 may be added without affecting the rest of the system in any way whatsoever. Remember, these modules are just small pieces of data or code loaded from some disk into memory whenever a peripheral is added. Indeed, the printer module P is loaded only when that printer is being used!


*This concludes part 1. See the July issue of MICRO for part 2.*

---

Steve Childress has been involved with mini and micro systems for over 15 years. He developed a discrete logic microcomputer using shift-register memory and an IBM output writer for I/O in the days of the \$300 8008 chip. Recently, he has contributed to the Apple II adaptation of the OS-9 system. You may contact him at 31220 La Baya Dr., Suite 110, Westlake Village, CA 91362.

---

# COMPILE ATARI BASIC AND FLY!



With ABC™, Monarch's new BASIC compiler for ATARI 400 and 800, you develop and debug programs using your ATARI BASIC cartridge, then use ABC to transform them into compact code that runs up to 12 times faster, without the cartridge (and protects your source code, too). 40K and disk required. For your ABC diskette and manual, send check or money order for \$69.95 (or \$9.95 for manual alone).

**Monarch Data Systems**

P.O. Box 207, Cochituate MA 01778, (617) 877-3457.

Mastercard/Visa by phone. Dealer inquiries invited. Mass. residents add 5% sales tax. ATARI, ATARI 400, and ATARI 800 are trademarks of ATARI, Inc.

Circle No. 33

## Learn to program the ATARI™ in 6502 Machine Language & BASIC.

Three new ATARI books for the serious programmer and beginner, are now distributed by IJG, for use with the ATARI 400 and 800 microcomputer systems.

**ATARI BASIC, Learn to Use.** This is an action book. You program with it more than you read it. You discover with it why you learn ATARI BASIC. Includes a short source code listing. Teacher edition \$12.95. ISBN 0-911682-04-3 \$7.95.

**Games For The ATARI.** Provides ideas on how to create your own computer games. Contains primarily BASIC examples but for your advanced programmers, a machine language example is included at the end of the book. 118 pages. ISBN 0-911682-04-3 \$7.95.

**How to Program Your ATARI in 6502 Machine Language.** To teach the

novice computer user machine language, the use of an assembler and how to call subroutines. ISBN 0-911682-04-3 \$9.95.

IJG products are not available from your local dealer, order direct. Include \$4.00 for shipping and handling per item. Foreign residents add \$11.00 plus purchase price per item. U.S. funds only please.

IJG, Inc. 1953 W. 11th Street Upland, California 91786 Phone: 714/946-5805

**If it's from IJG IT'S JUST GREAT!**

ATARI™ Warner Communications, Inc.

Circle No. 34

# DISK MANAGER

A superb disk utility giving you ease of control over your disk files.

FEATURES INCLUDE:

- DOS Commands (load, run, lock, rename, etc.).
- May be used as Hello program.
- Restore a deleted file.
- Sort catalog files with optional write to disk.
- Copier program copies files and selected tracks.
- Increase disk storage capacity by freeing unused sectors - including the 36th track.\*
- Commands executed with only a few keystrokes.
- Fully documented.

**\$27.50**

\*Some drives cannot use the 36th track.



**\$25.00**

## BIBLE MOUNTAIN

A fun and exciting Bible educational game!

- For 2 to 20 players.
- Fully documented

SEND CHECK OR MONEY ORDER TO:

## J&M SOFTWARE

P.O. Box 2132  
Athens, Texas 75751  
(214) 675-8479

(Texas residents add 5% Sales tax.)  
(Add \$1.50 for shipping and handling charges.)  
Programs for 48K APPLE II\* and D O S 3.3 with disk drive  
\*APPLE is a registered trademark of Apple Computer, Inc.

Circle No. 35

# MACHINE LANGUAGE UTILITIES

for ATARI 400/800/1200.



Vervan utility programs require no software modifications and are a must for all serious ATARI BASIC programmers.

**CASOUP 1.0 & 2.0** To copy most BOOT tapes and cassette data files. 1.0 is a file copier. 2.0 is a sector copier. Cassette only \$24.95

**CASDIS** To transfer most BOOT tapes and cassette data files to disk. Disk only \$24.95

**FULMAP BASIC Utility Package.** VMAP-variable cross-reference, CMAP-constant cross-reference (includes indirect address references), LMAP-line number cross-reference, FMAP-all of the above. Will list "unlistable" programs. Also works with Editor/Assembler cartridge to allow editing of string packed machine language subroutines. All outputs may be dumped to printer. Cassette or Disk \$39.95

**DISASM** To disassemble machine language programs. Works with or without Editor/Assembler

cartridge. May be used to up or down load single boot files. All output can be dumped to printer. Cassette or Disk \$24.95

**DISDUP** For disk sector information copying. May specify single sector, range of sectors, or all. Copies may be made without read verify. Disk \$24.95

IJG products are available at computer stores, B. Dalton Booksellers and independent dealers around the world. If IJG products are not available from your local dealer, order direct. Include \$4.00 for shipping and handling per item. Foreign residents add \$11.00 plus purchase price per item. U.S. funds only please.

IJG, Inc. 1953 W. 11th Street Upland, California 91786 Phone: 714/946-5805

**If it's from IJG IT'S JUST GREAT!**


ATARI™ Warner Communications, Inc.

Circle No. 36

# COM-STAR F/T

Tractor  
Friction  
Printer

only **\$299**

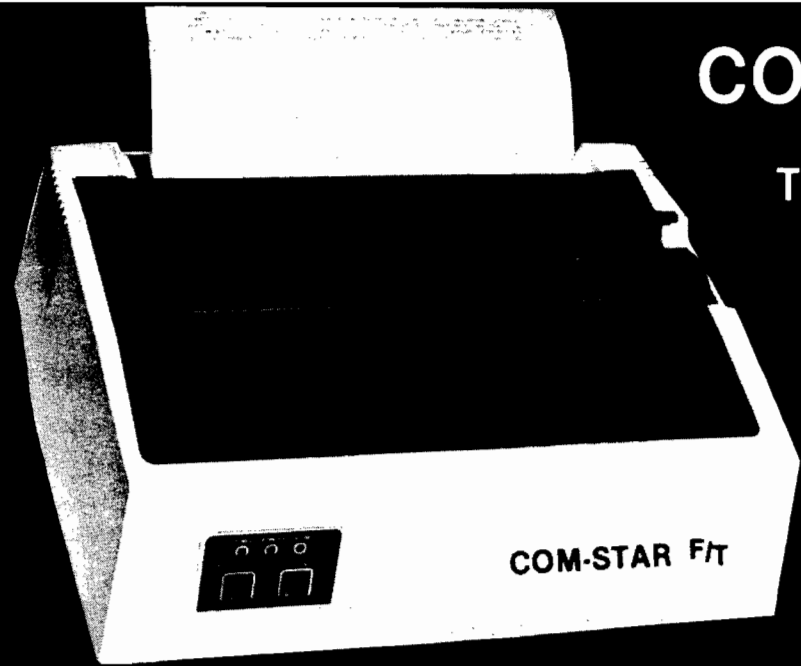

**FREE**  
Box of printer paper and  
demo tape with purchase.

- Lowest price quality tractor friction printer in the U.S.A. • Fast 80 characters per second
- 40, 46, 66, 80, 96, or 132 characters per line spacing • Prints labels, letters, graphs, and tables
- List your programs • Print out data from modem services

## Deluxe COMSTAR F/T PRINTER — \$299.00

The Comstar is an excellent addition to any micro-computer system. (Interfaces are available for Apple, VIC-20, Commodore-64, Pet, Atari 400 and 800, and Hewlett Packard) At only \$299, the Comstar gives you print quality and features found only on printers costing twice as much. Compare these features.

• **BI-DIRECTIONAL PRINTING** with a LOGIC SEEKING CARRIAGE CONTROL for higher through-put in actual text printing. 80 characters per second.

• **PRINTING VERSATILITY:** standard 96 ASCII character set plus block graphics and international scripts. An EPROM character generator includes up to 224 characters.

• **INTERFACE FLEXIBILITY:** Centronics is standard. Options include EIA RS232C, 20mA Current Loop. (Add \$20.00 for RS232)

• **LONG LIFE PRINT HEAD:** 100 million character life expectancy.

• **THREE SELECTABLE CHARACTER PITCHES:** • 10, 12 or 16.5 characters per inch. 132 columns maximum. Double-width font also is standard for each character pitch.

• **THREE SELECTABLE LINE SPACINGS:** 6, 8 or 12 lines per inch.

• **PROGRAMMABLE LINE FEED:** programmable length from 1/144 to 255/144 inches.

• **VERTICAL FORMAT CONTROL:** programmable form length up to 127 lines, useful for short or over-sized preprinted forms.

• **FRICTION AND TRACTOR FEED:** will accept single sheet paper.

• **224 TOTAL CHARACTERS**

• **USES STANDARD SIZE PAPER**

If you want more try —

## Premium Quality COMSTAR F/T SUPER-10" PRINTER — \$389.00

More Features Than MX-80  
For \$250 Less

For \$389.00 you get all of the features of the Comstar plus 10" carriage, 100 cps, 9 x 9 dot matrix with double strike capability for 18 x 18 dotmatrix. High resolution bit image (120 x 144 dot matrix), underlining, backspacing, 2.3K buffer, left and right margin settings, true lower descenders, with super and subscripts, and prints standard, Italic, Block Graphics, special characters, plus 2K of user definable characters. For the ultimate in price performance the Comstar F/T Super 10" leads the pack!

### 80 COLUMN PRINTER \$199

Super silent operation, 60 CPS, prints Hi-resolution graphics and block graphics, expanded character set, exceptionally clear characters, fantastic print quality, uses inexpensive thermal roll paper!

## Double Immediate Replacement Warranty

We have doubled the normal 90 day warranty to 180 days. Therefore if your printer fails within "180 days" from the date of purchase you simply send your printer to us via United Parcel Service, prepaid. We will IMMEDIATELY send you a replacement printer at no charge via United Parcel Service, prepaid. This warranty, once again, proves that WE LOVE OUR CUSTOMERS!

## 15 DAY FREE TRIAL OTHER OPTIONS

Extra Ribbons ..... \$ 5.95  
Roll Paper Holder ..... 32.95  
Roll Paper ..... 4.95  
5000 Labels ..... 19.95  
1100 Sheets Fan Fold Paper ..... 13.95

Add \$20.00 shipping, handling and insurance. Illinois residents please add 6% tax. Add \$40.00 for CANADA, PUERTO RICO, HAWAII, ALASKA orders. WE DO NOT EXPORT TO OTHER COUNTRIES. Enclose cashiers check, money order or personal check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail available!! Canada orders must be in U.S. dollars.

**PROTECTO**  
**ENTERPRIZES** (FACTORY-DIRECT)  
BOX 550, BARRINGTON, ILLINOIS 60010  
Phone 312/382-5244 to order

### COMSTAR F/T

ABCDEFGHIJKLMN O P Q R S T U V W X Y Z a b c d e f g h i j k  
l m n o p q r s t u v w x y z 1 2 3 4 5 6 7 8 9 0  
ABCDEFGHIJKLMN O P Q R S T U V W X Y Z a b c d e f g h i j k l m n o p q r s t u v w x y z 1 2 3 4 5 6 7 8 9 0

### SUPER-10"

ABCDEFGHIJKLMN O P Q R S T U V W X Y Z  
ABCDEFGHIJKLMN O P Q R S T U V W X Y Z 1 2 3 4 5 6 7 8 9 0

# Operating System Commands

## Color Computer DOS

### Disk Operating Commands :

Disk directory index DIR <dn>  
 File copy COPY <file spec1> TO <file spec2>  
 Disk copy BACKUP <d1> [TO <d2>]  
 Assign I/O buffers OPEN "<mode>",<buff>,"<file spec>",<reclen>  
 Delete disk file KILL "<file spec>"  
 Execute binary file EXEC (File must be in memory)  
 Load file into memory LOADM "<file spec>"[,<offsetadr>]  
 Merge file into memory file MERGE "<file spec>"[,R]  
 Take input from disk file DSKI\$ <dn>,<trk>,<sec>,<str1>,<str2>  
 Output disk file in ASCII DSKO\$ <dn>,<trk>,<sec>,<str1>,<str2>  
 Format disk DSKINI<dn>  
 Rename disk file RENAME "<file spec1>" TO "<file spec2>"  
 Close open files UNLOAD [dn]  
 Save memory to disk file SAVEM "<file spec>",<strtadr>,<endadr>,<execadr>  
 Error-check on disk writes VERIFY [ON or OFF]  
 Select default drive DRIVE <dn>

### BASIC Commands :

Open new sequential file OPEN "I",<buff>,<file spec>,<reclen>  
 Open old sequential file Same  
 Open random array file OPEN "D",<buff>,<file spec>,<reclen>  
 Close file channel(s) CLOSE #<buff>[,<buff# list>]  
 Delete disk file KILL "<file spec>"  
 Rename disk file RENAME "<file spec1>" TO "<file spec2>"  
 Display free space on disk PRINT FREE(<dn>)  
 Write to sequential file PRINT #<buff>,<data>  
 WRITE #<buff>,<data>  
 Read from sequential file INPUT #<buff>,<data>  
 LINE INPUT #<buff>,<data>  
 Write to random record file PUT #<buff>[,<reclen>]  
 Read from random record file GET #<buff>[,<reclen>]  
 Save a program on disk SAVE "<file spec>"[,A]  
 Load a program from disk LOAD "<file spec>"  
 Execute a BASIC program RUN "<file spec>"[,R]  
 from disk LOAD "<file spec>",<R>  
 MERGE "<file spec>",<R>

## OS-65D

### Disk Operating Commands :

Disk sector directory DIR <tt> (tt=00-76)  
 List disk directory RUN "DIR"  
 Create new file RUN "CREATE"  
 Delete disk file RUN "DELETE"  
 Rename disk file RUN "RENAME"  
 Copy disk or disk files RUN "COPIER"  
 Copy data files RUN "DATRAN"  
 Compare disks or files RUN "COMPAR"  
 Sort records in a disk file RUN "GOSORT"  
 Pack files to front of disk RUN "REPACK"  
 Fill a file with nulls RUN "ZERO"  
 File copy LOAD <file spec1>,<PUT <file spec2>  
 Assign I/O buffers RUN "CHANGE"  
 Load file LOAD <file spec>  
 Execute binary file CA <adr>=<trk>,<sec>,<GO <adr>  
 Execute binary file in XQT <file spec>  
 BASIC workspace  
 Load file into memory CA <adr>=<trk>,<sec>  
 Load track into memory EXAM <adr>=<tt>  
 Take input from disk file INPUT #<6 or 7>  
 Format disk INIT  
 Format single track INIT <tt>  
 Send output to disk file PRINT #<6 or 7>  
 Save memory to disk file SA <trk>,<sec>=<adr>/<sec>=<adr>/<pages>

Save BASIC Workspace PUT <file spec>  
 Error-check on disk writes Default  
 Select disk drive SE <dev>  
 Direct output to I/O channel IO,<channel no>  
 Direct input to I/O channel IO <channel no>

### BASIC Commands :

Open new sequential file DISK OPEN,<dev>,<file spec>  
 Open old sequential file Same  
 Open random array file DISK OPEN,6,<file spec>  
 Close file channel DISK CLOSE <6 or 7>  
 Append disk files DISK!"LO <file spec1>",<LIST[,]>  
 DISK!"LO <file spec2>",<CTRL-X>  
 Write to sequential file PRINT #<dev>,<data>  
 Read from sequential file INPUT #<dev>,<var>  
 Find string in seq'tial file FIND "<string>"  
 Write to random record file DISK GET <rec>,<PRINT #6,<var>  
 Read from random record file DISK GET <rec>,<INPUT #6,<var>  
 Save a program on disk DISK!"PUT <file spec>"  
 Load a program from disk DISK!"LOAD <file spec>"  
 Send control to new program RUN "<file spec>"  
 Execute a BASIC program RUN "<file spec>"  
 from disk

## APPLE DOS

### Disk Operating Commands :

Disk directory index CATALOG  
 File copy BRUN FID  
 Disk copy RUN COPYA  
 Assign I/O buffers MAXFILES <x> (default 3)  
 Delete disk file DELETE <file spec>  
 Execute disk-input command EXEC <file spec>  
 Execute binary file BRUN <file spec>[,A[\$]<adr>]  
 Load file into memory BLOAD <file spec>[,A[\$]<adr>]  
 Format disk INIT <file spec>  
 Protect disk files LOCK <file spec>  
 Unprotect disk files UNLOCK <file spec>  
 Rename disk file RENAME <file spec>  
 Save memory to disk file BSAVE <file spec>,<A[\$]<adr>,<L[\$]<len>  
 Error-check on disk writes VERIFY <file spec>  
 Monitor I/O channel MON [C,I,O]  
 Turn off Monitor NOMON [C,I,O]  
 Direct output to I/O channel PR#<x>  
 Direct input to I/O channel IN#<x>

### BASIC Commands :

Open new sequential file PRINT CHR\$(4)"OPEN <file spec>"  
 Open old sequential file Same

Open random record file PRINT CHR\$(4)"OPEN <file spec>,<L<len>"  
 Close file channel PRINT CHR\$(4)"CLOSE [<file spec>]"  
 Send control to new program PRINT CHR\$(4)"RUN <file spec>"  
 Send control to new program PRINT CHR\$(4)"BLOAD CHAIN,A520"  
 saving variables CALL 520"<file spec>"  
 Delete disk file PRINT CHR\$(4)"DELETE <file spec>"  
 Rename disk file PRINT CHR\$(4)"RENAME <file spec1>,<file spec 2>"  
 Write to sequential file PRINT CHR\$(4)"WRITE <file spec>"  
 PRINT <data>  
 Write to the end of sequential file PRINT CHR\$(4)"APPEND <file spec>"  
 PRINT <data>  
 Read from sequential file PRINT CHR\$(4)"READ <file spec>"  
 INPUT [or GET] <data>  
 PRINT CHR\$(4)"POSITION <file spec>,<R<x>"  
 Read from a specific point in a sequential file  
 Write to random record file PRINT CHR\$(4)"WRITE <file spec>,<R<x>"  
 PRINT <data>  
 Read from random record file PRINT CHR\$(4)"READ <file spec>,<R<x>"  
 INPUT [or GET] <data>  
 Save a program on disk SAVE <file spec>  
 Load a program from disk LOAD <file spec>  
 Execute a BASIC program RUN <file spec>  
 from disk



# Operating System Commands

## 6809 FLEX

### Disk Operating Commands :

Assign system & work drives ASN [W=<drv>][,S=<drv>]  
 Append disk files APPEND <file spec>[,<file list>],<file spec>  
 Create new text file BUILD <file spec>  
 Disk directory index CAT [<drv list>][,<match list>]  
 File copy COPY <file spec>,<file spec>  
 COPY <file spec>,<drv>  
 COPY <drv>,<drv>[,<match list>]  
 Delete disk file DELETE <file spec>[,<file list>]  
 Execute disk-input command EXEC <file spec>  
 Execute binary file <file spec>[.CMD] (default)  
 Load file into memory GET <file spec>[,<file list>]  
 Take input from disk file I,<file spec>,<command>  
 Output disk file LIST <file spec>[,<line range>]  
 [,+N(or P)]  
 Format disk NEWDISK <drv>  
 Send output to disk file O,<file spec>,<command>  
 Protect disk files PROT <file spec>[,<opts>]  
 Rename disk file RENAME <file spec1>,<file spec2>  
 Save memory to disk file SAVE <file spec>,<begadr>,<endadr>[,<transadr>]  
 Error-check on disk writes VERIFY [,ON (or OFF)]  
 Check disk file version VERSION <file spec>  
 Direct output to printer P,<command>  
 Install new boot program LINK <file spec>

### BASIC Commands :

Open new sequential file OPEN NEW "<file spec>" AS <I/O Channel>  
 Open old sequential file OPEN OLD "<file spec>" AS <I/O Channel>  
 Open random array file OPEN [NEW or OLD] "<file spec>" AS <I/O Channel> DIM #<I/O Channel>,v[\$](<x>)[=<length>]  
 Open random record file OPEN "<file spec>" AS <I/O Channel> FIELD #<I/O channel>,<len> AS <v\$>[,<fieldst>]  
 Close file channel CLOSE <I/O channel>  
 Send control to new program CHAIN "<file spec>" 'X(|)"(default)  
 Delete disk file KILL "<file spec>"  
 Rename disk file RENAME "<file spec1>",<file spec2>"  
 Write to sequential file PRINT #<I/O channel>[,USING <v\$>],<data>  
 Read from sequential file INPUT #<I/O channel>[,USING <v\$>],<data>  
 Write to random record file PUT #<I/O channel>[,RECORD <x>]  
 Read from random record file GET #<I/O channel>[,RECORD <x>]  
 Save a program on disk SAVE "<file spec>" [.BAS] (default)  
 Load a program from disk LOAD "<file spec>" [.BAS] (default)  
 Execute a BASIC program RUN "<file spec>" [.BAC] (default) from disk  
 Compile a Basic program COMPILE "<file spec>" [.BAC] (default)

## OS-9

### Disk Operating Commands :

Append disk files MERGE <path>[<path>]  
 Create new text file BUILD <path>  
 Create a new directory MAKDIR <path>  
 Disk directory index DIR [e][<path>]  
 Module directory index MDIR [e]  
 Change working data dir CHD <pathlist>  
 Change working exec dir CHX <pathlist>  
 File copy COPY <path> <path>  
 Delete disk file DELETE <path>[<path>]  
 Execute binary file EX <modname>[<modifiers>]  
 [<parameters>]  
 Load file into memory LOAD <path>  
 Output disk file in ASCII LIST <path>[<path>]  
 Output disk file in Hex DUMP <path>[<path>]  
 Format disk FORMAT <devname>[<opts>]  
 Protect disk files ATTR <path>[<opts>]  
 Unprotect disk files Same  
 Rename disk file RENAME <path> <newname>  
 Save memory to disk file SAVE <modname>[<modname>]  
 Error-check on disk writes VERIFY [U]  
 Install current boot program COBBLER /<devname>  
 Install new boot program OS9GEN /<devname>  
 Echo input to output path ECHO <text>  
 Free space remaining FREE <devname>  
 Log user onto system LOGIN  
 Abort process KILL <procID>  
 Display procedures & status PROCS [e]  
 Set process priorities SETPR <procID> <number>  
 Display memory free MFREE [e]

Free memory module UNLINK <modname>[<modname>]  
 Print errors in English PRINTERR  
 Time share monitor TSMON [<pathlist>]

### BASIC Commands :

Open new file CREATE #<I/O Channel>,<name>[:<access mode>]  
 Open old sequential file and old random file OPEN #<I/O Channel>,<name>[:<access mode>]  
 Close file channel CLOSE #<I/O Channel>[,<I/O Channel>]  
 Send control to new program CHAIN <filename>  
 Delete disk file DELETE <filename>  
 Rename disk file RENAME <procname>,<newprocname>  
 Write to sequential file WRITE #<I/O Channel>,<data>  
 Read from sequential file READ #<I/O Channel>,<data>  
 Read from a specific point in a sequential file SEEK #<I/O Channel>,<expr>  
 Write to random record file SEEK #<I/O Channel>,<expr> PUT #<I/O Channel>,<data struc>  
 Read from random record file SEEK #<I/O Channel>,<expr> GET #<I/O Channel>,<data struc>  
 Save a program on disk SAVE [<procname>][,<procname>]  
 Load a program from disk LOAD <pathlist>  
 Execute a BASIC program RUN [<procname>][<erpr>[,<expr>]]  
 Compile a BASIC program PACK [<procname>][,<procname>]

## ORCA/M

### Disk Operating Commands :

Append disk files APPEND <file spec>  
 Create new text file NEW  
 Edit old file EDIT  
 Disk directory index CATALOG  
 Disk sector read PEEK  
 File copy COPY  
 Delete disk file DELETE <file spec>  
 Execute binary file BRUN <file spec>  
 Load file into memory LOAD <file spec>  
 Protect disk files LOCK <file spec>  
 Unprotect disk files UNLOCK <file spec>  
 Rename disk file RENAME <file spec1>,<file spec2>  
 Save memory to disk file SAVE [<file spec>] any command [,S<s>,D<d>] (default)  
 Select disk drive any command [,V<v>] (default on CATALOG)  
 Select default drive (default on CATALOG)  
 Select volume ESCape  
 Free space remaining  
 Abort process  
 Display memory free FREE  
 Check disk file version EXPAND  
 Reset version number RESET  
 Print file in memory PRINT  
 Set printer left margin MARGIN <x>  
 Boot new disk DOS [<s>]  
 Compile file COMPILE [<opts>]  
 Assemble file ASSEMBLE [<opts>]  
 Disk bad sector check CHECK  
 Alphabetize catalog COMPRESS A  
 Compress catalog COMPRESS C  
 Set disk volume number VOLUME <v>  
 Restore deleted file RESTORE <file spec>  
 Assemble, Link and Execute RUN <file spec>  
 Change catalog order SWITCH <file spec1>,<file spec2>  
 Set tab stops TAB  
 Print current time TIME

# Operating System Commands

## Pascal

### Disk Operating Commands :

Create new text file	E(edit	Check for bad disk blocks	F(iler B)ad block scan
Disk directory index	F(iler L(ist or E(xtended list	Compile a PASCAL program	C(ompile
Volume directory index	F(iler V(olumes		
Zero directory index	F(iler Z(ero dir		
File copy	F(iler T(ransfer		
Disk copy	F(iler T(ransfer		
Delete disk file	F(iler R(emove		
Make EXEC file	M(ake exec		
Delete disk file	F(iler D(elete		
Rename disk file	F(iler C(hange		
Pack files to front of disk	F(iler K(runch		
Format disk	X(ecute FORMATTER		
Save a program on disk	F(iler S(ave		
Load a program from disk	F(iler G(et		
Execute a PASCAL program from disk	X(ecute		
Abort process	CTRL-@		

### Pascal Commands :

Open new file	REWRITE(<id>,<file spec>)
Open old file	RESET(<id>[,<file spec>])
Close file channel(s)	CLOSE(<id>[,<opts>])
Write to sequential file	WRITE([<id>,<data>])
	WRITELN([<id>,<data>])
Read from sequential file	READLN([<id>,<data>])
Write to random record file	SEEK(<id>,<r>)
	PUT(<id>)
Read from random record file	SEEK(<id>,<r>)
	GET(<id>)
Load block into memory	UNITREAD(<v>,<array>,<l>[,<block>,<mode>])
Save block to disk	UNITWRITE(<v>,<array>,<l>[,<block>,<mode>])

## PET BASIC 4 and \*BASIC 1 and 2

### Disk Operating Commands :

Append disk files	CONCAT [D<drive>,<file spec>]TO[D<drive>,<file spec>][ON U<dev>]
Disk directory index	DIR[ECTORY][D<drive>][ON U<dev>]
File copy	*LOAD "\$<drive>[:<file spec>]",<dev>]
Disk copy	COPY [D<drive>][<file spec1>]TO[D<drive>][<file spec2>][ON U<dev>]
Delete disk file	BACKUP D<drive> TO D<drive>[ON U<dev>]
	*PRINT#<I/O Channel>,"D[uplicate]<drive>=<drive>"
	SCRATCH [D<drive>],<file spec>[ON U<dev>]
	*PRINT#<I/O Channel>,"S<drive>:<file spec>[<drive>:<file spec>]"
Load file into memory	DLOAD "<file spec>"[D<drive>][ON U<dev>]
Format disk	HEADER "<disk name>",<drive>,<v>
	*PRINT#<I/O Channel>,"N<drive>:<disk name>,<v>"
Rename disk file	RENAME [D<drive>,<file spec1>]TO<file spec2>[ON U<dev>]
Close open files	DCLOSE [#<I/O Channel>][ON U<dev>]
	*CLOSE [<I/O Channel>]
Free space remaining	Default on DIRECTORY
Display procedures & status	PRINT DS\$,DS,ST
Direct output to I/O Channel	OPEN <I/O Channel>,<dev>:CMD<I/O Channel>
Update block map	COLLECT [D<drive>][ON U<dev>]
	*PRINT#<I/O Channel>,"V[alidate][D<drive>]
	PRINT#<I/O Channel>,"I[nitialize][D<drive>]

### BASIC Commands :

Open new sequential file	DOPEN#<I/O Channel>,<file spec>[,<drive>][ON U<dev>][,<access>]
Open old sequential file	Same
Open relative record file	*OPEN<I/O Channel>,<dev>,<sa><drive>:<file spec>SEQ[,<access>]
Close file channel(s)	DCLOSE[#<I/O Channel>][ON U<dev>]
	*CLOSE [<I/O Channel>]
Send control to new program	DLOAD "<file spec>"[D<drive>][ON U<dev>]
List disk directory	DIR[ECTORY][D<drive>][ON U<dev>]
Delete disk file	SCRATCH [D<drive>],<file spec>[ON U<dev>]
Rename disk file	RENAME [D<drive>],<file spec1>TO<file spec2>[ON U<dev>]
Copy disk or disk files	COPY [D<drive>,<file spec1>]TO[D<drive>,<file spec2>][ON U<dev>]
Append disk files	APPEND#<I/O Channel>,<file spec>[D<drive>][ON U<dev>]
	*OPEN<I/O Channel>,<dev>,<sa><drive>:<file spec>,"A"
Write to sequential file	PRINT#<I/O Channel>,<data>
Read from sequential file	INPUT#<I/O Channel>,<data>
Write to relative rec file	RECORD#<I/O Channel>,<recno>[,<byteno>]
	PRINT#<I/O Channel>,<data>
Read from relative rec file	RECORD#<I/O Channel>,<recno>[,<byteno>]
	INPUT#<I/O Channel>,<data>
Save a program on disk	DSAVE "<file spec>"[D<drive>][ON U<dev>]
	SAVE "[<drive>:<file spec>",<dev>
Load a program from disk	DLOAD "<file spec>"[D<drive>][ON U<dev>]
	LOAD "[<drive>:<file spec>",<dev>
Load block into memory	PRINT#<I/O Channel>,"BLOCK-READ:<sa>,<drive>,<trk>,<sec>"
Save block to disk	PRINT#<I/O Channel>,"BLOCK-WRITE:<sa>,<drive>,<trk>,<sec>"

# Calibration by Least Squares Polynomials on the Atari

by Mike Dougherty

Homebrew computer sensors are often plagued by calibration problems. The following program allows a set of calibration data points to be fitted with a least squares polynomial, allowing for efficient and compact interpolation of data.

A common problem encountered while building remote sensors for the personal computer is the calibration of these homebrew sensors. In a few cases, the calibration can be computed by a mathematical analysis of the hardware, often tedious and difficult. An easier approach is to take a set of calibration data points and fit a "best" curve through this data. Usually the functional form of the curve is known a priori from the hardware being used and only the parameters of the curve need be determined. LSQPOLY is an Atari 800 BASIC program designed to take a set of calibration data points, perform a polynomial least squares regression upon the calibration data, and visually plot the results. The output of LSQPOLY consists of a set of polynomial coefficients,  $COEF_1$ ,  $COEF_2$ , ...  $COEF_{m+1}$  where  $m$  is the highest degree of the polynomial. A point,  $V$ , within the range of the interpolation is computed by the polynomial evaluation:

$$F(V) = COEF_1 + COEF_2 \times V +$$

$$COEF_3 \times V^2 + \dots + COEF_{m+1} V^m$$

or

$$F(V) = \sum_{i=1}^{m+1} COEF_i \times V_{i-1}$$

The numerical methods used in LSQPOLY have been adapted from *Numerical Methods with Fortran Case Studies* by W.S. Dorn and D.D. McCracken and may be found in most texts on numerical analysis. While the methods used may fit a polynomial of any degree to the calibration data, I chose to limit LSQPOLY to polynomials of the fifth degree or less. From my experience with polynomial approximation, the higher order polynomials fit the calibration data better by "wiggling," instead of finding a

```

1000 REM ----- LSQPOLY -----
1001 REM
1002 REM . by Mike Dougherty
1003 REM
1004 REM
1005 REM FIT A LEAST SQUARE POLYNOMIAL
1006 REM UP TO ORDER 5 THROUGH A SET
1007 REM OF CALIBRATION DATA POINTS.
1008 REM ALLOW THE USER TO GRAPHICALLY
1009 REM JUDGE THE RESULTING LSQ FIT.
1010 REM
1011 REM -----
1012 REM
1013 REM
1050 DIM X(50),Y(50),OPTION$(1),PAUSE$(1)
1060 DIM SUM(10),RIGHT(6),MATRIX(6,7)
1070 DIM COEF(6),YFIT(159)
1090 REM
1091 REM
1092 REM -----
1093 REM
1094 REM -- PRESENT THE LSQPOLY USER
1095 REM -- OPTIONS VIA MENU FORMAT.
1096 REM
1097 REM -----
1098 REM
1099 REM
1100 FOR FOREVER=0 TO 1 STEP 0
1110 GRAPHICS 0
1120 POSITION 3,5:PRINT "Select Option"
1130 POSITION 5,7:PRINT "D - Enter calibration Data"
1140 POSITION 5,8:PRINT "S - Show calibration data"
1150 POSITION 5,9:PRINT "R - Regression up to order 5"
1160 POSITION 5,10:PRINT "C - Print Coefficients"
1170 POSITION 5,11:PRINT "I - Interpolate Y values"
1180 POSITION 5,12:PRINT "G - Generate polynomial plot data"
1190 POSITION 5,13:PRINT "P - Plot polynomial data"
1200 POSITION 18,5
1210 INPUT OPTION$
1310 IF OPTION$="D" THEN GOSUB 2000
1320 IF OPTION$="S" THEN GOSUB 3000
1330 IF OPTION$="R" THEN GOSUB 4000
1340 IF OPTION$="C" THEN GOSUB 5000
1350 IF OPTION$="P" THEN GOSUB 6000
1360 IF OPTION$="I" THEN GOSUB 7000
1370 IF OPTION$="G" THEN GOSUB 8000
1390 NEXT FOREVER
1500 REM
1501 REM
1502 REM -----
1503 REM
1504 REM EACH OPTION IS HANDLED AS A
1505 REM SEPARATE SUBROUTINE, EACH
1506 REM STARTING ON AN EVEN THOUSAND
1507 REM LINE NUMBER.
1508 REM
1509 REM -----
1510 REM
1511 REM
1512 REM
2000 REM
2001 REM -- ENTER THE CALIBRATION DATA.
2002 REM
2110 GRAPHICS 0
2120 PRINT "Number of data points ";
2130 INPUT N
2210 FOR NUMBER=1 TO N
2220 PRINT "X(";NUMBER;") ";:INPUT VALUE:X(NUMBER)=VALUE
2230 PRINT "Y(";NUMBER;") ";:INPUT VALUE:Y(NUMBER)=VALUE
2240 PRINT
2250 NEXT NUMBER
2260 RETURN
3000 REM
3001 REM -- SHOW THE CALIBRATION DATA
3002 REM -- FOR VERIFICATION.
3003 REM
3100 GRAPHICS 0:POKE 752,1

```

(continued)

single smooth curve. As a rule of thumb, I choose the lowest order polynomial that gives a uniformly smooth curve reasonably close to the calibration data.

Instead of computing a numerical measure of error, LSQPOLY allows the user to visually compare the raw calibration data to data generated from the polynomial. In my opinion, this visual comparison allows a more meaningful evaluation of the least squares fit. The object is not to see how close the curve can be bent to pass near each calibration datum, but rather to pick a smooth "best" curve which will represent the functional relationship of the physical quantity being measured.

As a word of caution, LSQPOLY should be used to interpolate only within the range of the calibration data — do not try to extrapolate outside of the calibration data range. When using high order polynomials, a smooth monotonic curve within the limits of the calibration data can rapidly change direction outside of that range. In practice, the calibration data should include points at the extremes of the sensor range to properly "nail down" the curve.

## Numerical Methods

A full discussion of polynomial regression may be found in the Dorn and McCracken text previously cited. As a summary, minimizing the sum of the square of the Y deviation yields the following matrix equation for a fit of  $n$  data points by a polynomial of order  $m$ :

$$[\text{MATRIX}] \times [\text{COEF}] = [\text{RIGHT}]$$

where

$$\text{MATRIX}_{ij} = \begin{cases} n & \text{for } i=j=1 \\ \sum_{k=1}^n X_k^{i+j-2} & \end{cases}$$

$$\text{RIGHT } i = \sum_{k=1}^n X_k^{i-1} \times Y_k$$

Note: LSQPOLY uses the FORTRAN convention of beginning subscripts with 1.

LSQPOLY solves the above matrix equation for the coefficients, COEF, by Gaussian Elimination.

The resulting coefficients,  $COEF_1, \dots, COEF_{m+1}$  are used to interpolate the functional value of any point within the calibration data range. The

polynomial total of a specific abscissa value is:

$$\text{TOTAL} = \sum_{i=1}^{m+1} \text{COEF}_i \times \text{VALUE}^{i-1}$$

This may be evaluated in BASIC by the following methods:

```
TOTAL = COEF(1)
FOR I=2 TO M+1
TOTAL = TOTAL + COEF(I) ×
(VALUE ↑(I-1))
NEXT I
```

-- or --

```
TOTAL = 0
FOR I = M+1 TO 1 STEP -1
TOTAL = TOTAL × VALUE +
COEF(I)
NEXT I
```

The second method, requiring no exponentiation, is Horner's method of polynomial evaluation. This method is particularly suited to small computer use.

As a rule, polynomial regression should be applied to the variable without error. That is, if  $X_i$  is an error free value, but  $Y_i$  contains error due to measurement, then the regression should express  $Y$  in terms of  $X$ :

$$Y = \text{COEF}_1 + \text{COEF}_2 \times X + \dots + \text{COEF}_{m+1} \times X^m$$

This regression allows for the interpolated value of  $Y$  to be computed, given any value of  $X$ . However, for  $M > 1$ , the interpolated value of  $X$  cannot be easily computed, given a value of  $Y$ . In this case, the polynomial regression must be applied on the  $Y$  values, even though they contain measurement errors:

$$X = \text{COEF}_1 + \text{COEF}_2 \times Y + \dots + \text{COEF}_{m+1} \times Y^m$$

If the visual fit is reasonable then the regression should pose no serious problem.

Finally, note that the matrix formed by this method may be quite ill-conditioned and subject to severe numerical errors. Such errors are easily detected by the visual comparison of the fit data and the calibration data. Thus far, no numerical difficulties have been encountered through ordinary use of LSQPOLY.

```
3110 FOR NUMBER=1 TO N
3120 PRINT " X(";NUMBER;"): ";X(NUMBER),
3122 PRINT "Y(";NUMBER;"): ";Y(NUMBER)
3130 NEXT NUMBER
3140 PRINT :PRINT "Press RETURN to continue";
3150 INPUT PAUSE#
3160 RETURN
4000 REM
4001 REM -- PERFORM THE LSQ POLYNOMIAL
4002 REM -- REGRESSION ON THE DATA.
4003 REM
4004 REM -- REFER TO "NUMERICAL METHODS
4005 REM -- WITH FORTRAN CASE STUDIES"
4006 REM -- BY DORN & McCracken
4007 REM
4110 GRAPHICS 0
4120 PRINT "Order of regression ";
4130 INPUT ORDER:IF ORDER>5 THEN RETURN
4150 FOR I=1 TO 2*ORDER
4160 SUM(I)=0
4170 NEXT I
4180 FOR I=1 TO ORDER+1
4190 RIGHT(I)=0
4200 NEXT I
4210 FOR POINT=1 TO N
4220 FOR I=1 TO ORDER*2
4230 SUM(I)=SUM(I)+X(POINT)^I
4240 NEXT I
4250 FOR I=1 TO ORDER+1
4255 IF I=1 THEN RIGHT(I)=RIGHT(I)+Y(POINT)
4260 IF I<>1 THEN RIGHT(I)=RIGHT(I)+Y(POINT)*(X(POINT)^(I-1))
4270 NEXT I
4280 NEXT POINT
4290 MATRIX(1,1)=N
4300 FOR I=1 TO ORDER+1
4310 MATRIX(I,ORDER+2)=RIGHT(I)
4320 FOR J=1 TO ORDER+1
4330 IF I+J<>2 THEN MATRIX(I,J)=SUM(I+J-2)
4340 NEXT J
4350 NEXT I
4410 FOR K=1 TO ORDER
4420 KP1=K+1
4430 L=K
4440 FOR I=KP1 TO ORDER+1
4450 IF ABS(MATRIX(I,K))>ABS(MATRIX(L,K)) THEN L=I
) THEN L=I
4460 NEXT I
4470 IF L=K THEN 4530
4480 FOR J=K TO ORDER+2
4490 TEMP=MATRIX(K,J)
4500 MATRIX(K,J)=MATRIX(L,J)
4510 MATRIX(L,J)=TEMP
4520 NEXT J
4530 FOR I=KP1 TO ORDER+1
4540 FACTOR=MATRIX(I,K)/MATRIX(K,K)
4550 FOR J=KP1 TO ORDER+2
4560 MATRIX(I,J)=MATRIX(I,J)-FACTOR*MATRIX(K,J)
4570 NEXT J
4580 NEXT I
4590 NEXT K
4600 COEF(ORDER+1)=MATRIX(ORDER+1,ORDER+2)/MATRIX(ORDER+1,
ORDER+1)
4610 I=ORDER
4620 IP1=I+1
4630 TOTAL=0
4640 FOR J=IP1 TO ORDER+1
4650 TOTAL=TOTAL+MATRIX(I,J)*COEF(J)
4660 NEXT J
4670 COEF(I)=(MATRIX(I,ORDER+2)-TOTAL)/MATRIX(I,I)
4680 I=I-1
4690 IF I>=1 THEN 4620
4700 RETURN
5000 REM
5001 REM -- DISPLAY THE LSQ POLYNOMIAL
5002 REM -- COEFFICIENTS.
5003 REM
5110 GRAPHICS 0:POKE 752,1
5120 FOR NUMBER=1 TO ORDER+1
5130 PRINT "COEF(";NUMBER;"): ";COEF(NUMBER)
```

(continued)

# A unique experience for those who love a challenge . . . SPITFIRE SIMULATOR...

Fly a 360 mph Spitfire fighter • Pursue and attack 3-D target aircraft • Eight target types (Me 109, Fw 190, etc.) • Scores for targets hit and successful mission completion

- Aerobatic (loops, rolls, stalls, etc.)
- AIRSIM-I pilots: SPITFIRE SIMULATOR can use AIRSIM-I scenery!



\$40.00

Mass. residents add 5% sales tax. Overseas shipping add \$3.00. For Apple II or II+ with 48 K RAM. Applesoft ROM or equivalent. One disk. Game paddles or joystick. See your dealer or contact us directly.

Apple is a Trademark of Apple Computer, Inc.  
AIRSIM is a Trademark of Mind Systems Corporation.



Mind Systems Corporation

P.O. Box 506  
Northampton, MA 01061  
(413) 586-6463

Circle No. 38

## OS9 APPLICATION SOFTWARE

ACCOUNTS  
PAYABLE

**\$299**

GENERAL  
LEDGER  
with  
CASH

**\$399**

PAYROLL

**\$499**

ACCOUNTS  
RECEIVABLE

**\$299**


JOURNAL

SMALL  
BUSINESS  
INVENTORY

**\$299**

COMPLETE DOCUMENTATION \$19.95

OS9 & BASIC 09 ARE TRADEMARK OF  
MICROWARE, INC. & MOTOROLA CORP.



**SPECIALTY  
ELECTRONICS**

(405) 233-5564

2110 W. WILLOW — ENID, OK 73701

Circle No. 39

## —Next Month in MICRO—

### July Features Hardware!

A comparison of all the microcomputers you have questions about:

- Atari 400, 800, and 1200XL
- VIC-20
- Commodore 64
- Apple IIe
- TRS-80 Color Computer
- Commodore 128
- Sinclair/Timex
- TI 99

Also: An Apple Clock Interrupt  
PET Goes ROM  
Pascal Solitaire  
UltraPainter on the Atari  
Interfacing the Atari Joystick to the Color Computer

## Variables in LSQPOLY

The following major variables and arrays are used in LSQPOLY.

N	The number of calibration data points.
X(50)	The abscissa values of the calibration data.
Y(50)	The ordinate values of the calibration data.
ORDER	The highest degree, m, of the polynomial.
MATRIX(6,7)	The intermediate matrix of X values.
RIGHT(6)	The intermediate vector of XY values.
SUM(10)	The intermediate vector of X values used to fill MATRIX for Gaussian Elimination.
COEF(6)	The polynomial coefficients.
XMIN	The minimum abscissa limit for plotting.
XMAX	The maximum abscissa limit for plotting.
YMIN	The minimum ordinate limit for plotting.
YMAX	The maximum ordinate limit for plotting.
XINC	The data frequency of the plot, i.e. every XINCth fit data point will be plotted.
YFIT(159)	The least squares interpolated values between XMIN and XMAX to be plotted.

LSQPOLY allows the homebrew designer to visually analyze calibration data for trends and functional relationships. This tool is capable of generating a compact functional description of the data, allowing easy and accurate interpolation — even if the calibration data contains error.

Although the plot routines are specific to the Atari 800, LSQPOLY should require little modification to execute the numerical routines on other BASIC systems. Computer systems supporting graphics resolutions of 160 x 80 or higher (such as Atari GRAPHICS 7 and 8) will allow LSQPOLY to be used most effectively.

---

Mike Dougherty has an M.S. degree in computer science, and is currently working at Martin Marietta Aerospace in Denver, CO. You may contact him at 7659 W. Fremont Ave., Littleton, CO 80123.

---

```

5140 NEXT NUMBER
5150 PRINT :PRINT "Press RETURN to continue";
5160 INPUT PAUSE$
5170 RETURN
6000 REM
6001 REM -- PLOT THE GENERATED LSQ FIT.
6002 REM
6010 GRAPHICS 0
6020 PRINT "Minimum y ";;INPUT YMIN
6030 PRINT "Maximum y ";;INPUT YMAX
6040 PRINT "Data Frequency ";;INPUT XINC
6050 X RANGE=XMAX-XMIN
6060 Y RANGE=YMAX-YMIN
6070 GRAPHICS 7
6080 SETCOLOR 2,0,0
6100 REM
6101 REM -- PLOT THE CALIBRATION DATA.
6102 REM
6110 COLOR 2
6120 FOR I=1 TO N
6130 IF (X(I)<XMIN) OR (X(I)>XMAX) THEN 6190
6140 IF (Y(I)<YMIN) OR (Y(I)>YMAX) THEN 6190
6150 X PLOT=INT(159*(X(I)-XMIN)/X RANGE)
6160 Y PLOT=79-INT(79*(Y(I)-YMIN)/Y RANGE)
6170 PLOT X PLOT,Y PLOT
6190 NEXT I
6210 PRINT "Press RETURN to continue";
6220 INPUT PAUSE$
6230 REM
6231 REM -- PLOT THE LSQ FIT DATA.
6232 REM
6300 COLOR 1
6310 FOR I=0 TO 159 STEP XINC
6320 IF (YFIT(I)<YMIN) OR (YFIT(I)>YMAX) THEN 6390
6330 Y PLOT=79-INT(79*(YFIT(I)-YMIN)/Y RANGE)
6340 PLOT I,Y PLOT
6390 NEXT I
6900 PRINT "Press RETURN to continue";
6910 INPUT PAUSE$
6920 RETURN
7000 REM
7001 REM -- FORM INTERPOLATION VALUES
7002 REM -- FROM THE LSQ POLYNOMIAL
7003 REM -- COEFFICIENTS. TERMINATE
7004 REM -- WITH AN X VALUE OF -9999.
7005 REM
7110 GRAPHICS 0
7120 PRINT "X (-9999 to RETURN) ";
7130 INPUT VALUE
7140 IF VALUE=-9999 THEN RETURN
7150 GOSUB 7900
7180 PRINT "y: ";TOTAL:PRINT
7190 GOTO 7120
7900 REM
7901 REM -- COMPUTE THE POLYNOMIAL
7902 REM -- TOTAL FROM THE X VALUE.
7903 REM
7910 TOTAL=0
7920 FOR P=ORDER+1 TO 1 STEP -1
7930 TOTAL=TOTAL*VALUE+COEF(P)
7940 NEXT P
7950 RETURN
8000 REM
8001 REM -- GENERATE THE LSQ FIT DATA
8002 REM -- FOR THE VISUAL PLOT.
8003 REM
8010 GRAPHICS 0
8020 PRINT "Minimum x ";;INPUT XMIN
8030 PRINT "Maximum x ";;INPUT XMAX
8040 X INC=(XMAX-XMIN)/160
8050 GRAPHICS 0:POKE 752,1
8100 FOR X OFFSET=0 TO 159
8110 VALUE=XMIN+X OFFSET*X INC
8120 GOSUB 7900
8130 YFIT(X OFFSET)=TOTAL
8135 PRINT " Y(";;VALUE;")=",YFIT(X OFFSET)
8140 NEXT X OFFSET
8150 RETURN

```

MICRO™



# MAROONED!

And you're the quarry  
for the Questers!

You're marooned in a derelict space station trapped between the stars. Waiting for rescue.

But, you may never make it. The deadly space Questers have located you and are ready to attack. Your first line of defense is to close the space ports on A Deck before you're overrun, then use the Teleportation chamber to head them off on the other decks.

As you navigate the lonely corridors . . . turning here, hiding there, attacking or retreating, the swarms of Questers get faster and smarter!

There's no other game like Spectre. Deck after deck, you'll find the most challenging and original 3-D maze action ever!

Get SPECTRE now, only \$29.95 for the Apple II\* at your computer store, or



8943 Fullbright Ave.,  
Chatsworth, CA 91311 (213) 709-1202

VISA/MASTERCARD accepted. \$2.00 shipping handling charge. (California residents add 6 1/2% sales tax)

\*Apple II is a trademark of Apple Computer, Inc.



As anyone who has been a Cub Scout or the father of a Cub Scout can testify, the high point of the scouting year is the pack meeting. A while later, the Pinewood Derby is held. This is a model car race in which 1-inch-high wooden cars roll down an inclined track while 40 or so 8- to 10-year-olds and their parents shout encouragement.

I quickly discovered how competitive the racing participants are when I helped judge a Pinewood Derby three years ago. Our Cub Scout pack's track is a four-lane affair in which the cars race simultaneously. It required two judges with keen eyesight and a superb sense of timing to determine the winner. The following year I installed an electronic judging and time-keeping system using my AIM 65 computer and four optosensors.

With the computer judging in place we found the Pinewood Derby ran much smoother and faster, and there were fewer upset fathers and frazzled judges. The computer selects the first, second-, third- and fourth-place finishers and gives each car's time to 1/1000 of a second.

#### The Set-up

The Pinewood Derby track consists of two parts. The initial 8 feet of track are inclined at about 30 degrees to the horizontal. This is followed by 20 feet of horizontal run to the finish line. The cars cover the entire length of track in about 2.5 seconds (don't blink!). The

track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.


The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.


The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

The track is 10 inches wide and has 2 1/2-inch-wide lanes. Each lane is 1/2 inch wide at the center. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track. The track is 1/8 inch high at the center of each lane to keep the cars from jumping the track.

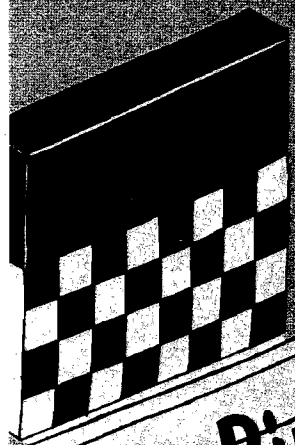

# Pinewood Derby with Computer Timing

by Sidney S. Koegler

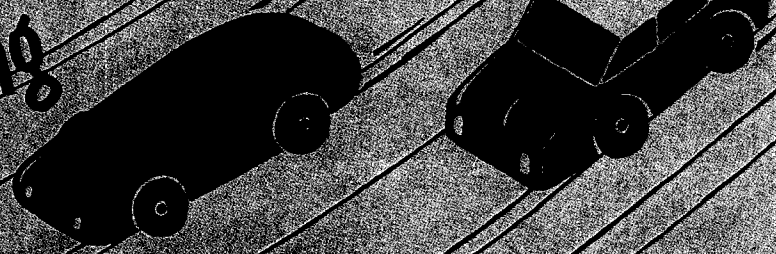

# Richvale Telecommunications

10610 BAYVIEW (Bayview Plaza)  
 RICHMOND HILL, ONTARIO, CANADA L4C 3N8  
 (416) 884-4165

**\$185<sup>00</sup> Canadian**  
**\$149<sup>00</sup> U.S.**  
 PLUS CUSTOMS BROKERAGE,  
 HANDLING AND MAILING CHARGE.


Also available  
 for VIC 20

## C64-LINK<sup>®</sup> The Smart 64

RTC

RTC

Call or write  
 payments  
 by VISA,  
 MASTERCARD  
 or BANK  
 TRANSFER.  
 Mail orders  
 also by  
 certified  
 check, etc.

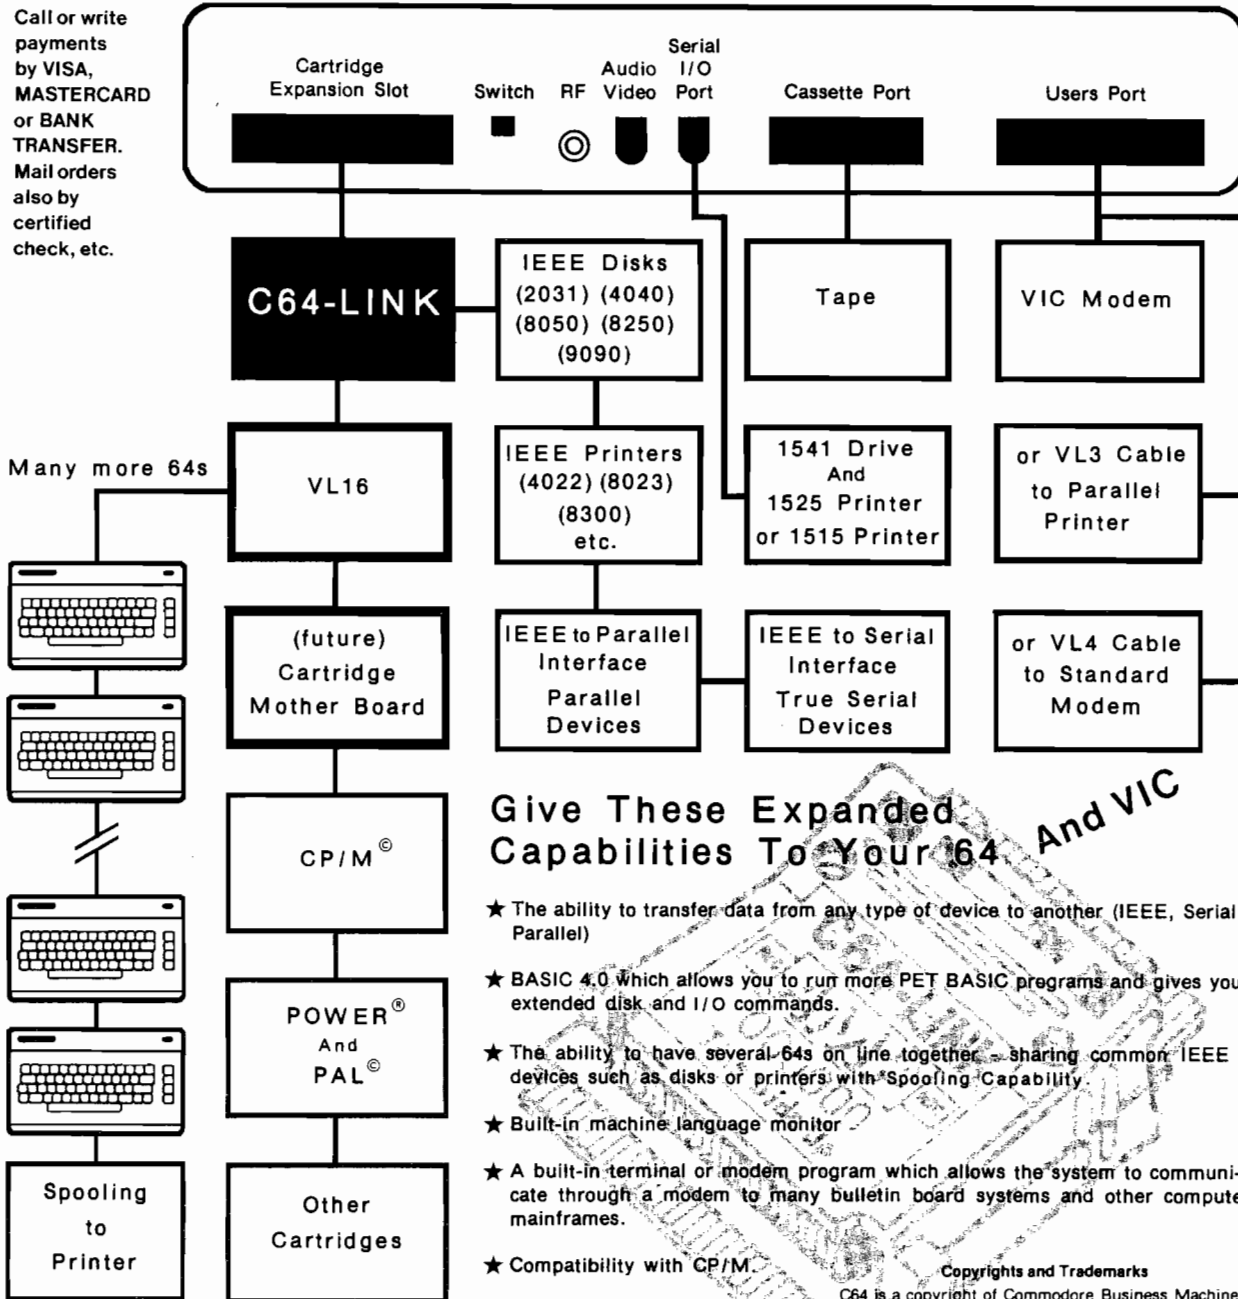

### Give These Expanded Capabilities To Your 64 And VIC

- ★ The ability to transfer data from any type of device to another (IEEE, Serial, Parallel)
- ★ BASIC 4.0 which allows you to run more PET BASIC programs and gives you extended disk and I/O commands.
- ★ The ability to have several 64s on line together, sharing common IEEE devices such as disks or printers with "Spooling" Capability.
- ★ Built-in machine language monitor
- ★ A built-in terminal or modem program which allows the system to communicate through a modem to many bulletin board systems and other computer mainframes.
- ★ Compatibility with CP/M.

#### Copyrights and Trademarks

C64 is a copyright of Commodore Business Machines, Inc. C64-LINK is a copyright of Richvale Telecommunications. CP/M is a registered trademark of Digital Research. POWER is a trademark of Professional Software. PAL is a copyright of Brad Templeton.

Contact your local Commodore dealer or RTC.

- has been counted previously.
- If the car has not been counted before, the lane number and time are stored in a buffer.
  - Control is returned to the BASIC program when all four cars have crossed the finish line or if a key is depressed on the AIM 65 keyboard; otherwise the routine loops back to the polling step above.

The running time (from the start of the race) is accumulated using the 16-bit timer of the 6522 VIA chip. Each time the VIA times out (.065 second), the value of CLOCK is incremented. This gives about 16 seconds timer capacity before the timer rolls over.


Three bytes are needed in the buffer to record the CLOCK value and the 16-bit timer value for each car or lane. This value is converted back to decimal in the BASIC program.

### Conclusions

The electronic monitoring of a Pinewood Derby race is relatively easy and inexpensive for anyone owning an AIM 65 or similar microcomputer. This approach is software-oriented, since the only electronic components required are the optosensors. Although the AIM 65 was used here, with minor modifications the code could be used on the PET, KIM, or any 6502-based

machine that has four or five free 6522 VIA ports.

Sydney S. Koegler is a chemical engineer specializing in pilot-plant design and operation. You may reach Mr. Koegler at 2339 Carriage Ave., Richland, WA 99352.

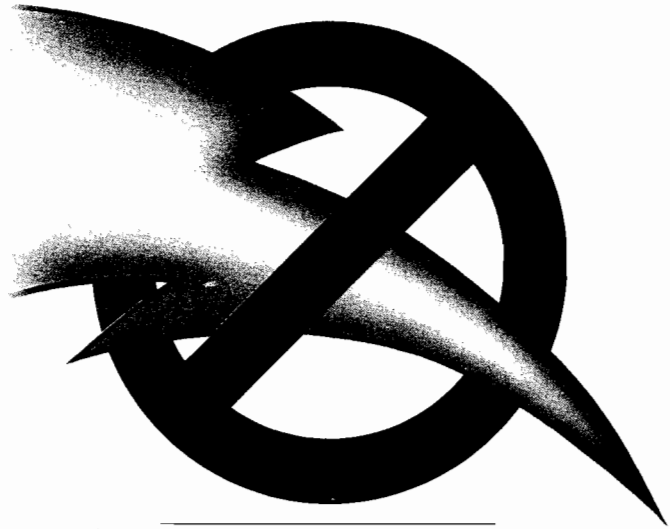

### NO POWER SPIKES WITH SUPER FAN II.


Super Fan II's Zener Ray™ Transient Voltage Suppressor and Power Filter squelches spikes up to 6000 amps – even those caused by lightning – while responding up to 100 times faster than Apple II's

built-in suppressor.

In addition, Super Fan II cools your Apple, removing heat buildup at a remarkable 17 cubic feet of air per minute. Yet it's the quietest fan of its kind on the market.

Super Fan II also positions a lighted on/off computer switch and two accessory plugs at your fingertips. It's warranted for two years and simply clips to your Apple II, IIe or monitor stand.

See your R.H. Electronics dealer today about Super Fan II\*, or contact us at 566 Irelan Street, Buellton, CA 93427, (805) 688-2047.

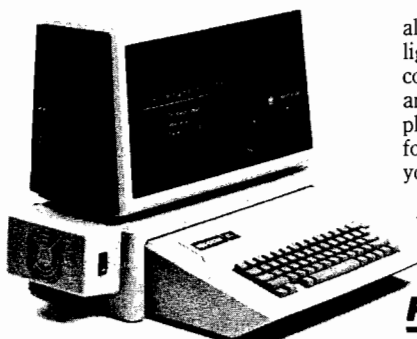

**RHELECTRONICS, INC.**

Super Fan II, in black or tan \$109.  
Without Zener Ray \$74.95.  
Additional air flow seals, \$5  
Available in 240V/50 Hz.

Dealer/OEM inquiries invited.  
\*U.S. Patent #D268283  
#4383286

France, call BIP 1-255-4463  
Australia, call Imagineering (02)212-1411

Circle No. 42

### Listing 1: BASIC Program for Pinewood Derby

```

100 REM...PINWOOD DERBY
110 REM...4-23-82
115 V=40961:REM...VIA PORT A
120 REM...DATA BUFFER $FF0-$FFF
125 BS=4080:BT=BS+4:BU=BT+4:BV=BU+4
130 REM...SET POINTERS FOR SCAN ROUTINE
135 POKE 04,0:POKE 05,15
140 INPUT"ENTER HEAT NO. ",H$
140 INPUT"LANE NO. ",L
142 IF L=0 THEN 190
145 INPUT"CAR NO. ",C(L)
170 IF L<>4 THEN 160
190 PRINT"    READY"
195 S=PEEK(V) OR 16
200 GET K$
205 IF K$="" AND S<>0 THEN 195
210 PRINT"  T I M I N G "
215 XX=USR(0):REM...CALL SCAN ROUTINE
220 FOR I=1 TO 4
225 TM(I)=.065536*PEEK(BT+I)+.000256*
    (255-PEEK(BU+I))
226 TM(I)=TM(I)+(255-PEEK(BV+I))*1E-6
227 TM(I)=INT(1000*TM(I))/1000
230 M=PEEK(BS+I)
233 IF M<=0 THEN P(I)=0:GOTO 250
235 P(I)=INT(1.1+LOG(M)/LOG(2))
240 NEXT
250 PRINT!"  ":PRINT!"HEAT #;H$
270 PRINT!"  PLAC LANE CAR TIME"
310 FORJ=1 TO 4
320 IF P(J)=0 THEN 350
330 PRINT!"  ";J;"  ";P(J);"  ";C(P(J))
    ;TM(J)
340 NEXT J
350 GOTO 140

```

### Listing 2: Assembly Listing of Timing Routine

```

; . . . PIN21 4-23-82 . . .
; DETERMINES 1,2,3,4 PLACE
; IN PINWOOD DERBY
; MODIFIED FOR TIMER FCNT
;
==0000 VIA=$A000 ;VIA BASE ADDRESS
==0000 T2LO=VIA+8 ;TIMER LOW BYTE
==0000 T2HI=VIA+9 ;TIMER HIGH BYTE
==0000 IFR=VIA+$0D ;INTERUPT FLAG
;
==0000 PLACE=$0FF0 ;BUFFER -
; FINISHING PLACE
==0000 TIME1=$0FF4 ;BUFFER - TIME,
; HIGH BYTE
==0000 TIME2=$0FF8 ;BUFFER - TIME,
; MIDDLE BYTE
==0000 TIME3=$0FFC ;BUFFER - TIME,
; LOW BYTE
==0000 CLOCK=$0FEE ;ACCUMULATED TIME
==0000 TEMP=$0FEF ;TEMPORARY DATA
; STORAGE
==0000 OUT=$C0D1 ;AIM BASIC
; RE-ENTRY POINT
==0000 GETKEY=$E907 ;AIM MONITOR
; KEYBOARD STROBE
;
==0000 *=$0F00
;
; INITIALIZE VARIABLES
;
==0F00 START A9 00 LDA #0
; 8D 03 A0 STA VIA+3
; 8D EE 0F STA CLOCK
; A2 04 LDX #4
==0F0B INIT 9D F0 0F STA PLACE,X
; 9D F4 0F STA TIME1,X
;
(continued)

```

```

          9D F8 0F      STA .TIME2,X
          9D FC 0F      STA .TIME3,X
          CA            DEX
          D0 F1        BNE INIT
          20 7B 0F      JSR CLICK
;
;   SAMPLE VIA FOR PASSING CARS
;
==0F1F  SCAN  AD 01 A0      LDA VIA+1
          8D EF 0F      STA TEMP
;
;   TIMER TIMED OUT ?
;
          A9 20        LDA #200100000
          2C 0D A0      BIT IFR
          F0 03        BEQ KEY
          20 7B 0F      JSR CLICK
;
;   CHECK FOR KEY DEPRESSED
;
==0F2F  KEY   20 07 E9      JSR GETKEY
          C9 FF        CMP #FF
          F0 03        BEQ CHECK
          4C D1 C0      JMP OUT
;
;   CHECK EACH BIT FOR PASSING CARS
;
==0F39  CHECK A9 01        LDA #1
==0F3B  CHECK1 2C EF 0F      BIT TEMP
          D0 09        BNE STORE
==0F40  CHECK2 C9 08        CMP #8
          F0 DB        BEQ SCAN
          18           CLC
          2A           ROL A
          4C 3B 0F      JMP CHECK1
;
;   STORE LANE NUMBERS
;   IN THE CORRECT SEQUENCE
;
==0F49  STORE  A2 01        LDX #1 (continued)

```

```

==0F4B  STORE1 4B          PHA
          BD F0 0F      LDA PLACE,X
          F0 11        BEQ NEXT ;NO CAR ?
          68           PLA
          E0 04        CPX #4 ;LAST BIT ?
          D0 03        BNE COMP
          4C D1 C0      JMP OUT
;
;   SEE IF LANE # ALREADY STORED
;
==0F59  COMP  DD F0 0F      CMP PLACE,X
          F0 E2        BEQ CHECK2
          EB           INX
          4C 4B 0F      JMP STORE1
;
;   STORE LANE # IN PLACE
;   STORE TIMER VALUES
;   GOTO NEXT BIT IN VIA
;
==0F62  NEXT  68           PLA
          9D F0 0F      STA PLACE,X
          AD EE 0F      LDA CLOCK
          9D F4 0F      STA TIME1,X
          AD 09 A0      LDA T2HI
          9D F8 0F      STA TIME2,X
          AD 08 A0      LDA T2LO
          9D FC 0F      STA TIME3,X
          4C 1F 0F      JMP SCAN
;
;   TIMER ROUTINE
;   (INCREMENTS 'CLOCK' EVERY .065 SEC)
;
==0F7B  CLICK 18           CLC
          EE EE 0F      INC CLOCK
          B0 09        BCS STOP
          A9 FF        LDA #FF
          8D 08 A0      STA T2LO
          8D 09 A0      STA T2HI
          60           RTS
==0F8A  STOP  00           BRK

```

MICRO™

# Take off and fly with the MACH-9

The 6809 adaptor for AIM-65\*

**"Just Released"**

**MACH-9 Control Pascal**

A superset of standard Pascal

No rom expansion board necessary

**Sieve\*\* Benchmark**

Compiled Bytes	Total Bytes	Comp + Load	Execute
154	154	12 sec	264 sec

Introductory Price \$69.00 plus \$5.00 S&H US and Canada

\*AIM-65 is a trademark of Rockwell International

\*\*Byte Magazine Sept. 1981 pg. 192

## MACH-9 Features:

- Superset of standard Pascal
- Two-pass assembler • Enhanced editor and paste editor • All chips socketed • Extra 8-K static ram • I/O sockets for roms •

\$239.00 plus 6.00 S&H\*\*\* US and Canada

For more information Contact:

Modular Mining Systems, Inc. • 1110 E. Pennsylvania St.  
Tucson, Arizona • 85714 • (602) 746-0418

In the UK Contact:

RCS Microsystems Ltd. • Gresham House  
Twickenham Rd. • Feltham Middlesex •  
TW13 0HA • 01-898-3775.



\*\*\*\$20.00 S&H for overseas.

$\frac{1}{2}$  $\frac{3}{4}$  $\frac{1}{3}$ 

# Fractionated

 $\frac{2}{3}$ 

# BASIC

 $\frac{7}{8}$  $\frac{4}{5}$  $\frac{5}{6}$ 

**A BASIC program to automate  
the calculation of fractions**

**by LeRoy Moyer**

**M**icrosoft BASIC is a good language for doing numerical calculations when you want the result of an arithmetic computation to be in decimal notation. Sometimes, however, when working with fractions you would like the result of a computation to be a fraction. Often it is hard to convert the decimal result that is generated by BASIC into the fraction that it represents. For example, 0.23076923 is not easily recognized as the fraction  $\frac{3}{13}$ . The fractions program I describe does all of its computations using fractions. That is, numbers are input as fractions and are output as fractions that have been reduced to their lowest common denominator.

Included in the program is an interpreter for the evaluation of one-line equations. The syntax for all equations in this interpreter is: (Variable Name) = (Algebraic Expression). The algebraic expression may contain numerical fractions, previously defined variables, or the symbols (, ), +, -, \*, and /. Hierarchy for the mathematical operations is the same as in BASIC. An example of a valid expression is: VARIABLE =  $\frac{3}{4} + X / (\frac{2}{3})$  when X has been defined previously. After this equation has been typed into the computer and return is pressed, the value of

VARIABLE is calculated, stored in memory under that name, and the value is printed on the next line. Variable names can be any length and all characters are significant.

Interpretation of the equation is accomplished by using two stacks — one for operators (OP\$) and one for numeric values of the fraction (ST and SB). When a number is encountered in the equation it is put on the number stack with the numerator in ST and the denominator in SB. If a variable name is encountered, then the variable is first looked up in the variable name table (VN\$) before the numeric value associated with that variable is transferred to the number stack. Finally, when an operator is encountered the precedence is compared with the precedence of the operator on the top of the operator stack. If the precedence of the new operator is higher, then the operator is placed on the operator stack; otherwise the top operator on the stack is used and the operator stack is reduced by one. This continues until the end of the equation at which time all remaining operations on the stack are completed and the results are printed out.

The listing of the program is commented extensively, but none of the

REM statements are used as references and so they can be eliminated to make the program shorter and faster. The program logically starts at line 1000, which initializes the arrays. An equation is input as a string (LN\$) at line 1100. First, the defined variable (VS\$) is separated out of LN\$ in line 1150 by looking for a blank space or an equal (=) sign. The subroutine starting at line 1700 then checks to see if there is a unary minus sign. If a minus sign is found, the symbol | is put on the operator stack and used only inside the program. Any symbol will work but this particular symbol is not used commonly on the Apple, for which this program was originally written. From this point, the program steps through the rest of the line (LN\$) checking to see if the next part of the equation is a variable (line 1240), a number (line 1250), or a symbol (line 1260). If it is one of these types of items, the program then goes to lines 1500, 1400, or 1300, respectively, for each type.

The section of the program starting at line 1300 handles the symbols in the equation. First it checks to see if the symbol was a ( since this has the highest precedence. If it is, the program

*(continued on page 67)*

## Listing 1: Applesoft Listing for Fractionated BASIC

```

10 GOTO 1000
95 REM ADDITION/SUBTRACTION
100 T = T1 * B2 + T2 * B1: B = B1 * B2: GOTO 130
105 REM MULTIPLICATION
110 T = T1 * T2: B = B1 * B2: GOTO 130
115 REM DIVISION
120 T = T1 * B2: B = T2 * B1
125 REM REDUCE THE FRACTION T/B TO LOWEST TERMS
130 IF T = 0 THEN B = 1: RETURN
140 IF B = 0 THEN PRINT "DIVISION BY ZERO":
POP: GOTO 1100
150 TA = ABS (T): TB = ABS (B): IF TA < TB THEN
TM = TA: TA = TB: TB = TM
160 DV = INT (TA / TB): R = TA - TB * DV
170 IF 0 = R THEN 190
180 TA = TB: TB = R: GOTO 160
190 T = SGN (B) * T / TB: B = ABS (B) / TB: RETURN
395 REM DO THE LAST OPERATION ON THE OPERATOR STACK
396 REM IF NO OPERATORS YET THEN PUT THE OPERATOR
ON THE STACK
400 IF NP = 0 THEN NP = 1: OP$(NP) = TS$: RETURN
410 IF OP$(NP) = "<" THEN NP = NP + 1: OP$(NP) = TS$
: RETURN
415 REM CHECK FOR A UNARY MINUS AND DO IF ON
OPERATOR STACK
420 IF OP$(NP) = "]" THEN ST(NS) = - ST(NS):
OP$(NP) = TS$: RETURN
425 REM PULL TOP TWO NUMBERS OFF OF STACK FOR
OPERATION
430 T1 = ST(NS - 1): B1 = SB(NS - 1): T2 = ST(NS):
B2 = SB(NS)
435 REM PICK THE PROPER SUBROUTINE TO GO TO
440 IF OP$(NP) = "*" THEN GOSUB 110: GOTO 480
450 IF OP$(NP) = "/" THEN GOSUB 120: GOTO 480
460 IF OP$(NP) = "+" THEN GOSUB 100: GOTO 480
470 T2 = - T2: GOSUB 100
475 REM STORE THE RESULT BACK ON THE NUMBER STACK
480 NS = NS - 1: ST(NS) = T: SB(NS) = B: OP$(NP) = TS$
: RETURN
995 REM START OF THE PROGRAM
1000 DIM VN$(200), VT(200), VB(200),
OP$(50), ST(100), SB(100)
1010 NV = 0
1095 REM READ IN A LINE TO BE EVALUATED
1100 INPUT "#"; LN$
1105 REM CHECK TO SEE IF VARIABLES ARE TO BE PRINTED OUT
1110 IF LEFT$(LN$,1) = "?" THEN FOR Z = 1 TO NV:
PRINT VN$(Z); " = "; VT(Z); "/"; VB(Z): NEXT Z: GOTO 1100
1120 LG = LEN (LN$): CN = 1: NP = 0: NS = 0
1125 REM SKIP LETTERS UNTIL A BLANK OR = SIGN ARE FOUND
1130 IF MID$(LN$,CN,1) = " " OR MID$(LN$,CN,1)
= "=" THEN 1160
1140 IF CN < LG THEN CN = CN + 1: GOTO 1130
1150 PRINT "SYNTAX ERROR": GOTO 1100
1155 REM THE VARIABLE BEING DEFINED IS VS$
1160 VS$ = LEFT$(LN$,CN - 1)
1170 IF MID$(LN$,CN,1) = "=" THEN 1200
1180 IF CN < LG AND MID$(LN$,CN,1) = " " THEN
CN = CN + 1: GOTO 1170
1190 GOTO 1150
1195 REM CHECK FOR A UNARY MINUS SIGN
1200 GOSUB 1700
1210 CN = CN + 1
1220 IF MID$(LN$,CN,1) = " " AND CN < LG THEN 1210
1230 IF CN > LG THEN 1600
1235 REM FIND THE FIRST CHARACTER AFTER THE =
1240 TS$ = MID$(LN$,CN,1): IF TS$ = ">" AND
TS$ < = "Z" THEN 1500
1245 REM IF A NUMBER - GOTO 1400 TO GET NUMBER
1250 IF TS$ < = "9" AND TS$ > = "0" THEN 1400
1255 REM IF A SYMBOL - GOTO 1300 TO EVALUATE
1260 IF TS$ = "(" OR TS$ = ")" OR TS$ = "+" OR TS$
= "-" OR TS$ = "*" OR TS$ = "/" THEN 1300
1270 GOTO 1150
1295 REM THIS SECTION CHECKS THE PRECEDENCE OF
THE OPERATORS
1296 REM IF A ( - PUT IT ON THE STACK AND CHECK
FOR A UNARY -
1300 IF TS$ = "(" THEN NP = NP + 1: OP$(NP) = "(" :
GOSUB 1700: GOTO 1210
1305 REM CHECK FOR + OR -. IF FOUND DO THE PREVIOUS
OPERATOR
1310 IF TS$ < > "+" AND TS$ < > "-" THEN 1330
1320 GOSUB 400: GOTO 1210
1325 REM IF PRESENT OP IS * OR / AND PREVIOUS
OP IS * OR / THEN DO

```

(continued)

```

1330 IF TS$ < > ")" AND (OP$(NP) < > "+" AND
OP$(NP) < > "-" THEN 1320
1335 REM OPERATION IS NOT TO BE DONE SO PUT IT
ON STACK
1340 IF TS$ < > ")" THEN NP = NP + 1: OP$(NP) = TS$:
GOTO 1210
1345 REM WORK BACK TO NEXT ( TO COMPLETE A ( )
EXPRESSION
1350 IF OP$(NP) = "(" THEN NP = NP - 1: GOTO 1210
1360 GOSUB 400: IF NP > 0 THEN NP = NP - 1: GOTO 1350
1370 PRINT "STACK ERROR": GOTO 1100
1395 REM EVALUATE A NUMBER
1396 REM GET THE FIRST NUMBER
1400 T = VAL ( MID$(LN$,CN)): CN = CN + LEN ( STR$(T))
1410 IF CN = > LG THEN B = 1: GOTO 1450
1420 IF MID$(LN$,CN,1) = " " THEN CN = CN + 1:
GOTO 1410
1425 REM IF THE NEXT SYMBOL IS NOT A / THEN NOT
A FRACTION
1430 IF MID$(LN$,CN,1) < > "/" THEN B = 1: CN =
CN - 1: GOTO 1450
1440 CN = CN + 1: B = VAL ( MID$(LN$,CN)): CN = CN
+ LEN ( STR$(B)): IF B = 0 THEN PRINT "DIVISION
BY 0": GOTO 1100
1445 REM PUT NUMBER ON THE STACK
1450 NS = NS + 1: ST(NS) = T: SB(NS) = B: GOTO 1210
1495 REM FIND THE NAME AND VALUES OF A VARIABLE
1500 CS = CN
1510 TS$ = MID$(LN$,CN,1)
1515 REM LOOK FOR A CHARACTER THAT IS NOT IN THE
VARIABLE
1520 IF TS$ = " " OR TS$ = ")" OR TS$ = "+" OR TS$
= "-" OR TS$ = "*" OR TS$ = "/" THEN CN = CN - 1
: GOTO 1540
1530 IF CN < LG THEN CN = CN + 1: GOTO 1510
1535 REM FOUND THE NAME OF THE VARIABLE TS$
1540 VS$ = MID$(LN$,CS,CN - CS + 1): I = 1
1550 IF NV = 0 THEN 1580
1555 REM IF VARIABLE FOUND PUT ITS VALUE ON THE STACK
1560 IF TS$ = VN$(I) THEN NS = NS + 1: ST(NS) = VT(I):
SB(NS) = VB(I): GOTO 1210
1570 IF I < NV THEN I = I + 1: GOTO 1560
1575 REM IF VARIABLE NOT FOUND IN LIST QUIT
1580 PRINT "VARIABLE "; TS$; " NOT DEFINED": GOTO 1100
1595 REM END OF EQUATION REACH - DO REST OF
OPERATORS ON STACK
1600 IF NP > 0 AND OP$(NP) = "(" THEN NP = NP - 1
: GOTO 1600
1610 IF NS > 1 AND NP > 0 THEN TS$ = "#":
GOSUB 400: NP = NP - 1: GOTO 1600
1615 IF NP = 1 AND OP$(NP) = "]" THEN TS$ = "#":
GOSUB 400: GOTO 1630
1620 IF NP < > 0 THEN PRINT "STACK DISJOINT":
GOTO 1100
1625 REM PRINT OUT THE RESULTS
1630 PRINT VS$; " = "; ST(1); ": IF SB(1) < > 1 THEN
PRINT "/"; SB(1);
1640 PRINT : I = 1
1645 REM SEE IF VARIABLE HAS BEEN USED BEFORE
1646 REM IF IT HAS PUT NEW VALUES IN
1650 IF NV = 0 THEN NV = 1: VN$(NV) = VS$: VT(NV) =
ST(1): VB(NV) = SB(1): GOTO 1100
1660 IF VS$ = VN$(I) THEN VT(I) = ST(1): VB(I) = SB(1)
: GOTO 1100
1670 IF I < NV THEN I = I + 1: GOTO 1660
1675 REM IF VARIABLE NOT USED BEFORE DEFINE A
NEW VARIABLE
1680 NV = NV + 1: VN$(NV) = VS$: VT(NV) = ST(1): VB(NV)
= SB(1): GOTO 1100
1695 REM SEARCH FOR THE NEXT CHARACTER TO SEE IF -
1700 CN = CN + 1: IF MID$(LN$,CN,1) = " " THEN 1700
1710 IF MID$(LN$,CN,1) < > "-" THEN CN = CN - 1 :
RETURN
1715 REM IF MINUS PUT SPECIAL SYMBOL ON OPERATOR STACK
1720 NP = NP + 1: OP$(NP) = "]" : RETURN

```

**Fractionated  
requires:**

**Microcomputer with Microsoft  
BASIC**

**OSI — OSI — OSI — OSI**  
**192K RAM**  
**BOARD**

**ONLY \$895**

*The CCS - 192K is divided into  
4 - 48K bank partitions.*

*Each board can be dip switch  
selected for 1 of 4 192K banks.*

*When combined with our CPU  
the 192K RAM Board implements a  
four user computer system at a  
logic cost of \$1595 (special package price).*

*Combine this logic package  
with our Tilios Operating System  
and you have a multi-user computer  
with throughput that has to be  
seen to be believed.*

Circle No. 44

7250 COMMERCE CIRCLE EAST • FRIDLEY, MINNESOTA 55432 • PHONE (612) 574-9493  
(800) 328-2419

puts a ( on the operator stack, checks for a unary minus sign, and then returns to line 1210 for the next item in the equation. In line 1310 the program checks to see if a + or - sign was the symbol encountered. If it was, this implies that the precedence was such that the last operation on the stack should be done since these are the lowest precedence. The program accomplishes this by jumping to the subroutine starting at line 400, which checks the symbol on the top of the operator stack and then does the required operation. If the operation is +, -, \*, or / then the appropriate subroutine starting at line 100, 110, or 120 is called. These routines for binary operations in lines 100 to 120 in turn feed into line 130, which reduces the fraction to the lowest common denominator. Upon return to the subroutine starting at line 400, the result of the operation is placed on the number stack and the program returns to get the next part of the equation.

The next check (line 1330) is to see if the present symbol is a \* or / and the operator on the top of the operator stack is also a \* or /. If this is true, then the operation is done by jumping to the subroutine at line 400; otherwise (line 1340) the symbol \* or / is put onto the operator stack since it has a higher precedence and is not to be done yet. Finally if a ) is encountered, the program unfolds the operator stack until a ( is encountered.

Starting at line 1400 the program interprets a number by using the VAL function. If the first number is not followed by a / then the number is assumed to be a whole number and the denominator is set to 1. The numerator and denominator are put on the number stack in line 1450.

In the section of the program starting at line 1500, we parse out the name of a variable used in the equation to be evaluated. This is accomplished by stepping through the characters in LN\$ until a character is found that cannot be part of the variable name. After this name is found in line 1540 the list of previously defined variable names is searched. If the name is not found in the list then an error message is printed; otherwise the value associated with that variable, stored in VT and VB, is put on the stack.

Eventually the program comes to the end of the equation it is evaluating and must complete all of the operations that are left on the stack. This is accomplished by the code starting at line 1600. The value calculated is then

printed on the screen along with the variable name in line 1630. A search of the variable name list is made to see if this variable has been defined before. If the variable has been defined, then the values are substituted in, and if it has not been defined, then a new variable is created. The program then jumps to line 1100 to get another equation to evaluate.

Fairly complex calculations with fractions are made easier by using this program. It is possible, however, to expand the program to make it even easier to use. For example, with the addition of an editor and a few control commands, the program could be expanded to enable you to write programs

that work in fractions similar to the way BASIC works with decimals. Another possible way to change the program is to redefine the arithmetic so that the two numbers now representing the numerator and denominator are interpreted to be the real and imaginary parts of a complex number; then one could have a calculator that does complex number arithmetic.

---

LeRoy Moyer is a physicist for the Army and teaches computer programming part time at Piedmont Virginia Community College. You may contact him at Rt. 9, Box 236, Charlottesville, VA 22901.

---

MICRO™

## "POWER FAILURE"

Goodbye valuable data. Unless you have a Guardian Angel uninterruptible power source on duty.

Guardian Angel switches to 150 watts of backup power in 1/100 of a second or less while alerting you of blackout or brownout conditions. Its rugged 12V battery gives you up to six minutes (15 at half-rated power), enough to save your data and shut down your system if line power does not return.

Guardian Angel is compatible with virtually every major microcomputer system, including Apple, IBM, H-P, TRS-80, Xerox, Eagle and Osborne. Its transient voltage suppressor also prevents system damage from power spikes.

Guardian Angel simply plugs in between your power source and your microcomputer. Its compact size permits either desktop use or out of the way placement.

Protect your investment: see your R.H. Electronics dealer today about Guardian Angel or contact us at 566 Irelan Street, Buellton, CA 93427, (805) 688-2047.



Guardian Angel™, with LED power status indicator, automatically safeguards data from blackouts, brownouts for just \$595.

**RHELECTRONICS, INC.**

\*Patents pending, UL listed, FCC approved, 240V/50 Hz version available. Dealers and OEM inquiries invited.

Thank  
Heaven  
We got a  
Guardian  
Angel.™

\*



# The Avant-Garde Programmer's Series:

## A HI-RES ELECTRONIC DESIGN

Create and print electronic circuit plans. Keyboard selection and rotation of 98 different electronic components. Paddles or joysticks provide easy placement. **\$29.95**

## A HI-RES SECRETS

Complete Apple® graphics utility fills the needs of today's creative programmer. 263 pages of revealing documentation. Completely relocatable color graphic, animation and sound routines. The most useful package on the market. **\$125.00.**  
Demo available \$10.00

## A HI-RES ARCHITECTURAL DESIGN

Plan and design individual rooms, complete floor plans and total buildings. 75 different floor plan shapes can be easily rotated and moved. Lengths, diagonals and angles are calculated on-screen. **\$29.95**

## A SUPER QUALITY EPSON HI-RES DUMP

Best quality Epson dump features true black copy. Mirror, negative, flip or rotated images available in three sizes. Automatic horizontal centering. **\$25.00**

## A HI-RES SECRETS GRAPHICS APPLICATIONS SYSTEMS

Step from Basic to better Basic programs. Basic to Assembly hi-res graphics. Create graphs, electronic and architectural designs, arcade and adventure games, more! Fastest color-fill; 300 colors/patterns. **\$75.00**

## A PAINT MASTER SCENE UTILITY


Allows line drawing, scene painting, scene editing, screen color-fill routines anywhere. Perfect for adventure game creation or computer art. Over 300 colors/patterns. use creations in your own program. **\$34.95**

## A SUPER SHAPE DRAW AND ANIMATE

Draw in any direction using keyboard commands. Two types of animation, rotation, scale, background color, shape color and more. **\$34.95**

## A ACTION SOUNDS AND HI-RES SCROLLING

Machine language sounds, hi-res scrolling routines and Super-font program in one useful package. **\$18.95**

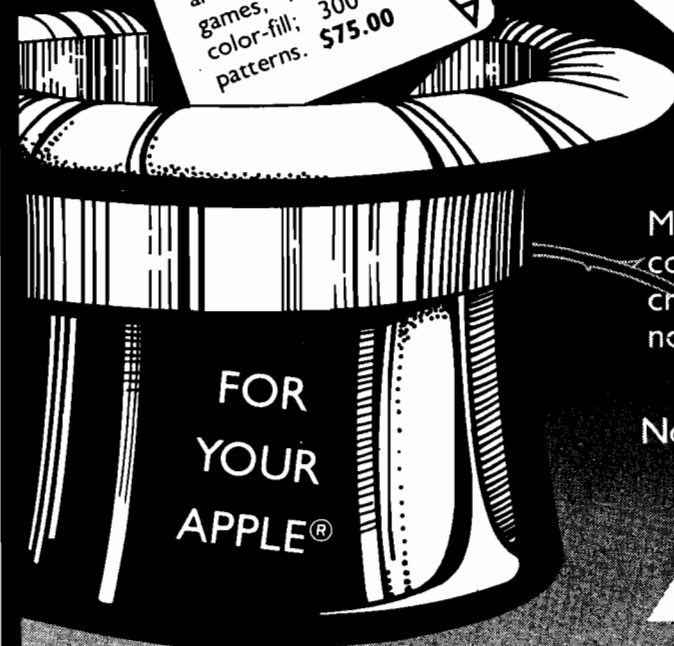

## Why Better?

### Because There Are No Secrets!

Most of these programs are unprotected or completely listable and may be used in all your creations, with no royalties required. They turn novices into professionals and professionals into absolute magicians!

Now Available from Your Local Software Dealer and by calling us directly at **(503) 345-3043**

▲ AVANT-GARDE CREATIONS, INC.

P.O. Box 30160 Eugene, OR 97403

ARE YOUR CREATIONS MARKETABLE? ARE YOU A QUALIFIED PROGRAMMER LOOKING FOR ASSIGNMENT? GIVE US A CALL

# The

# MICRO

# LEARNING CENTER

Atari 800

Texas Instrument

## Features:



- **Four-Color Hi-Res Graphics for the VIC-20**

*by Brian S. Zupke*

Use the joystick to draw pictures in four different colors.

- **VIC Player**


*by Phil Daley and Bob Tripp*

A five-octave keyboard program.

- **An Inexpensive Joystick for the VIC-20, C64, and Atari**

*by David A. Bryson*


For only \$15.00 and two hours time, you can have a lightpen for all three machines.

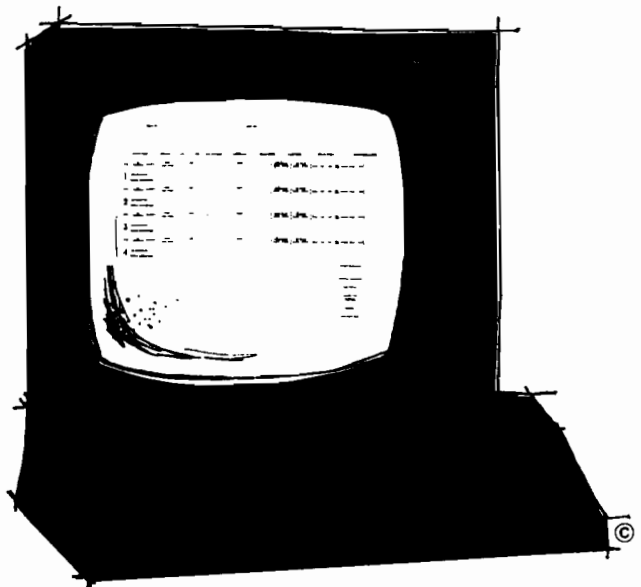






# Four Color High-Res Graphics for The VIC-20

by Brian S. Zupke

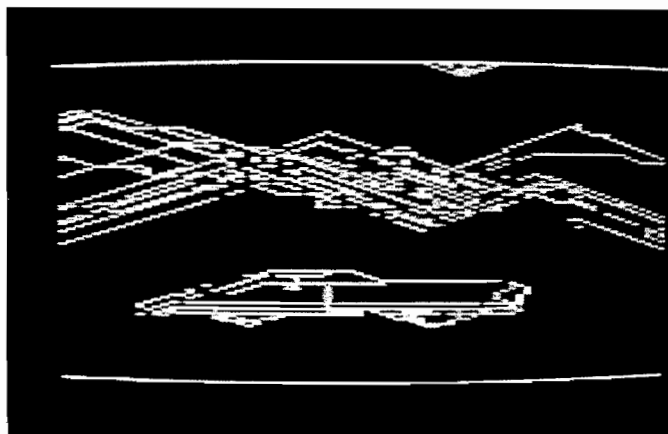

Multicolor mode graphics on the VIC-20.

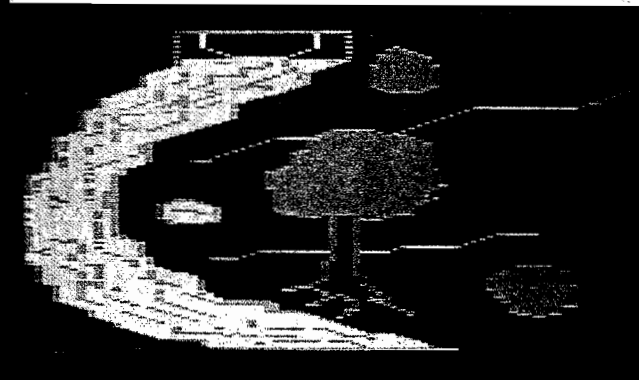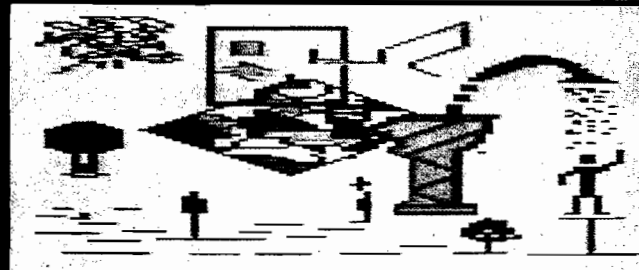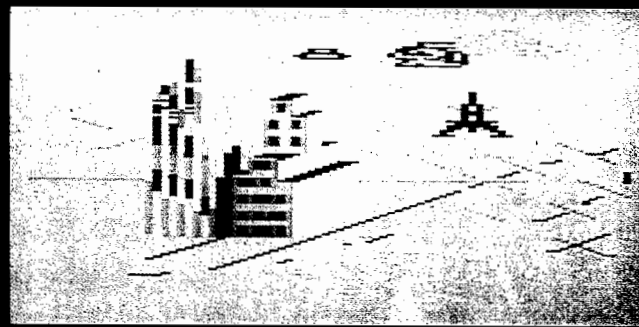

Photos taken from AMDEK Color I Monitor.

Many VIC-20 programmers know how high-resolution graphics are done — but with only two colors (screen color and character color). The VIC is capable of displaying four-color hi-res graphics using the multicolor mode. The question is how is it done?

In order for the VIC to distinguish among four colors within one character, a sacrifice has to be made. First, with two-color graphics each pixel in a character has only two states: on or off. One bit is needed to address each pixel. Using the multicolor mode, there are four states in which a pixel can be. Two bits are necessary for describing each pixel. This means that the VIC either must use twice as much memory for the character-bit map to have the same resolution, or it must have half the normal resolution. The VIC is incapable of the first alternative, so you are stuck with a lower resolution. Each color pixel is twice as wide (two regular pixels) as it is high. The entire screen has a total resolution of 16,192 pixels in this mode, and each character becomes 4 pixels wide and 8 or 16 pixels high.

The four colors available in the multicolor mode are screen color, border color, character color, and auxiliary color. Whether the multicolor mode for a character is used or not is determined

by the value of the corresponding color memory location. If bit 3 is set, or if the value of the location is from 8 to 15, then the computer views that character as multicolored. It is possible to have regular graphics and multicolored graphics on the screen at the same time by setting the color memory locations accordingly.

Screen color is designated by a 00 (binary) value. If a pixel in a multicolored character has this value, then it will be the same color as the screen. Border color is designated by 01, character color by 10, and auxiliary color by 11. The value of the auxiliary color is located in the four most significant bits of location 36878. It can have a value of from 0 to 15 and is set by

```
POKE 36878,16 * COLOR
or, if you are also using sound,
POKE 36878,PEEK(36878) AND 15 OR
(16 * COLOR)
```

Although only four colors can exist in a character at one time, the colors can be changed easily by changing the color of the screen, border, character, or auxiliary color.

To address multicolor graphics on the screen, a method similar to the one used in two-color plotting is used. The double characters (8 x 16 pix-



els) are used, and plotting is done by ANDing and ORing bytes in the character memory, except now you have two bits to change at the same time.

First you must determine which character contains the pixel to be changed. The grid will be 20 characters wide (80 color pixels) and eight characters high (128 color pixels). Finding the correct character is done by

$$\text{CHAR} = 20 * \text{INT}(Y/16) + \text{INT}(X/4)$$

where X and Y are the coordinates of the point. Y is divided by 16 since each character is 16 pixels high, and it is multiplied by 20 for the 20 characters in each row. X is divided by 4 since there are only four pixels across each character. To determine which byte is to be changed, you must use

$$\text{BYTELOC} = \text{BASE} + 16 * \text{CHAR} + Y - \text{INT}(Y/16) * 16$$

where BASE is the base address of the character bit map. CHAR is multiplied by 16 to skip over the 16 bytes of each character preceding it in the table. The remainder of Y divided by 16 gives the correct byte in the character to be changed. Sounds all too familiar, right? Now for the hard part. You must leave six of the eight bits unchanged and change the two correct bits to the color you want. First determine which of the four pairs of bits to change:

$$\text{PAIR} = 4 \uparrow (3 - (X - \text{INT}(X / 4) * 4))$$

The remainder of X divided by 4 determines which pair of bits is to be changed. It has a value of from 0 to 3. By raising 4 to the reverse-of-this-remainder'th power (3,2,1,0 instead of 0,1,2,3),

the base value of the pair is known. It is the value of the least significant of the two bits in each of the four pairs. Now the color value to be plotted must be replaced with the value that already exists in the bit pair. These two bits must be cleared first. This is done by ANDing the pair with zeros and the remaining six bits with ones:

$$\text{BYTE} = \text{BYTE AND } (255 - \text{PAIR} * 3)$$

Now that the bit pair has been cleared, you can add the color you want by ORing the cleared bit pair with the value of that color (from 0 to 3):

$$\text{BYTE} = \text{BYTE OR } (\text{PAIR} * \text{COLOR})$$

When the value of BYTE is placed back into the bit map, the added color will be displayed.

The program COLOR DRAW runs on an unexpanded VIC and requires a joystick. Adding the 3K expander will allow you to add more features, but adding 8K or more will, surprisingly, result in not enough memory for the program! By moving the start of BASIC to the beginning of the expansion RAM, you can avoid this problem. The screen, border, character (all characters have the same color in this program), and auxiliary colors may be changed at any time by pressing "C". The computer will ask for their values. The auxiliary and screen colors can be from 0 to 15 while the border and character colors are from 0 to 7. Table 1 shows which color corresponds to each number.

The four function keys are used to switch between the colors (screen, border, etc.): F1 is the screen color, F3 is the border color, F5 is the character color, and F7 is the auxiliary color. The joystick is used to direct the blinking cursor. If you wish to move the cursor without disturbing the screen then hold the fire button down when you move it, which allows you to cross over different colors.

MICRO

Listing 1

```

10 POKE56,20:POKE52,20:V=36864:T=5120:D=16:PB=37152:DD=PB+2:PA=PB-1
20 INPUT"NEW SCREEN":R#:IFR#="Y" THENFORX=TTOT+2560:POKEK,0:NEXT
30 DEFFNA(J)=41R#J:GOSUB1000
100 POKEV+15,M:POKEV+14,A:FORX=38400TO38720:POKEV,5:NEXT
110 POKEV+3,47:POKEV+5,253:Y#=0:FORY=BTOT
120 FORX=BTOT+15:SR=7720+Y#*2+X:POKESA,X#:POKESA+30720,C#:X#*2+1:NEXTX,Y:J=0
130 X#=#/4:Y#=#/4:R=3-(X#*4):S=20*Y#+X#
140 SA=T+(D#S)+Y-(D#Y#):SC=PEEK(SA):Q=SC:GOTO150
150 GOSUB2000:GETR#:IFR#="" THENK=0:GOTO170
160 K=RSC#R#:IFK=132 THENJ=K-133
170 IFK=67 THENGOSUB1000:GOTO100
180 POKEDD,127:K=(NOTPEEK(PA) AND60-(PEEK(PB) AND128)-0):POKEDD,255
190 IFK=0 THENK=X+SGN(K AND1)-SGN(K AND16):V=Y+SGN(K AND8)-SGN(K AND4):GOTO210
200 GOTO150
210 IFX=79 THENK=79
220 IFX=0 THENK=0
230 IFY>127 THENY=127
240 IFY=0 THENY=0
250 IF(K AND32)=0 THENSC=SC AND(255-FNA(3)):ORFNA(J)
260 POKESA,SC
270 GOTO130
1000 POKEV+3,46:POKEV+5,248:POKEV+15,27:INPUT"SCREEN,BOR,CHR,AUX":S,B,C,A:C=C+8
1010 A=#D:W=#S+D+B:PRINT"J":RETURN
2000 IFF THENF=0:Q=Q AND(255-FNA(3)):ORFNA(J):GOTO2020
2010 F=1:Q=Q AND(255-FNA(3)):ORFNA(3-J)
2020 POKESA,Q:RETURN

```

Value	Color
0	BLACK
1	WHITE
2	RED
3	CYAN
4	PURPLE
5	GREEN
6	BLUE
7	YELLOW
8	ORANGE
9	LIGHT ORANGE
10	PINK
11	LIGHT CYAN
12	LIGHT PURPLE
13	LIGHT GREEN
14	LIGHT BLUE
15	LIGHT YELLOW

Table 1

You may contact Mr. Zupke at 5152 Marcella Ave., Cypress, CA 90630.



# VIC PLAYER

**Convert your VIC into a simulated organ with VIC Player. The keys of the organ are represented by the keys on the VIC keyboard.**

by Phil Daley and  
Bob Tripp

**W**ith the VIC Player installed in your computer you can make your VIC an entertaining and instructive device. Each note you play can be heard on the VIC sound registers. The keyboard spans three complete octaves, and the range can be extended by selecting among three overlapping registers for a total range of five octaves! Each note that is played is stored in memory so that it can be instantaneously replayed or saved on cassette tape for later use. Then you can load your song from cassette tape and replay it.

We have included a feature in VIC Player that allows you to stop playing, go back to correct mistakes, replay the song from the beginning to the current note, and then continue playing additional notes.

## Using the VIC Player

After choosing the 'PLAY SONG' option from the menu, a representation of the VIC keyboard is

printed on the screen in the format of a two-keyboard organ. The bottom row of keys represents the lowest notes starting with 'C' and ascending alphabetically. The second row of keys represents the sharps and flats (black keys) that correspond to the first row. Note that there are in-between keys on the second row of the VIC for every pair of first row notes. This is different than the normal organ keyboard and means that some of the second row keys do not sound when pressed (A, F, and K). These keys can be used to introduce rests into your song.

The third row of keys represents the second keyboard of the organ starting at middle 'B' and ascending to high 'C'. 'C' is not listed on the screen display due to space limitations, but is available by pressing the '\*' key. The top row of keys represents the sharps and flats corresponding to this second keyboard. When you have mastered the keyboard, you are well on your way to composing your own music. Read on.



At the beginning, the program waits for you to start the song. This is one of the few times when a pause doesn't count. Once you start playing, the computer keeps track of every note and its length and register exactly as you play it. Practice a little bit to get the feel of the keyboard. It is not as simple as a piano, especially with the letters on the keys distracting you from what the true note is. The white keys on the display have the actual name of the note printed over the keyboard name of the key to help keep you oriented.

After you start a song, you may discover that you didn't mean to play a particular note. Fortunately there is a mistake-recovery method. As soon as you realize that you have made an error (sometimes the first note is an error), press the space bar to pause momentarily. You will be presented with several options.

1. CONTINUE allows you to start playing the song at exactly the point where you stopped. This is a useful technique for the times when you become confused as to which note you want to play next; press the space bar to pause, regather your wits, and press 'C' for continue, continuing from where you stopped.
2. REPLAY will play the song up through the current note so that you can inspect your masterpiece as you input and make corrections if necessary. This option can be chosen as many times as you need it.
3. BACKUP is the option for which you've been waiting. This allows you to remove one note at a time from the current song, all the way back to the beginning, if you want. When you make a mistake and press the space bar to pause, press the 'B' option and the note you are erasing will sound. Another 'B' will erase the next note, and so on. Then pressing 'C' will allow you to continue your song from the point to which you have backed up.

If, no matter how hard you try, you can't seem to get the song perfect, then the next step is to use the 'SONG EDITOR' program. This program is described in detail later in the article.

### Other Menu Options

There are five additional menu options that allow you to hear your song, load a song from or save a song to the tape player, change the tempo of the song, or quit.

Choosing option number two, 'REPLAY SONG', will play the song currently in memory over the television speaker. The routine uses the current tempo for the speed at which to play the song. If there are no notes in the song, then 'NO SONG IN MEMORY' is printed and you are returned to the menu.

The 'SAVE' and 'LOAD' options are numbered three and four, respectively. To save the current song, choose '3' and answer the 'WHAT IS THE NAME OF THE SONG?' question with the name that you want to call the song. After you press

< return > you are prompted to press RECORD and PLAY on the tape player. When the song is saved, you are returned to the menu and the tape player will stop. If there are no notes in the song, you will be so informed and returned to the menu.

Option number four is similar in operation to option number three. Remember that when you LOAD a new song, you will erase any song currently in memory; you must SAVE the current song (if you want to keep it for later use) before loading a new one. The 'WHAT IS THE NAME OF THE SONG?' prompt will appear. If you don't know the name of the song, or you want the next song on the tape, press < return > and the next song will be loaded. If you have several songs on the tape, type the specific name of the song you want and the VIC will search through the tape until it finds the correct song. If the song isn't on the tape, you will have to press the RUN/STOP key to recover.

To change the current tempo setting, choose option five. The minimum (fastest) setting allowed is '1'. There is no restriction on the maximum (slowest) setting, except the limits of the VIC. However, a setting of over one hundred will result in extremely long notes.

When you are finished with VIC PLAYER and want to return to BASIC, choose option six. Always remember to save any song that you are currently working on before choosing this option. If you forget this rule, typing 'GOTO20' might enable you to return to the program without losing your song.

### The Program

The VIC Player program contains six major functions, which are selected from a menu, three minor functions used during the playing of a song from the keyboard, and some support subroutines.

The main program (lines 10-50) calls subroutines to initialize program, turn off the sound generators, and print the menu on the display. It waits for a character in the range of the menu (1 to 6) then goes to the appropriate subroutine to service the selected function.

The PLAY SONG subroutine (lines 1000-1120) calls a subroutine to print the music keyboard, gets input from the keyboard, calls a subroutine to pack information about the current note and store it in memory, and then, depending on which key you press, will do one of the following things:

*Space* goes to the 'Continue, Replay, Back Up' subroutine;

*Cursor Up or Cursor Right* terminates the song by putting a 0 in the next song location and returning to the main menu;

'f7', 'f5', or 'f3' sets the register number and the current sound register pointer, calls a subroutine to turn off all sound registers, and continues in the



PLAY SONG routine;

An *undefined key* is converted to a 'musical rest'; and,

A *defined key* (i.e., a 'music key') is converted to its sound generator.

The REPLAY SONG subroutine (lines 2000-2070) prints the message 'PLAYING' and the song title, if there is one. If there is no song in memory, it prints the message 'NO SONG IN MEMORY', goes to a subroutine that produces a delay to enable the message to be read, and then returns to the main program.

If there is a song in memory, REPLAY calls a subroutine to unpack the register number, note pointer value, and duration for the next note from the song table. It uses a subroutine to output the note to the sound generator for the specified duration. The sound generator is then turned off and the song pointer incremented to the next note. If the maximum song length has been exceeded, then a return is made to the main program; otherwise the keyboard is checked and if any key is pressed a return is made to the main program.

If no key is pressed, the next note of the song is unpacked and tested. If it is not the 'end of song' indicator (a zero value) the program continues playing the song. At the end of the song, REPLAY uses a subroutine to generate a brief delay and then goes to the main program.

The SAVE SONG subroutine (lines 3000-3030) uses a subroutine to print the message 'WHAT IS THE NAME OF THE SONG?' and inputs a song name. It opens the cassette device for saving information and outputs the song information one note at a time. When it detects the zero note that signals the end of the song it closes the cassette device, prints the message 'SAVED', and exits through the delay routine.

The LOAD SONG subroutine (lines 4000-4030) uses a subroutine to print the message 'WHAT IS THE NAME OF THE SONG?' and inputs a song name. It opens the cassette device for loading information and inputs the song information one note at a time. When it detects an empty note it closes the cassette device, prints the message 'LOADED', and exits through the delay routine.

The CHANGE TEMPO subroutine (lines 5000-5020) prints the current value of the tempo

(continued)

### VIC Player Listing

```

10 POKE36879,27:GOSUB12000
20 GOSUB9500:GOSUB10000
30 GETA#:IFA#="" THEN30
40 V=VAL(A#):IFV<10RV>6THEN30
50 ONV GOSUB1000,2000,3000,4000,5000,6000:GOTO20
1000 V=0:F=0
1010 GOSUB11000:PEM PRINT KEYBOARD
1020 D=0
1030 GETA#:D=D+1:IFA#="" THEN1030
1040 IFF=1 THEN1050
1045 GOSUB9700:POKECR,0
1050 F=0:IFA#="" THENGOSUB8000:GOTO1010
1060 IFA#="M" ORA#="N" THENPOKECR,0:WZ(V+1)=0:RETURN
1070 TP=ASC(A#)
1080 IFTP<133 ANDTP<137 THENR=136-TP:CR=R+RG:GOSUB9500:F=1:GOTO1020
1090 NX=TP-42:IFNX<50 THEN NX=3
1100 NP=NP+(NX):POKECR,ASC(NP)
1110 V=V+1:IFV=L THENWZ(V)=0:RETURN
1120 GOTO1020
2000 PRINT"PLAYING":PRINT#:V=1
2010 IFWZ(V)=0 THENPRINT"NO SONG IN MEMORY":GOTO9000
2020 GOSUB9200
2030 GOSUB9800
2040 POKECR,0:V=V+1:(FV<L THENRETURN
2050 GETA#:IFA#="" THENRETURN
2060 GOSUB9200:IFNX<0 THEN2030
2070 GOTO9000
3000 GOSUB9100:OPEN1,1,1,B#:PRINT#1,B#,CR#:
3010 PRINT#1,WZ(V):CR#:
3020 IFWZ(V)=0 THENCLOSE1:PRINT"SAVED":GOTO9000
3030 V=V+1:GOTO3010
4000 GOSUB9100:OPEN1,1,0,B#:INPUT#1,B#:PRINT#
4010 INPUT#1,WZ(V)
4020 IFWZ(V)=0 THEN CLOSE1:PRINT"LOADED":GOTO9000
4030 V=V+1:GOTO4010
5000 PRINT"TEMPO=":S
5010 PRINT"NEW TEMPO=":INPUTS:IFSC<1 THEN5010
5020 RETURN
6000 PRINT" ":END
8000 GOSUB9500:GOSUB9200
8010 PRINT"CHOICES:"
8020 PRINT"CONTINUE"
8030 PRINT"REPLAY"
8040 PRINT"BACK UP 1 NOTE"
8050 PRINT"PRINT WHICH?"
8060 GETA#:IFA#="" THEN8060
8070 IFA#="C" THEN V=V-1:GOSUB9200:GOTO9500
8080 IFA#="R" THENGOSUB2000:GOTO8010
8090 IFA#="B" THEN8060
8100 IFV=100 THEN8060
8110 V=V-1:GOSUB9200:GOSUB9800
8120 GOSUB9500:GOTO8060
9000 FORI=1 TO700:NEXT:RETURN
9100 PRINT"WHAT IS THE NAME OF THE SONG"

```

(continued)

```

9110 V=1:INPUTB#:RETURN
9200 X=WZ(V)
9210 R=INT(X/1000):CR=RG+R
9220 V=INT(X-R*1000)
9230 NP=INT(V/100)
9240 D=INT(V-NP*100)
9250 N=ASC(NP):RETURN
9500 FORI=0 TO2:POKERG+I,0:NEXT:RETURN
9700 IFD>99 THEND=99
9710 WZ(V)=INT(R*10000+NP*100+D)
9720 RETURN
9800 POKECR,ASC(NP):FORI=1 TO(S*#D):S:NEXT:RETURN
10000 PRINT"LOAD SONG"
10010 PRINT"VIC PLAYER"
10020 PRINT"PLAY SONG":PRINT"REPLAY SONG"
10030 PRINT"SAVE SONG":PRINT"LOAD SONG"
10040 PRINT"CHANGE TEMPO":S=" "
10050 PRINT"QUIT"
10060 PRINT"CHOOSE?":RETURN
11000 PRINT"PLAY WHEN READY"
11010 PRINT"SPACE BAR TO PAUSE":PRINT"CRSR TO END SONG"
11020 PRINT"
11030 PRINT"
11040 PRINT"
11050 PRINT"
11060 PRINT"
11070 PRINT"
11080 PRINT"
11090 PRINT"
11100 PRINT"
11110 PRINT"
11120 PRINT"
11130 PRINT"
11140 PRINT"
11150 RETURN
12000 S=50:L=260:DIMWZ(L):ASC(38),NP%(50):CR#=CHR%(13)
12010 RG=36874:FORI=0 TO2:POKERG+I,0:NEXT
12020 POKE36879,15
12030 RESTORE
12040 FORI=0 TO99:READA%(I):NEXT
12050 FORI=0 TO50:READNP%(I):NEXT
12060 R=1:CR=RG+R:RETURN
13000 DATA135,143,147,151,159,163,167,175
13010 DATA179,183,187,191,195,199,201,203
13020 DATA207,209,212,215,217,219,221,223
13030 DATA225,227,228,229,231,232,233,235
13040 DATA236,237,238,239,240,241,0
14000 DATA36,34,12,38,14,16,32,38,18,20
14010 DATA22,38,25,27,38,30,15,38,38,38
14020 DATA14,16,35,38,7,4,3,21,38,6,8,29
14030 DATA10,38,13,11,9,31,33,17,23,1,24
14040 DATA28,5,19,2,26,0,38,37

```

# PERRY PERIPHERALS REPAIRS KIMs!!

## (SYM<sub>s</sub> AND AIM<sub>s</sub> TOO)

- We will Diagnose, Repair, and Completely Test your Single Board Computer
- We Socket all replaced Integrated Circuits
- You receive a 30-day Parts and Labor Warranty
- Your repaired S.B.C. returned via U.P.S. — C.O.D., Cash

Don't delay! Send us your S.B.C. for repair today  
Ship To: (Preferably via U.P.S.)

**PERRY PERIPHERALS**  
6 Brookhaven Drive  
Rocky Point, NY 11778

### KIM-1 REPLACEMENT MODULES

- Exact replacement for MOS/Commodore KIM-1 S.B.C.
- Original KIM-1 firmware — 1K and 4K RAM versions

### REPLACEMENT KIM-1 KEYBOARDS

- Identical to those on early KIMs — SST switch in top right corner
- Easily installed in later model KIMs

*Perry Peripherals is an authorized HDE factory service center.*

*Perry Peripherals carries a full line of the acclaimed HDE expansion components for you KIM, SYM, and AIM, including RAM boards, Disk Systems, and Software like HDE Disk BASIC V1.1. Yes, we also have diskettes. For more information write to: P.O. Box 924, Miller Place, NY 11764, or Phone (516) 744-6462.*


Circle No. 47

**WE TOOK  
A BIG  
BYTE  
OUT OF  
COMPUTER  
PRICING!**

**ORDERING INFO**  
We accept Visa, Mastercard, Money Orders or Certified Check. Personal checks require 2 weeks for bank clearance. All items factory fresh & carry manufacturer's warranty. Prices subject to change without notice.

### SPECIALS OF THE MONTH

**OKIDATA 82A**  
**\$419.**



**COMMODORE 64**  
**\$ CALL**



**ATARI 800**  
**\$ NEW LOWER PRICE!**



#### COMPUTERS

ATARI 400.....	\$197.
ATARI 800.....	\$598.
ATARI 410.....	\$74.
ATARI 810.....	\$439.
COMMODORE 64.....	CALL
COMMODORE VIC 20.....	\$149.
COMMODORE VIC 1530.....	\$69.
NEC PC 8001A.....	\$739.
NEC PC 8012A.....	\$499.
NEC PC 8031A.....	\$739.
SANYO MCB 1000.....	\$1599.
TIMEX 1000.....	\$84.
XEROX 5 1/4".....	CALL
XEROX 8".....	CALL
XEROX 630.....	CALL

#### DISKETTES

BASF.....	CALL
MAXELL.....	CALL

#### TERMINALS

TELEVIDEO 910.....	\$589.
TELEVIDEO 950.....	\$945.

#### PRINTERS

DIABLO 620.....	\$1199.
DIABLO 630.....	\$1675.
OKIDATA 82A.....	\$419.
OKIDATA 83A.....	\$699.
OKIDATA 84P.....	\$1029.
EPSON.....	CALL
NEC 8023.....	\$479.

#### SOFTWARE

MICROSOFT.....	CALL
MICROPRO.....	CALL
ALL MAJOR BRANDS.....	CALL

**COMPUWAY, INC.**

24 LUMBER ROAD  
ROSLYN, N.Y. 11576

toll free **800 645 1362**  
**516 621 1362**





variable, then requests and inputs a new value. If the value is less than 1, it is ignored. When a valid value is input, the routine returns to the main program.

The QUIT routine (line 6000) clears the screen and executes an END to return to BASIC.

The PLAY SONG MENU routine (lines 8000-8120) provides three additional commands for use while playing a song. When called by pressing the space bar, it first uses a subroutine to turn off all sound generators and another to unpack the current note. It prints its own menu and waits for a keyboard selection. On receipt of a 'C' it backs up the song pointer to the current note, unpacks the note, and turns off the sound generators before returning to the PLAY SONG routine.

The letter 'R' calls the REPLAY SONG subroutine, which plays the current song from the beginning to the current note, and then waits for another menu selection.

The letter 'B' causes the song note pointer to back up one position, unless it is already at the start of the song, and then go to the subroutines to unpack the note's values, output the note for the correct duration, turn off the sound generators when the note is done, and wait for another menu selection.

The support subroutines (lines 9000-13020) provide support for the main program and major subroutines.

Line 9000 provides a several-second delay to permit you to view messages.

Line 9100 prints 'WHAT IS THE NAME OF THE SONG?' and accepts a name from the keyboard.

Line 9200 unpacks the stored note information into its three components: the song register 'R', the note pointer 'NP', and the duration of the note 'D'. It also sets the correct song register and looks up the actual note from the note table. See 'packing information' in the section headed "Numeric Variables."

Line 9500 turns all three song registers off by setting them to 0.

Line 9700 makes sure that the note duration is not greater than 99 and packs the three components of the note (the song register 'R', the note pointer 'NP', and the duration of the note 'D') into a single integer value in the song array. See 'packing information' under the heading "Numeric Variables."

Line 9800 outputs a note by placing its value in the current sound generator. It waits for the duration of the note, which is calculated as the tempo 'S' times the note duration 'D' divided by 8, times the length of the BASIC FOR...NEXT loop.

Line 10000 prints the main menu.

Line 11000 prints the keyboard display.

Line 12000 performs a series of initialization functions. It sets the tempo 'S' to 50 and the length of the song 'L' to 260 notes; it dimensions three integer arrays — [W%(L) to hold the song note information, and A%(38) and NP%(50),

which associate the keyboard characters with the notes; it turns off all three sound generators and sets the sound volume to its maximum value of 15; it restores the DATA statement pointer and reads the DATA into the A%(I) array and the NP%(I) array; and it sets the middle sound register as the current register and returns to the main program.

Line 13000 contains the data for the values of each of the notes (three octaves plus two notes, C through C#). The zero at the end is the entry for a rest. These values correspond to the values in the VIC programming manual. Note that they vary slightly from the values in the VIC reference manual.

Line 14000: This data table has the pointers for the keyboard playing routine. Since the keyboard is not in note order and the note table values are in note order, it is necessary to convert from the keyboard code to the position in the note table. For example, 'Z', which is a 'C', has the keycode 90. This number is called the ASCII value and is a standard form of encoding the keys for a computer. Line 1090 subtracts 42 from 90, resulting in 48 as the keyboard position. (The first 42 keycodes are unused, and so we throw them away.) If you look at the table of pointers, you will see that the 48th entry is '0'. Therefore, the note pointer for Z is 0. If you look at the note table data, you will see that the zeroth (first) entry in this table is 135. This is the value to be POKEd to make the sound 'C'.

## Programming Concepts

### Using a Menu to Make a Choice

#### 1. Selecting by Number

When you run the PLAYER program, the first display that you see is a list (or menu) that tells you what actions are available. Each item on the menu is selected by pressing the number associated with it. The BASIC program steps required to make the choice are in lines 40 and 50.

```
40 V = VAL(A$):IFV < 1ORV > 6THEN30
50 ONV GOSUB1000,2000,3000,4000,5000,6000:
   GOTO20
```

Line 40 converts the keyboard character in A\$ to its numeric value in variable V. If V is less than 1 or greater than 6, then the number is ignored and the program returns to line 30 to get another choice from the keyboard.

Line 50 uses ON V GOSUB to go to the subroutine whose position matches the number: the first subroutine address for a 1 (subroutine 1000), the second subroutine address for a 2 (subroutine 2000), and so forth for numeric values of 1 through 6.

#### 2. Selecting by First Letter

If the space bar is pressed during the 'PLAY SONG', then another menu is displayed.

(continued)



# THE MICRO COMPUTER BUSINESS WILL GROW FROM \$10 TO \$100 BILLION IN THE NEXT EIGHT YEARS! ARE YOU READY TO CASH IN?

The micro computer business is predicted to grow from its present \$10 billion to \$100 billion before 1990! Imagine the possibilities this opens for you! No matter where you live, if you're starting up or presently in business, **no other industry offers you more opportunities!**


Now, finally, all the inside information you need to secure a prosperous future in this dynamic industry is available in **one place - THE COMPUTER ENTREPRENEUR MANUAL!** - An immense information source, compiled by our inquisitive research team, aided by a panel of **experts and business people from all areas of the computer industry!**

We present the inside story of **more than 100 lucrative computer businesses you can enter**, where you'll find the **real opportunities** for the eighties: from one man operations like **Programming Author, Word Processing Center or Consulting, to Systems House, Service Bureau, Computer Store etc!** Many at little or no investment! All the invaluable facts and figures: **How to start, Capital needs, Profit estimates and Margins, How to Sell and Market, How missing technical or business experience need not stand in your way, Source of Suppliers, etc!** Details that could take years to find out on your own!

We'll show you **inside tricks**, like how to **never again pay retail** for computer products and consumer electronics, **even for one item - right now**, while you're starting your business! How to get **free merchandise** and trade show **invitations, etc.** This alone will **more than pay for the manual!** You'll read **actual case histories** of other computer entrepreneurs, so you can **learn from their mistakes, and profit from their success stories!** Where you'll be **one year from now depends on your actions today!** Let us show you **how to take the first crucial steps!**

Order now and take **advantage of our limited introduction special, THE COMPUTER ENTREPRENEUR MANUAL**, and a **six month subscription to THE COMPUTER ENTREPRENEUR REPORT/NEWSLETTER** ( so you're **always up-to-date** with the industry ), **both for only \$29.95!** You must be convinced on **how easy** you can **strike it rich** in the micro computer business - or you may **return the manual for a full refund** within thirty days! **USE OUR TOLL FREE NUMBER TO ORDER!**

## EVERYTHING YOU NEED TO KNOW TO SUCCEED IN THE COMPUTER BUSINESS IS ALL IN THIS MANUAL!

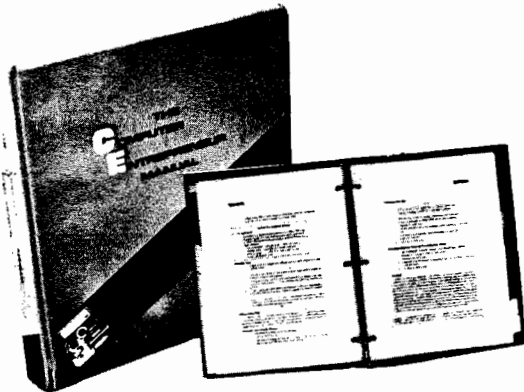

**THE COMPUTER ENTREPRENEUR MANUAL** has the answers to all your questions about **selecting, starting and successfully running a computer business!** There has **never** been such a **comprehensive collection of know-how and information** about this business in **one place!** All the **facts you need to plan and achieve your goals in easy-to-follow, step-by-step instructions!**

These are some of the **100-plus businesses** covered in **PART ONE** of the manual, with the facts on **How to start and run, Start-up Cost** ( Even how to operate on a shoestring ), **What profits to expect, Wholesale prices, Mark-ups, Suppliers, future outlook, case histories for each, etc:**

**Systems House, Software Author** ( who to sell to and who to avoid ), **Service Bureau, Software Publisher** ( How to find programs that sell, **Word Processing Service, Consulting and Consultant Broker** ( use your skills or those of others, **make \$150 - \$1000 a day!** ), **The incredible Games Business, Computer Store** ( Franchises: Pro and Contra, or a low inventory store in your home! ), **OEM, Hardware Mfg, Data base and Teletext Service** ( big prospects! ), **Used Computers, Repairs, Rent-A-Computer, Promote Fests and Trade Shows, Turnkey Systems,**


**Bartering, Mail Order, Compile and rent mailing lists, Specialized Data Headhunting and Temp Help Service, Tech Writer Shop, Custom Engineering, The highly profitable Seminars and Training Business, and many more!**

Many **new ideas and ground floor opportunities!** Interviews and **success stories on companies of all sizes!** **Privy info on the profits made:** How some **computer store operators net \$100 - \$250,000!** Little known outfits that made their owners **millionaires**, one of these low-key companies, making simple boards, went from nil to **\$20,000,000 and 100 employees in four years!** Programmers that make **\$300,000, Thousands of micro millionaires** in the making, etc!

Whatever your goal is - **Silicon Valley Tycoon**, or just a **business at home** - we **guarantee** you'll find a **business to suit you - or your money back!**

**PART TWO** of the manual is **loaded with the know-how and "streetfighting" savvy** you need, both as a **novice or business veteran**, to get started, to **stay and prosper** in the micro computer business! **A goldmine of information** in clear and easy-to-use instructions: How to **prepare your Business Plan, Outside financing, The mistakes you must avoid, How to hire and manage employees, Incorporation** ( when, and how to do it cheaply ), **Surviving bad times, Record Keeping, how to estimate your market before you start, Use multiple locations to maximize profits, how to promote and stay steps ahead of the competition!** How to get **free advertising, free merchandise, free advice, Power negotiating** with suppliers to **double your profit margins, etc!** Even how to **keep a present job while starting a business part time!**

**Don't miss this opportunity** to be part of this great industry - the next success story could be **your own!** Order the manual today! Part one and two, bound in a **deluxe ring binder**, where you can also collect our newsletter ( **free for six months with the manual - a \$32.50 value!** ) - all for only **\$29.95!**

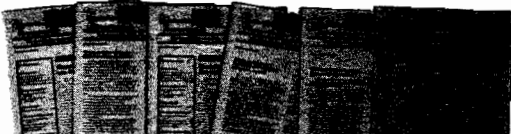

### THE COMPUTER ENTREPRENEUR NEWSLETTER - ALL THE LATEST INSIDE BUSINESS NEWS! NOW! SIX MONTHS FREE WITH YOUR MANUAL!

You're **always attuned** to the industry, and your **manual kept up-to-date, with our newsletter!** Each issue has the **latest business news, ideas, new suppliers, our indispensable "watchdog" column on profits, discounts** ( don't miss mfg's promos, like recently, when top video monitor sold at \$80 - that's half wholesale, **one third of the retail price!** ), **the competition, the big deals, etc!** Feature stories with start-up info and case histories on **new micro businesses!**

You'll get **invitations** to trade shows and conventions, the **usage of our advisory service** and our **discount buying service** for your purchases!

You'll find **many items** in our newsletter that will **save you the cost of your manual many times over!**

© 1982, THE COMPUTER ENTREPRENEUR



**CALL TOLL FREE!  
CHARGE IT!  
Credit Card Orders  
( MC, VISA only )  
accepted 24 hours/day  
1-800-227-3800  
Ask for extension 1135  
In California call  
1-800-792-0990**



Order by phone (Credit cards only), or use the coupon:



Mail to **THE COMPUTER ENTREPRENEUR PUBLISHING CO.**  
**PO BOX 456, Grand Central Station, New York, N.Y. 10183**  
Please send me **THE COMPUTER ENTREPRENEUR MANUAL**, and the **six month free subscription to THE COMPUTER ENTREPRENEUR REPORT/NEWSLETTER.** All for only **\$29.95**, plus \$3 for postage/handling ( **NY residents: add \$2.64 for sales tax** ). If I decide not to keep the manual, I may return it within **30 days** for a full refund.

NAME: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

CITY, STATE, ZIP: \_\_\_\_\_

Check or M.O. enclosed Charge to  VISA  MC

CARD#: \_\_\_\_\_

Exp. Date: \_\_\_\_\_

SIGNATURE: \_\_\_\_\_

MM0683



The first character of each item is displayed in reversed video to indicate that the letter is to be pressed on the keyboard to select that choice. Each letter is serviced by its own IF...THEN statement.

```
CHOICES :
CONTINUE
REPLAY
BACK UP 1 NOTE

WHICH?
```

```
8070 IFA$ = "C" THEN V = V - 1 : GOSUB 9200 :
      GOTO 9500
8080 IFA$ = "R" THEN GOSUB 2000 : GOTO 8010
8090 IFA$ < > "B" THEN 8060
```

If there are only a few choices, as in this example, that is not a lot of code. If there were many choices, then the amount of code to service the letters could be significant.

### Numeric Variables

VIC BASIC handles two kinds of numbers — integer and floating point. An integer number is a number without a decimal (123,9999,0,-4387 and so forth). A floating-point number has a decimal point (12.34, 98765.1, 0.0, -435.678 and so forth). Often it does not matter which type of number is being used, but it can make a significant difference in some programs.

#### Integers

An integer number in the VIC may be as large as +32767 or -32768. Each integer number that the program stores requires two *bytes* of memory. An unexpanded VIC has only about 5000 bytes of user memory, so the number of bytes available is limited. Most BASICs identify which information is stored in integer form by using a % after the one- or two-character symbol name. Examples in VIC PLAYER are F1%, F2%, T%, W%, and A%. In VIC PLAYER, W% and A% are arrays — a large number of related values with a common reference. W%, for example, is the memory reserved to save the note, register, and duration of each note of the song. To allow enough memory for a reasonably long song, we found it necessary to perform a few tricks. First, let's examine how *not* to program the storage area.

Each note of the song that you play produces three pieces of information that must be saved by VIC PLAYER:

- the register of the note
- the number of the note
- the duration of the note

We could define a two-dimensional array that contains a floating-point number for each of the three parts of each note: DIM W(299,2) would reserve space for 300 notes, three floating-point numbers per note. How much memory do you think this would take? Well, 300 times 3 is 900. Is that the total number of bytes required? No! Each floating-point number requires five (5) bytes of memory. Therefore, it would take 5 \* 900 or 4500 bytes of memory! There is barely enough space in your basic VIC for the song, and that's not counting the space required for the program itself.

One obvious way to save space would be to store the three parts of each note as integer values instead of floating-point values. Since each integer value requires only two (2) bytes of memory for storage, the total requirement for the 300-byte song would be 2 \* 900 or 1800 bytes. That is better, but it still uses almost half of the memory in your basic VIC, which does not leave much room for the program.

You have to get a bit tricky to squeeze much more out of the song space; but there is nothing wrong with getting tricky when writing programs. In fact, that can be half the fun! To really squeeze the memory in VIC PLAYER we took advantage of the size of the number that a single integer value might hold. An integer requires two (2) bytes of memory, whether it contains 0, 32335, -32334, or whatever. The three values that we need to keep for each note played are: the register number (1, 2 or 3); the note number (0 to 38); and the duration (which is limited to 0 to 99 units). If only we could pack all three of these individual values into a single integer number for storage and then unpack them when we needed to use them. Well, good news — we can!

The technique to pack the numbers is shown in line 9710.

```
9710 W%(V) = INT(R*10000 + NP*100 + D)
```

This equation is not as difficult as it may at first appear.

W%(V) is the address of the integer where V is the number of the note in the song;

INT is the BASIC function that converts a floating point (five bytes, remember) into an integer number (only two bytes);

R \* 10000 multiplies the register value (1 to 3) by 10000;

+ NP \* 100 multiplies the note number (0 to 38) by 100;



+ D adds the duration value (0 to 99).

(continued)

# APPLE HARDWARE

## THE TACKLER™ — DUAL • MODE PARALLEL INTERFACE FOR THE APPLE® 2 BOARDS IN ONE FOR NO MORE COMPATIBILITY PROBLEMS!

An intelligent board to provide easy control of your printer's full potential. Plus a standard parallel board at the flip of a switch — your assurance of compatibility with essentially all software for the APPLE®. Hires printing with simple keyboard commands that replace hard to use software routines. No disks to load. Special features include inverse, doubled, and rotated graphics and many text control features, available through easy keyboard or software commands. Uses industry standard graphics commands. This is the first truly universal intelligent parallel interface! Change printers — no need to buy another board. Just plug in one of our ROM'S and you're all set. ROM'S available for Epson, C. Itoh, NEC, and Okidata — others available soon. Specify printer when ordering. Call for Price.




## THE UPGRADEABLE PPC-100 PARALLEL PRINTER CARD

A Universal Centronics type parallel printer board complete with cable and connector. This unique board allows you to turn on and off the high bit so that you can access additional features in many printers. Easily upgradeable to a fully intelligent printer board with graphics and text dumps. Use with EPSON, C. ITOH, ANADEX, STAR-WRITER, NEC, OKI and others with standard Centronics configuration. **\$139.00**

## IF YOU WANT GRAPHICS AND FORMATTING THEN CHOOSE THE PERFORMER

for Epson, OKI, NEC 8023, C. ITOH 8510 provides resident HIRES screen dump and print formatting in firmware. Plugs into Apple slot and easy access to all printer fonts through menu with PR# command. Use with standard printer cards to add intelligence. **\$49.00** specify printer.



## THE MIRROR FIRMWARE FOR NOVATION APPLE CAT II®

The Data Communication Handler ROM Emulates syntax of an other popular Apple Modem product with improvements. Plugs directly on Apple CAT II Board. Supports Videx and Smarterm 80 column cards, touch tone and rotary dial, remote terminal, voice toggle, easy printer access and much more. List \$39.00 Introductory Price **\$29.00**

## MINI ROM BOARDS

Place your 2K program on our Mini Rom Board. Room for one 2716 EPROM. Use in any slot but zero. Only **\$34.95**

Circle No. 50

## DOUBLE DOS Plus

A piggy-back board that plugs into the disk-controller card so that you can switch select between DOS 3.2 and DOS 3.3 DOUBLE DOS Plus requires APPLE DOS ROMS. **\$39.00**

# APPLE SOFTWARE

## Super Pix

Hires screendump software for the Epson, OKI, C. Itoh and Nec 8023. Use with Tymac PPC-100. Special **\$19.95** (Specify Printer)

## Mr. Lister — Customer Contact Profiler & Mailer

A Super Mail List Plus more — up to 1000 Entries on single 3.3 Disk (only 1 Drive required) — 2 second access time to any name — full sort capabilities — Dual Index Modes — supports new 9 digit Zip. Easy to follow manual — Not Copy Protected — 4 user defined tables with 26 sort selections per table — Beta tested for 6 months — user defined label generation. Introductory Price \$135. **\$99.00** Dealer & Dist. Inquiries Invited.

## APPLE LINK

A communications system for the Apple® (Requires Hayes Micro Modem). Transmit and receive any type of file between APPLES®, Automatic multi-file transfer, real time clock indicating file transfer time. Complete error check. Plus conversation mode. Only one package needed for full transfers. Compatible with all DOS file types. (requires Hayes Micro Modem) **\$59.00**

## THE APPLE CARD/ATARI CARD

Two sided 100% plastic reference card Loaded with information of interest to all Apple and Atari owners. **\$3.98**

## NIBBLES AWAY II

AGAIN! Ahead of all others.

- **AUTO-LOAD PARAMETERS** . . . Free's the user from having to Manually Key in Param values used with the more popular software packages available for the Apple II.
- **EXPANDED USER MANUAL** . . . incorporates new Tutorials for all levels of expertise: Beginners Flowchart for 'where do I begin' to 'Advanced Disk Analysis' is included.
- **TRACK/SECTOR EDITOR** . . . An all new Track/Sector Editor, including the following features: Read, Write, Insert, Delete Search, and impressive Print capabilities!
- **DISK DIAGNOSTICS** . . . Checks such things as: Drive Speed, Diskette Media Reliability, and Erasing Diskettes.
- **HIGHEST RATED** . . . Best back up Program in Softalk Poll (Rated 8.25 out of 10)
- **CONTINUAL UPDATES** . . . Available from Computer Applications and new listings on the source. **\$69.95**

Dealer and Distributor Inquiries Invited.



**MICRO-WARE DIST. INC.**  
P.O. BOX 113  
POMPTON PLAINS, N.J. 07444

**201-838-9027**

# VIC-20\*

# SOFTWARE SPECIALS

# CBM-64\*

## NEW! CARTRIDGE GAMES FROM TRONIX

**SCORPION** ..... **\$34.95**

Full 4-way scrolling, fast action predator game where it's you against killer frogs, slimy worms, stalker flies, dragons and hatcher pods. With 32 levels of play.

**GOLD FEVER** .. **\$29.95**

Explore a deadly mine searching for valuable gold deposits. Avoid roaming mine carts, rolling boulders and a crazy claim jumper! With 9 levels of play.

**DEADLY SKIES** ..... **\$29.95**

Frenetic, fast paced, action-packed game where you are the Rebel fighter attacking the hostile military base. Avoid S.A.M.'s, smart bombs and deadly radioactive clouds! Over 10 levels of play.

From Interesting Software  
Cassette ..... **\$15.95**



**QUACKERS**

Bring the fun of the shooting gallery into your home. With music and colorful graphics.

## CBM-64 & VIC-20 MINI-MONITOR

All machine code monitor which will disassemble code, do text dump, move memory, hex to decimal and decimal to hex conversion as well as a mini-assembler!

VIC-20 version requires 8K expansion.

Cassette ..... **\$24.95**  
Disk ..... **\$29.95**

## CREATIVE SOFTWARE GAMES ON CARTRIDGE

CHOPLIFTER ..... **\$39.95**  
SERPENTINE ..... **\$39.95**  
APPLE PANIC ..... **\$39.95**  
ASTROBLITZ ..... **\$39.95**  
TRASHMAN ..... **\$39.95**

# Stellar Triumph

Great new all machine code game for your CBM-64. One or two player game with all the arcade sound and graphics! Fantastic space war game with many options.

From H.A.L. Labs . . . tape or disk **\$24.95**

# Dust Covers

Water resistant  
Attractive brown canvas **\$7.95**

# KIDS & THE VIC

Great new book to add to your library.  
only ..... **\$14.95**



## INTERESTING SOFTWARE

21101 S. Harvard Blvd. Torrance, CA 90501  
213-326-9422

Use MC One & Money Order. Add \$2.00 Postage & Handling. CA residents add appropriate sales tax. Dealer Inquiries Invited.

At Last! Two new ways to expand the usefulness of your Rockwell AIM or Cubit CPU computer are available for immediate, off-the-shelf delivery.

To discover how two new, state-of-the-art circuit cards from Design Dynamics can expand the use you get from your AIM or Cubit computer by providing bus compatible Analog to Digital Interface and Full Color Graphics, please read on.

Until now, if you needed a complete Analog to Digital Interface or Full Color Graphics display for your AIM or Cubit computer, you had to design and build it yourself.

But today, Design Dynamics fills each need on 4½" x 6½" cards. Just look at the features packed into each card:

#### A total control interface

The AIM/Cubit-compatible interface has been designed to provide you with a flexible, total control interface which includes A to D functions, D to A functions, a clock with user ports section and a User Prototyping Area. Circuit Card with all functions, \$1,100.

#### Boards with selected functions

Analog to digital input is handled on 16 channels with 12 bit resolution. Maximum conversion time is 35 µsec. per channel. Card with only A to D function, \$375.

Digital to analog output provides control of 0 to 10 Volts. 8 µsec. conversion is provided by double-buffered, 4 channel, 12 bit D/A converters. Card with only D to A function, \$675.

A 24-hour time of day clock, with independent crystal time-base, includes an alarm mode for scheduling events. Two 16 bit timers, each with 16 bit prescaler and start/stop control can count multiple source pulses.

And, a User Prototyping Area provides power, ground bus and grid area for custom signal conditioning. Clock with Prototyping Area Card, \$275.

Start-up software for each circuit card is provided.

#### Full Color Graphics

Now you can expand your system display from limited alpha-numerics to a full color CRT display which includes two graphic modes, multicolor mode and text mode, viewed on your own color CRT.

Design Dynamics Full Color Graphics uses no system RAM, and includes its own 16K dynamic RAM memory. It provides 35 planes of vertically stacked display, 32 sprites in front of graphic plane and internal anti-collision management.

Graphics I provides pattern graphics in 15 colors, 256 x 192 pixels; while Graphics II offers more complex colors and patterns. The Multicolor mode displays in positions of 64 x 48, with four colors per 8 x 8 pattern. The Text mode pattern plane is broken into 40 x 24 positions for text-only display. Full Color Graphics Card, \$175.

Startup software included assists the user in becoming familiar with the extensive capacities of this board.

#### Full documentation included

A Data Pack which includes full documentation for each board makes it simple to put the A to D Interface and Full-Color Graphics to immediate use. Or, if you need to be sure these boards will fit your applications, you may order the Data Pack separately for only \$15 per card.

#### Motherboard available

A fully buffered Motherboard for system expansion of eight cards allows convenient placement of boards for prototyping. Expansion Motherboard is \$175.

#### Save time, money; call today

Get these AIM and CUBIT function-expanding cards *right now*, or call Jack Schnabel for complete information.

## DESIGN DYNAMICS

1830 Soscol Avenue • Napa, California 94559 • (707) 257-6000

Rockwell AIM is a trademark of Rockwell, International • Cubit CPU is a trademark of Cubit, Incorporated

Circle No. 52



## VIC Player (continued)

All we have done is multiply two of the three parts that we need to save by enough to make sure they do not overlap. This insures that we will be able to unpack the separate parts later. The unpacking is a bit more difficult than the packing, but conceptually it is simple. All we need to do is reverse the packing process. This is accomplished in the following lines:

```
9200 X = W%(V)
9210 R = INT(X/10000):
      CR = RG + R
9220 Y = INT(X - R*10000)
9230 NP = INT(Y/100)
9240 D = INT(Y - NP*100)
9250 N = A%(NP):
      RETURN
```

Line 9200 simply copies the packed value of the note into X.

Line 9210 restores the register number by dividing the packed value by 10000, reversing the original saving process. It also sets the current register (CR) to the new register number.

Line 9220 restores the note number and duration combined value that was 'thrown away' in the previous step.

Line 9230 restores the note number by dividing by 100.

Line 9240 restores the duration by subtracting the note number component.

Line 9250 restores the value of the note by looking it up in the note table, A%(X), using the calculated note pointer, NP.

The above lines of program have taken the single integer value and converted it back into three separate parts. The savings of this method result in a 300-note song requiring only 300 integer numbers to store it, at two bytes per number, for a total storage of 600 bytes. Quite a reduction from the original 4500 bytes!

MICRO™

# DRAW with your JOYSTICK!



Program includes a large "picture library" ready to use as is or modify with joystick. Plotting program included for making perfect circles. On cassette.

**'64 Panorama \$29.95**  
**VIC-Pics \$29.95**

High-resolution pictures with print-out to VIC printer.

Put your hands on creativity with this hi-res software for the VIC or '64. Draw narrow or wide lines, curly or straight, create background patterns, erase mistakes, set colors, add captions, too! Great for graphs and pie-charts. SAVE your creations to tape or disk and print a hi-res copy.



Also available:  
**Smart ASCII**, a software interface for parallel printers. At \$59.95, lowest cost, most flexible interface for VIC and '64. On cassette, with cable and manual.

## NEW for the VIC and '64

### SuperTerm

It's the most powerful terminal emulator so far.

Enjoy the power of the terminal emulator which popular protocols. SAVE time with on-tape, EDIT, PRINT, and other features for parallel printers. Works with VIC and supports all IBM PC compatible standard ASCII and control characters. **SuperTerm** handles sequential program and word processing files. On cassette, transferable to disk. When you need professional caliber modem software, think **SuperTerm**.

**SuperTerm** \$99.95  
VIC version \$149.95

**Terminal 40**, the top-rated VIC communications program. Easy to use, VIC printer dump, 16K memory. \$29.95 on cassette.

**'64 Terminal**. Same powerful features as Terminal 40. 24K printing buffer. Only \$29.95 on cassette.



**MIDWEST MICRO Inc.**

ORDER DESK  
(816) 333-7200

311 WEST 72nd ST. • KANSAS CITY • MO • 64114

MAIL ORDER: Add \$3.00 shipping and handling \$3.50 for C.O.D. orders. Add \$2.00 for 1 year warranty and \$1.00 for 2 year warranty. Add 6.25% sales tax. Foreign orders add \$10.00. U.S.A. U.S. Bank ONLY. \$200.00

Circle No. 53

# DISCOUNT COMPUTER SOFTWARE ACCESSORIES

APPLE				ATARI			
Retail	Discount	Retail	Discount	Retail	Discount	Retail	Discount
		Zork I	39.95 29.00	Threshold (d)	\$39.95 29.00	T=Cassette	
Eliminator	\$29.95 21.00	Zork II	39.95 29.00	Snake Byte (d)	29.95 21.00	D=Disk	
War	24.95 18.00	Deadline	49.95 36.00	Space Eggs (d)	29.95 21.00	C=Cartridge	
Adventureland	29.95 21.00	Mastertype	39.95 29.00	Bandits (d)	34.95 29.00		
Pirates Adventure	29.95 21.00	Castle Wolfenstein	29.95 21.00	Color Print (d)	39.95 29.00	Rear Guard (d)	24.95 18.00
Golden Voyage	29.95 21.00	Supertext II	150.00 108.00	Canyon Climber (d)	29.95 21.00	Rear Guard (I)	19.95 15.00
Magic Window	99.95 72.00	Softcard Premium System	775.00 600.00	Shooting Arcade (d) (t)	29.95 21.00	Caverns of Mars (d)	39.95 29.00
Temple of Apschai	39.95 29.00	Wizard and the Princess	32.95 24.00	Pacific Coast Highway (d) (t)	29.95 21.00	Atari Basic (c)	59.95 45.00
Upper Reaches of Apschai	19.95 15.00	Time Zone	99.95 72.00	Clowns And Balloons (d) (t)	29.95 21.00	Star Raiders (c)	44.95 33.00
Curse of Ra	19.95 15.00	Cranston Manor	34.95 25.00	Wordrace (d)	24.95 18.00	Centipede (c)	44.95 33.00
Midway Campaign	16.00 12.00	Threshold	39.95 29.00	Andromeda (d)	34.95 25.00	Pac Man (c)	44.95 33.00
Hi-Res Computer Golf	29.95 21.00	Softporn Adventure	29.95 21.00	Deadline (d)	49.95 36.00	Pilot (c)	79.95 60.00
DOS Boss	24.00 18.00	Crossfire	29.95 21.00	Zork I (d)	39.95 29.00	Temple of Apschai (d) (t)	39.95 29.00
The Arcade Machine	44.95 33.00	Frogger	34.95 25.00	Zork II (d)	39.95 29.00	Upper Reaches of Apschai (I)	19.95 15.00
Star Blazer	31.95 23.00	Laff Pak	34.95 25.00	Alien Swarm (d)	34.95 25.00	Curse of Ra (d)	19.95 15.00
Choplifter	34.95 25.00	Ultima II	59.95 44.00	Action Quest (d) (t)	29.95 21.00	Midway Campaign (I)	16.00 12.00
Serpentine	34.95 25.00	Screenwriter II	129.95 94.00	Ghost Encounters (d) (t)	29.95 21.00	Apple Panic (d)	29.95 21.00
Deadly Secrets	34.95 25.00	Graphics Magician	59.95 44.00	K-Razy Shootout (c)	49.95 36.00	Track Attack (d)	29.95 21.00
Raster Blaster	29.95 21.00	Pie Man	29.95 21.00	K-Razy Kritters (c)	49.95 36.00	Choplifter (d)	34.95 25.00
Bug Attack	29.95 21.00	Fastgammon	24.95 18.00	Ultima I (d)	39.95 29.00	Star Blazer (d)	31.95 24.00
The Home Accountant	74.95 54.00	Congo	34.95 25.00	Ali Baba and Forty Thieves (d)	32.95 24.00	Wizard and the Princess (d)	32.95 24.00
Snack Attack	29.95 21.00	Goldrush	34.95 25.00	Deluxe Invaders (c)	39.95 29.00	Jawbreaker (d) (t)	29.95 21.00
Pig Pen	29.95 21.00	Gorgon	39.95 29.00	Gorf (c)	49.95 36.00	Crossfire (d) (t)	29.95 21.00
Wordrace	24.95 18.00	Beer Run	29.95 21.00	Wizard of Wor (c)	49.95 36.00	Frogger (d) (t)	34.95 25.00
Rendezvous	39.95 29.00	Snake Byte	29.95 21.00	Preppie (d) (t)	29.95 21.00	The Shattered Alliance (d)	39.95 29.00
Russki Duck	34.95 25.00			Tigers in The Snow (d) (t)	39.95 29.00	Battle of Shiloh (d)	39.95 29.00
Horizon V	34.95 25.00			Ghostly Manor (d)	24.95 18.00	Submarine Commander (c)	49.95 39.00
Sargon II	34.95 25.00			Raster Blaster (d)	29.95 21.00		

Intec 32K Board \$75.00  
APPLE Compatible Disk Drive \$265.00  
VERBATIM/DATALIFE Disks \$26.00

### SPECIAL OFFERS

MANY MORE PROGRAMS AVAILABLE

VISA AND MASTERCARD ACCEPTED

TERMS: Send check or money order for total purchase price, plus \$2.00 for shipping. MI residents add 4% tax. C.O.D. accepted.

**STRÖM** SYSTEMS INC.  
P.O. Box 197  
Plymouth, Mi. 48170  
(313) 455-8022

WRITE OR CALL FOR FREE CATALOG  
**PHONE ORDER HOURS**  
4 PM - 9 PM MON. - FRI.  
INCLUDE CARD NUMBER  
AND EXPIRATION DATE WITH  
CREDIT CARD ORDERS.  
INCLUDE TYPE OF COMPUTER.



# An Inexpensive Lightpen for the VIC-20, C 64, and Atari

by David Bryson


## What is a light pen?

A light pen is a simple device that connects to your computer with a wire. With an appropriate program in memory, you can use your light pen for a wide variety of applications. Possibilities include drawing lines or more complicated pictures and selecting items displayed on the screen by simply pointing at them. For instance, you could have a questionnaire with a box displayed next to each possible answer. By pointing the light pen at the appropriate box and pressing the light pen's button you would select that answer. There is an endless variety of game applications.

A light pen works on a very simple principle. The tip contains a light-sensitive phototransistor that senses the light of a TV's beam. The VIC, VIC

II, and ANTIC chips included with VIC-20, Commodore 64, and Atari 400/800/1200 computers (as well as a number of other CRT controllers) continually keep track of the horizontal and vertical position of the TV beam. When the phototransistor detects the passing beam, it sends a signal to the CRT controller, and the current X,Y position is locked into registers that can be read by a program.

Both Commodore and Atari have light pens available. However, if you have very basic soldering and mechanical skills you can construct the inexpensive light pen described by David Bryson in this article. For further help with software, consult the references listed.

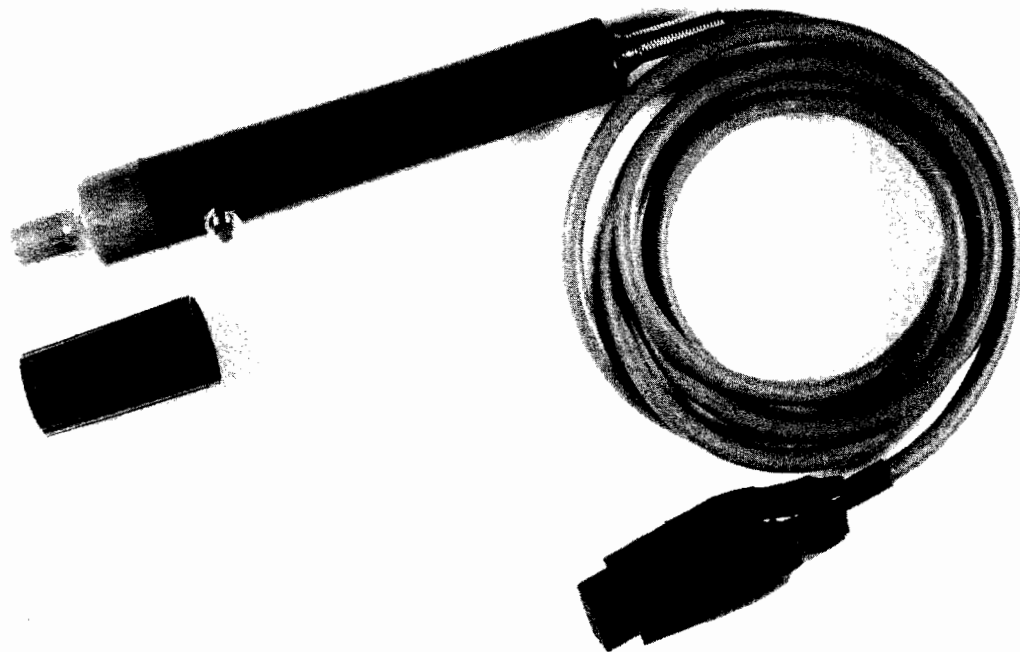



I hadn't found a light pen construction article for the VIC or Atari that produced suitable results, so I decided to design a light pen circuit that was both functional and completely compatible with hardware and software for both microcomputers.

### VIC-20 Light Pen Basics

The VIC chip constantly monitors the location of the electron beam on the CRT screen and stores integer values for both coordinates in memory addresses 36870 (horizontal) and 36871 (vertical). With the light pen held in close proximity to the CRT screen, the phototransistor in the pen tip will produce a negative pulse as the beam passes over the pen tip. This negative pulse in turn latches the X and Y values being monitored by the VIC chip and stores the results in the appropriate memory address. This cycle is repeated for every frame produced by the CRT raster at a horizontal scan rate of 15,750 Hertz. If an accurate measurement of beam location is to be achieved at these frequencies, the optoelectronic device used as the light detector must be capable of a relatively high switching rate with rise and fall times in the unit microsecond range. The Motorola MRD300 phototransistor incorporated in this design has a typical switching time of two microseconds while maintaining a moderate light current sensitivity.

### Light Pen Construction


You need the following parts for construction of the light pen circuit shown schematically in figure 1.

1. Phototransistor, Motorola type MRD300 or equivalent
2. Switch, subminiature SPST momentary contact. Radio Shack #275-1571 or equivalent
3. Resistor, 100Kohm, 1/4 watt
4. Cable, 4 feet, 2 conductor stranded #24AWG with shield. Belden #9397-100 or equivalent
5. Connector, D-Subminiature manufactured by Robinson Nugent Inc. Available from:  
Digi-Key Corp  
Thief River Falls  
MN 56701  
Digi-Key #R700-ND or equivalent
6. Light Pen Main Housing (see text)
7. Jerk Relief Spring (optional)
8. Quick-setting Epoxy Devcon "5-minute" or equivalent

Obtain either a new or used felt-tip marking pen to serve as the light pen main housing. Use a brand with the large diameter body (about 3/4 inch) to insure ample room for internal switch installation. Disassemble the pen by disconnecting the

removable head section; remove the fiber ink reservoir from the main body and the felt tip from the head section. Then clean remnant ink from both pen sections and from the marking pen cover. Save the cover for later use in protecting the delicate tip of the light pen during storage.

Secure the phototransistor in position within the tip assembly and bond to the inside surface with 5-minute epoxy. Use caution during this operation to prevent any glue spillage onto the phototransistor lens area. Note that the lens tip is flush with the tip of the barrel as shown in the pictorial section in figure 2. Drill holes through the barrel end and outside surface to accommodate installation of the cable and switch assemblies. Insert the cable through the hole in the barrel end (with the strain relief spring in place if used) and make the appropriate solder connections between switch, phototransistor, and cable.

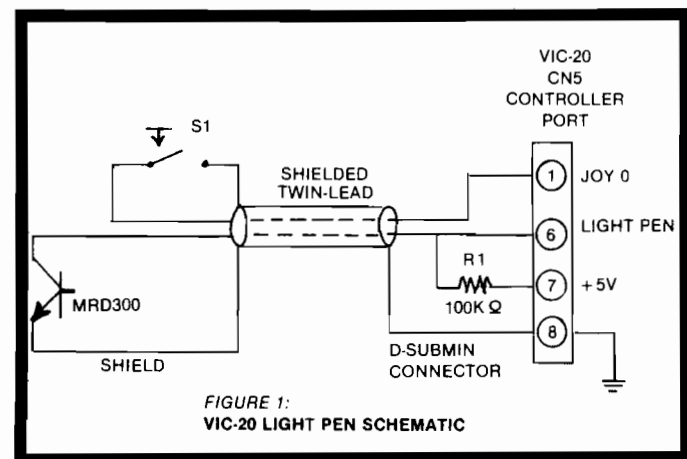

Secure the switch to the barrel assembly with the nut provided. Pour a small amount of 5-minute epoxy into the base assembly to secure the cable at the barrel and exit hole and connect the head assembly to the main body. In some felt tip pen designs, this will be a snap-on connection. Others will require a small amount of cement to secure the two pieces. If your design requires the adhesive, leave the bonding of the two pieces as the final step in pen construction in case problems arise during final test that require troubleshooting the internal barrel assembly.

Prepare the two conductors and shield at the cable end for connection to the D-Subminiature connector. If this type of connector is not readily available and if waiting the two weeks for mail order response is out of the question, consider the following options. If a used D-subminiature connector from an Atari joystick or paddle control is available, it can be used after performing razor blade surgery to relocate the internal pin receptacles to the positions needed for light pen connection. The process is not as difficult as it sounds. If carefully applied razor cuts are made along both



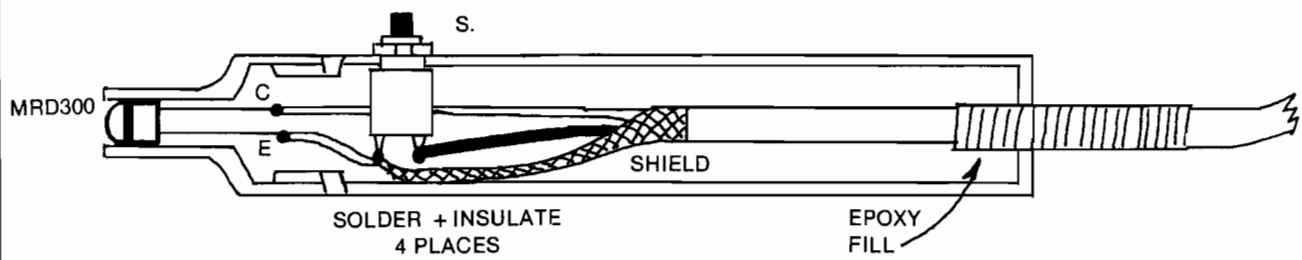


FIGURE 2: PICTORAL SECTION OF VIC-20 LIGHTPEN

edges of the connector, the internal halves hinge open to allow access and switching of the pins. An easier but more expensive alternative is to purchase a Radio Shack D-Subminiature 25-pin female connector (#276-1565) and reshape the connector to fit the VIC receptacle by removing a 16-pin section of the plug body. If this operation is carefully performed, a second 9-pin D-Subminiature connector can be produced from the remnant 16-pin plug section.

Make the required solder connections between cable conductors and connector. Install and solder the 100K ohm resistor between pins 7 (+5V) and pin 6 (light pen) within the connector body. Secure and insulate the connector assembly with electrical tape if necessary.

A photograph of the assembled light pen is presented in figure 3.

### Light Pen Application

Plug the completed light pen into the VIC and type in the following program:

```
10 X = PEEK(36870)
20 Y = PEEK(36871)
30 SW = -(PEEK(37151)AND4)=0
40 PRINT "CLEAR" X;Y;SW
50 FORT = 1TO50:NEXT
60 GOTO 10
```

The run should produce a group of three numbers displayed at the top left corner of the monitor screen. The left value is the contents of the X or horizontal register, the middle number is the contents of Y or vertical register, and the number on the right is either a 0 or a 1 depending on the state of the switch at the tip of the light pen. Note that some adjustment may be required to the brightness and/or contrast controls on the monitor to produce the desired results.

The expression in statement 30,  $SW = \neg[(PEEK(37151)AND4) = 0]$ , instructs the computer to

monitor the state of the port B output register to determine the position of the switch at the light pen tip. By using a compound statement such as

```
100 SW = -((PEEK(37151)AND4) = 0):IF SW = 0
THEN 100
```

the system can be put into a loop awaiting the activation of the light pen switch before proceeding with the next step in the program. One obvious advantage of this scheme is to reduce false input or "noise" caused by ambient light (other than from the CRT screen) producing a light pen signal. With this statement in the program, the pen location registers will only be examined when the switch is depressed. It is also possible to leave this statement out and provide real time screen position monitoring without switch activation, as evident in the six-line light-pen test program presented earlier.

### Further Reading

1. Hale, William. "A Light Pen For Under \$10," *Compute!*, #27 (August, 1982), 141.
2. Loomis, Sumner S. "Let There Be Light Pens," *The Best of BYTE*, Vol. 1, 153-157.
3. Malmberg, David. "Using The VIC Joystick," *Home and Educational Computing*, Vol. 1, Issue 1, 18-24.
4. Malmberg, David. "VIC Light Pen-Manship," *MICRO*, #41 (October, 1981), 54-59.
5. Peck, Robert A. "Basics Of Light Pen Operation," *Compute!*, #10 (March, 1981), 36-41.

---

David Bryson is presently employed as a senior materials engineer-nondestructive testing with the Pratt and Whitney Aircraft Commercial Engineering Division of United Technologies Corporation. You may contact the author at 9 Luster Lane, Enfield, CT 06082.

---



# ADVENTURE. THE KEY IS YOUR COMPUTER

## ADVENTURE PACK I

(3 programs)

**Jack and the Beanstalk** Defeat the Giant in your quest for his Golden Hen.

**Computer Adventure** Re-live the "excitement" of getting your computer. An adventure with a very different flavor.

**Moon Base Alpha** You must find a way to destroy the meteor that is racing towards your base, or else all moon colonies will be demolished!

Available for VIC-20 and COMMODORE 64  
PLAYED WITH KEYBOARD

\$19.95

## ADVENTURE PACK II

(3 programs)

**African Escape** As the sole survivor of a plane crash, you must find your way out of the dark continent.

**Hospital Adventure** You are a spy whose mission is to complete the bungled assassination attempt on the evil dictator, who is recuperating in the hospital under heavy guard.

**Bomb Threat** Get back to town to warn the authorities of the bomb planted by the terrorists who left you prisoner at their hideout.

Available for VIC 20 and COMMODORE 64  
PLAYED WITH KEYBOARD

\$19.95

## KONGO KONG

Climb ladders, avoid the barrels the crazy ape is rolling at you, and rescue the damsel. Fast machine code action.

Available for VIC-20 and COMMODORE 64  
PLAYED WITH JOYSTICK OR KEYBOARD

\$19.95



## GRAVE ROBBERS

Introducing the first GRAPHIC ADVENTURE ever available on the VIC-20! With realistic audio-visual effects, you explore an old deserted graveyard and actually see the perils that lie beyond.

Available for VIC-20 and COMMODORE 64  
PLAYED WITH KEYBOARD

\$14.95




## ANNIHILATOR

Defend your planet against the hostile aliens. All machine code makes this "Defender-like" program one of our best arcade games.

Available for VIC-20 and COMMODORE 64  
PLAYED WITH JOYSTICK

\$19.95



## CHOMPER MAN

High speed machine action. Don't let the bullies catch you in a game packed full of machine code.

Available for COMMODORE 64  
PLAYED WITH JOYSTICK OR KEYBOARD

\$19.95

Programs for the  
VIC-20 and the  
COMMODORE 64



VICTORY SOFTWARE INC.  
7 Valley Brook Road, Paoli, PA 19301  
(215) 296-3787


Check your local dealer or order directly.  
**ORDERING** We accept personal checks, money orders, VISA, and MASTER-CHARGE. Charge orders please include number and expiration date. Overseas orders please use charge or have check payable through a U.S. bank. Add \$1.50 postage and handling per order. PA residents please add 6% sales tax.

All programs fit in standard memory. All programs are on cassette tape.



**Thunder Tector**  
UNINTERRUPTIBLE POWER SUPPLY

TM

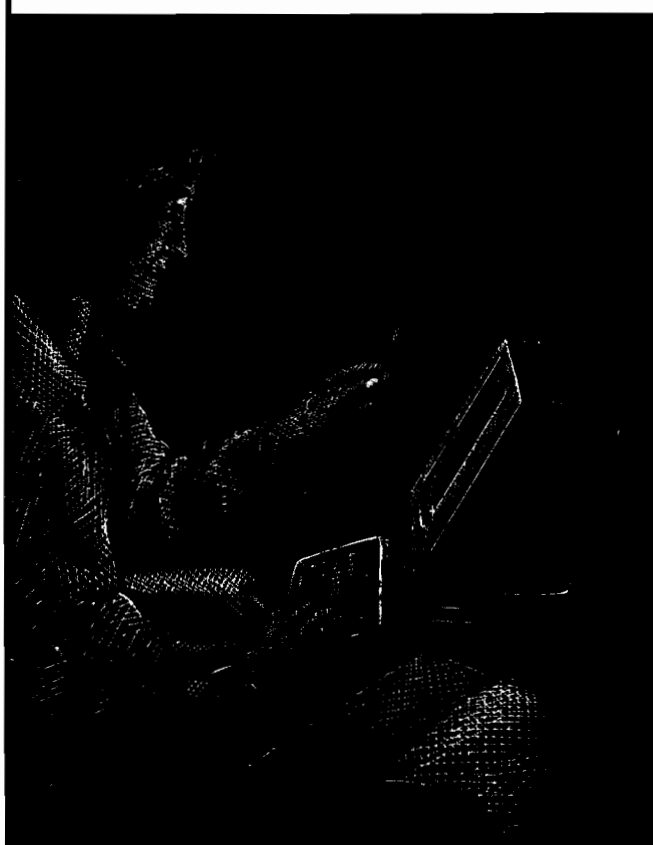

**DON'T BE LEFT IN THE DARK!**  
For \$295, you can protect YOUR  
Data, Time and Computer.

Protect your computer operation from loss of data files, lost keyboard input, and questionable integrity of stored information due to power failure. Operation is completely automatic, just attach your own 12V battery, or purchase below.

Available for:

**Apple, Radio Shack, IBM, Olivetta,  
and most other personal and business computers.**  
Specify equipment to be attached when ordering.

If not completely delighted, return in original condition within 30 days for refund. Ten percent restocking fee will be charged. Ninety-day factory warranty.

Gel battery pack available with cables: 1-amp. computers - \$65; 2-amp. computers - \$111.

For fastest delivery, send certified check or money order payable to "Thunderhawk." Send 10% with C.O.D. orders. Sent FOB, Texas. Price subject to change without notice. Texas residents add 5% sales tax. Broad selection of power ranges available for larger computers — call for prices.

DEALER INQUIRIES INVITED — send on letterhead.

**Thunderhawk Manufacturing (214) 586-6256**  
A Division of Thunderhawk Corporation  
P.O. Box 573  
Jacksonville, TX 75766

© 1983 Thunderhawk Corporation

Circle No. 56

# MICROSPEC

## Quit Playing Games . . .

Disk Based Software to Make Your  
Computer Get Down to Business

**Disk Data Manager**—Create and manage your own data base. Allows you to create, add, change, delete, search, sort, print, etc. Up to 1200 records on a single disk.

VIC 20 . . . 59.95      CBM 64 . . . 89.95

**Payroll System**—Full featured, complete payroll system. Even prints checks.

VIC 20 . . . 89.95      CBM 64 . . . 99.95

**Mailing List**—Up to 1200 records on a single disk. Presorts by Zip Code. Prints on stock up to four labels wide.

VIC 20 . . . 44.95      CBM 64 . . . 54.95

**Inventory Package**—Maintains quantity on hand, cost, sales price, reorder point, etc. Generates suggested reorder, sales report, and sales analysis.

VIC 20 . . . 89.95      CBM 64 . . . 99.95

**General Ledger**—Up to 75 accounts! Generates Balance Sheet, Income Statement, Update Report, etc.

VIC 20 . . . 89.95      CBM 64 . . . 99.95

**Checkbook Manager**—Up to 25 expense categories. Tracks all outstanding checks until they are paid.

VIC 20 . . . 49.95      CBM 64 . . . 69.95

**Commodore 64 and VIC 20**

are registered trademarks of Commodore

**CONTACT YOUR DEALER FOR COMPLETE INFORMATION ON ALL YOUR DISK-BASED SOFTWARE NEEDS**

Send Self-Addressed Stamped Envelope for Catalogue of Games and other Applications

DEALER INQUIRIES WELCOME



P.O. Box 863085  
Plano, Texas 75086

(214) 867-1333



VISA and MASTERCARD Accepted Circle No. 57

## SOPHISTICATED TELE-COMMUNICATION IS HERE

### THE COMMUNICATOR

for 4.0 Commodore Computers

**JIM STRASMA'S REVIEW:**

**"THE BEST TERMINAL PACKAGE I'VE SEEN YET"**

By April 1 (maybe sooner) It Will Be Even Better

SPEEDS UP TO 9600 BAUD

XON — XOFF

TRUE CTRL KEY (we do our own keyboard scan)

**THE HARDWARE** — A printed circuit board; easily installed in the CBM. It uses no CBM connectors; gives a serial port with true RS232C standard.

**THE SOFTWARE** —

— Emulates the ADDS Regent 100, ADM 31 and/or the TeleVideo 950.1 Or choose the VT100 model for use with DEC and VAX computers.

— Runs coresident with BASIC programs; lets BASIC programs and program on host computer communicate to develop realy sophisticated communication and control capabilities.

— The program is on ROM at either address; no disk loading required. Uses only 512 bytes of RAM; will relocate itself around any other machine language program at top of memory.

— Will upload and download and run BASIC programs. With BASIC program will upload and download standard data files. 100 page manual gives program listing for BASIC programs.

Excellent text editor designed to work with THE COMMUNICATOR

**THE COMMUNICATOR \$200**

Text Editor \$40

1200 baud modems beginning at low, low \$385, and even less when purchased with THE COMMUNICATOR

**AMPLIFY, INC.**

**2325 Macbride, Iowa City, Iowa 52240 319-337-8378**

1 trademarks Adds Regent, Inc., Lear Liegler, Inc., Televideo Systems, Inc.

Circle No. 58

THE NEWEST RELEASE FROM ARTISAN SYSTEMS CORP.

DP-09

2MHZ  
OPERATION

DUAL 68B09E  
PROCESSORS

256K DRAM


FLOPPY  
CONTROLLER

6 RS-232  
SERIAL PORTS

WINCHESTER  
INTERFACE

8 28-PIN  
SOCKETS

4 LAYER  
PC BOARD

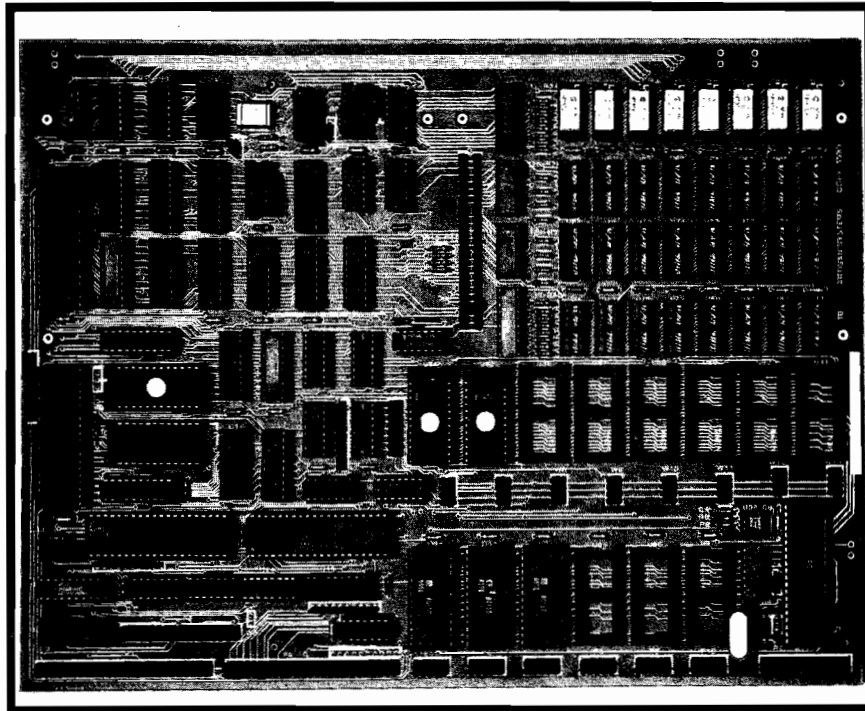

6809 BASED SINGLE BOARD SYSTEM

12"X9"

5V, 4A

±12V, .2A

FEATURES:

- ⊕ 68B09E ADVANCED 8/16 BIT SYSTEM PROCESSOR WITH MEMORY MANAGEMENT HARDWARE ALLOWS FOR ONE MEGABYTE ADDRESS SPACE
- ⊕ 64K - 256KBYTE DRAM
- ⊕ 8 EACH 28-PIN SOCKETS FOR UP TO 128KBYTE EPROM EPROMS CAN BE 2732, 2764 OR 27128 IN ADDITION 2KX8 OR 8KX8 STATIC RAMS MAY BE USED
- ⊕ SIX RS-232 SERIAL PORTS WITH FULL MODEM HANDSHAKE ADVANCED 6551A ACIAs WITH SOFTWARE BAUD RATE SELECT OF 110 TO 19.2KBAUD
- ⊕ 6522A INTERFACE CHIP PROVIDES TWO 16-BIT TIMERS PLUS TWO 8-BIT PARALLEL PORTS (UNBUFFERED)
- ⊕ 8 AUTO-VECTORED INTERRUPTS FOR HIGH SPEED I/O HANDLING
- ⊕ 50-PIN EXPANSION SOCKET

- ⊕ INDEPENDENT 68B09E SUBSYSTEM FOR DISK CONTROL 1-4 FLOPPYS 5" OR 8" SS DS SD DD SASI INTERFACE ALLOWS 5-45MBYTE WINCHESTERS TO BE CONNECTED USING EXTERNAL CONTROLLER THE SUBSYSTEM USES A PROPRIETARY DMA TECHNIQUE FOR HIGH SPEED OPERATION
- ⊕ FLEX OPERATING SYSTEM IS AVAILABLE

PRICES:

DP-09 A&T 64K 4 SERIAL PORTS	\$795(1-9)
FLEX FOR DP-09	\$150
OS-09 LEVEL ONE & TWO	CALL
FORTH	CALL

TERMS:

ALL ORDERS PREPAID, VISA, OR MASTERCARD  
ALLOW 3 TO 4 WEEKS FOR DELIVERY  
ADD 2 WEEKS FOR PERSONAL CHECKS

ARTISAN SYSTEMS CORP.  
410 CROSS ST.  
WINCHESTER, MA 01890  
(617) 721-2109

Circle No. 59

# 68000 ADDRESSING MODES

by Joe Hootman

## Immediate Addressing

**I**mmEDIATE addressing is used to load a constant into a register. As an example, to load the data register D0 with the hexadecimal 55, the instruction that would load D0 immediately with 0055 is given below:

Move.W #\$55,D0. The equivalent opword code which is entered into memory is 303C. The # sign indicates immediate addressing, and the \$ indicates a hexadecimal number.

It is worthwhile at this point to examine the format of the MOVE instruction in the previous example as the format is typical of all the 68000 instructions. The mnemonic MOVE expresses the intention, in this example, of moving data into the data register. The W following the MOVE instruction indicates that it is intended that 16 bits of data be moved into D0. In this particular example the high order byte was zero filled. If the letter following the instruction is a B, one byte of data would have been moved into D0. If the letter following the instruction is an L, a long word (32 bits) would be moved into D0. The size field in the opword designates the length of the data. For each of the different lengths of data to be moved there will be a different opword.

The general format of the MOVE instructions is represented in the following format:

Instruction Mnemonic	Word Size	Source, Defined by the Addressing Mode	Destination, Defined by the Addressing Mode
	B,W,L		

The MOVE instruction moves data from a designated source, in this case the source being the immediate Hex data 0055. The destination of data in this case would be the data register D0. The bit pattern for the instruction opword is (0011 000 000 111 100).

Note that the destination field as defined by the opword for MOVE does not allow for movement of data into the address register. The movement of data to the address registers is accomplished by using the instruction MOVEA. MOVE and MOVEA are identical except that MOVEA uses a fixed code for the mode of the destination. When loading data into the address register using the MOVEA instruction, the sign bit is extended.

The addressing modes clearly cannot be used to implement instructions that make no sense. For example, MOVE instructions cannot be used with addressing modes that have no way to designate the register or memory to be the destination. These addressing modes would include the PC offset, PC indexed, and immediate addressing modes for the destination effective address.

If only a byte is to be loaded into a register, the MOVEQ instruction should be used. The byte of data is included as a part of the opword; the low order 8 bits (0-7) are the data bits of the word.

To load D0 using the MOVEQ instruction the following opcode and opword would be used:

MOVEQ #\$55,D0 (7055 opword code).

Many cross assemblers automatically use MOVEQ for the instruction to MOVE an immediate byte.

## Direct Addressing

Two different direct addressing modes make use of either the address register or a data register. Direct addressing can be used to copy a data register into another data register or an address register. For the MOVE instruction this addressing mode requires that one of the registers be previously loaded with the appropriate data.

For example, if you want to move the contents of A0 to D0, the proper mnemonic is MOVE.L A0,D0. The opword for this instruction is 2008. Note that when dealing with register-to-register transfer of data, byte moves are not allowed. The EXG instruction exchanges the contents of the specified registers.

## Implied Addressing

Many instructions do not need to have the addressing modes specified. This type of addressing is called implied addressing. For example, the Branch always (BRA) instruction always uses the PC register and the PC need not be designated each time.

## Indirect Addressing

Many variations of the indirect addressing modes are implemented in the 68000:

1. Address register Indirect
2. Address register Indirect with Postincrement
3. Address register Indirect with Predecrement
4. Address register Indirect with Displacement
5. Address register Indirect with Index

When using indirect addressing it is assumed that the address register contains the address where the data is located and/or where the data are to be placed. If you want to load the D0 register with the contents of memory locations \$1500 and \$1501, the assumption is made that A0 is loaded with \$1500. To use address register indirect the following mnemonic is used.

MOVE.W (A0),D0

If the address location \$1500 has stored in it AA, then bits 15-8 of D0 will be loaded with AA. Note that the contents of address \$1501 will be loaded into bits 7-0 of D0.

## Address Register Indirect with Postincrement and Predecrement

Many times it is important in a program that an address be either incremented or decremented from a

previously established value. This is particularly true when tables of numbers or other types of tabular data are being searched. In either the post-increment mode or predecrement mode the value of the designated address register is considered to be the base value.

When using the postincrement mode of addressing the base address register is incremented *after* the base address is used. The predecrement mode decrements the base address register and then uses it to point to the desired address. The amount the register is incremented or decremented depends on the size of the operand. Byte increments/decrements by 1, word by 2, and long word by 4. The stack pointer is always incremented/decremented by 2 or 4 to insure that stack pointer stays on a word boundary.

The examples below illustrate the use of the postincrement addressing mode to load data when the size of the word changes from word length data, to byte length data and finally to long word data.

		Memory	
		Address	Data
<b>A. MOVE.W (A0)+,D0 (3018) Opword</b>			
Before execution	After execution	1500	0F
A0 00001500	A0 00001502	1501	01
D0 00000000	D0 0000F01	1502	02
<b>B. MOVE.B (A0)+,D0 (1018) Opword</b>			
Before execution	After execution	1503	03
A0 00001500	A0 00001501	1504	04
D0 00000000	D0 0000000F	1505	05
<b>C. MOVE.L (A0)+,D0 (2018) Opword</b>			
Before execution	After execution	1506	06
A0 00001500	A0 00001504	1507	07
D0 00000000	D0 0F010203	1508	08
		1509	09

Note from this example that the base register A is incremented once for a byte transfer, twice for a word transfer, and four times for a long word transfer. The base register for the predecrement mode is handled in a manner similar to the postincrement mode in that the base register is decremented once for byte data, twice for word data, and four times for long word data.

To illustrate the nature of the predecrement mode of operation, consider an example similar to the previous one.

		Memory	
		Address	Data
<b>A. MOVE.W -(A0),D0 (3020) Opword</b>			
Before execution	After execution	14F5	F5
A0 00001500	A0 000014FE	14F6	F6
D0 00000000	D0 0000FEFF	14F7	F7
<b>B. MOVE.B -(A0),D0 (1020) Opword</b>			
Before execution	After execution	14F8	F8
A0 00001500	A0 000014FF	14F9	F9
D0 00000000	D0 000000FF	14FA	FA
<b>C. MOVE.L -(A0),D0 (2020) Opword</b>			
Before execution	After execution	14FB	FB
A0 00001500	A0 000014FC	14FC	FC
D0 00000000	D0 FCFDFF	14FD	FD
		14FE	FE
		14FF	FF
		1500	0F

The automatic incrementing and decrementing features of the 68000 make the movement of data tables in the memory of the 68000 a relatively straightforward problem. For example, if you want to move data from a table, A0 would be set to the low address of the original table and A1 would be set to the low address of the new table, an instruction MOVE.W (A0)+, (A1)+ would be executed in a loop until the appropriate number of data words were moved. Note the data of the table can be reordered relatively easily by allowing one of the base address registers to predecrement.

### Address Register Indirect with Displacement

Many times it is necessary to retrieve data from a fixed location in a table. The address of beginning or end of the table is loaded into an address register. The fixed displacement, either positive or negative, into the table from the address register is incorporated in the opcode for the address register indirect with displacement.

The displacement is expressed in two's complement form, and thus the effective address can be displaced either up or down from the address established in the base address register. At the end of the execution of this statement the base address register is left unchanged.

The example below illustrates the use of address register indirect with displacement. In this example D0 is to be loaded with data located six locations away from the base address register A0.

		Memory	
		Address	Data
<b>MOVE.W 6(A0),D0 (3028) Opword</b>			
<b>(0006) Postword</b>			
Before execution	After execution	1504	04
D0 00000000	D0 0000607	1505	05
A0 00001500	A0 00001500	1506	06
		1507	07
		1508	08

If the data was to be found in a location 6 less than the base register (\$1500), the instruction would have been written with the displacement in two's complement form.

		Memory	
		Address	Data
<b>MOVE.W -6(A0),D0 (3028) Opword</b>			
<b>(FFFA)</b>			
Before execution	After execution	14F7	F7
D0 00000000	D0 0000FAFB	14F8	F8
A0 00001500	A0 00001500	14F9	F9
		14FA	FA
		14FB	FB
		14FC	FC
		14FD	FD

The offset cannot place the memory at an odd address. For example, the offset cannot be \$5 in the previous example.

*This information was compiled with the assistance of Motorola, Inc.*

*Addressing Modes will be continued next month.*


You may contact Professor Hootman at the University of North Dakota, Dept. of Electrical Engineering, University Station, Grand Forks, ND 58202.

# HEXPAD: UTILITY FOR MACHINE LANGUAGE KEY-INS

This utility redesigns the PET calculator keypad. Use it when you need to type in a published machine-language program.

*by Bob Sullivan*

**H**EXPAD is a fifty-six byte tool that converts your PET calculator pad into a hexadecimal key pad:

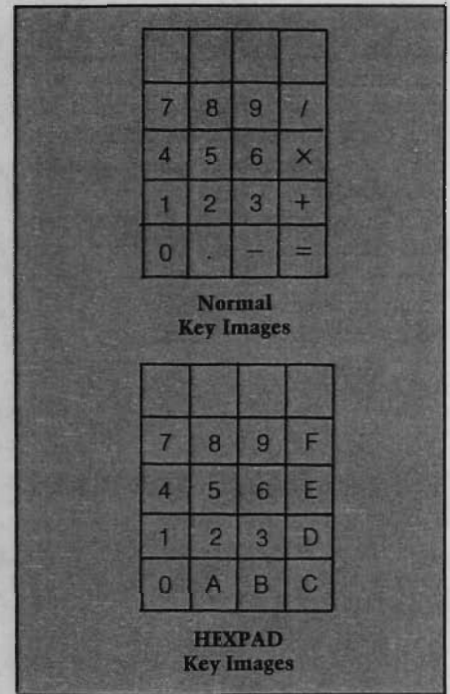

This utility is designed to be used while entering data via the machine-language monitor. It has been used successfully on 4032 and 2001 PETs to type in and save a relocated version of itself. Published machine-language programs such as Micromon, Basic-Aid, or Face can be more conveniently entered with this handy software tool.

HEXPAD is "wedged" into the hardware interrupt routine. It checks to see if the last key entered is a target key or key image to be changed. Whenever a target key is entered, a cursor left and replacement image are immediately printed.

### Entering and Running HEXPAD

Use your monitor or assembler to enter the hexadecimal code for HEXPAD or use your assembler. After you have entered the code, SAVE it to tape or disk. Then check the contents of addresses \$90-\$91.

```
.M 0090 0091
.: 0090 55 E4 XX XX XX XX XX XX
```

If the first two locations don't contain 55 and E4, take note of them, since you must make changes in the HEXPAD.

*(Continued on page 92)*

# VIC-20 USERS: Get Serious With A PROMQUEEN

- A cartridge development system
- Comprehensive manuals
- Program from Commodore VIC-20 keyboard into built-in 4K ROM emulator
- Jumper to target ROM socket
- Test programs in circuit
- Fits EXPANSION PORT
- Includes Hexkit 1.0, a powerful 100% machine code editor/debugger utility program that makes coding for 8-bit Micros a snap.
- Built-in EPROM programmer and power supply
- Burns & runs EPROMS for the Commodore VIC-20, too



Programs 2716, 2732, 2732A, 27C16, 27C32, adaptable to 2532 & 2764

## PROMQUEEN CARTRIDGE COMPLETE ONLY \$199

	US	Canada
Promqueen 64	\$299.00	\$399.00
8K board with 1 EPROM	\$29.95	\$39.95
16 board with 1 EPROM	\$39.95	\$49.95
8K board with 1 EPROM, C64	\$39.95	\$49.95

Send for Free Brochure

## GLOUCESTER COMPUTER, INC.

Circle No. 60

Distributed in U.S. by **Arbutus Total Soft, Inc.**, 4202 Meridian, Suite 214, Bellingham, WA 98226. Phone 800-426-1253, in Washington 206-733-0404

Distributed in Canada by **IBC/Distribution Canada**, 4047 Cambie St., Vancouver, BC V5Z 2x9. Phone 604-879-7812

# ROCKWELL Microcomputers from Excert, Inc.

## • • SPECIALS • •

A65-1 (1K RAM)	\$435
A65-4 (4K RAM)	\$455
A65-4B,4F (4K, BASIC or FORTH*)	\$495
A65-4AB (4K, BASIC & Assembler)	\$525
A65/40-5000 (32K RAM)	\$1250

## LANGUAGES for AIM-65® & AIM 65/40

Assembler	\$35
BASIC ROMs	\$65
FORTH* ROMs	\$65

## ENCLOSURES & POWER SUPPLIES

A65-006	\$175
ENC4A	\$115
ENC5A	\$130
ENC6A	\$140

## Educational Computer Division EXCERT INCORPORATED

- SALES
- SERVICE
- INSTALLATION
- CONSULTING

P.O. Box 8600  
White Bear Lake  
Minnesota 55110  
(612) 426-4114

## RM 65 SERIES

Deduct 5% from list if ordered with AIM 65® or AIM 65/40.

## REPAIR SERVICE

(out of warranty only)  
\$25/hr. plus parts - \$25 min.

## SPARE PARTS

are available



## CASH DISCOUNT -Deduct 5% for Prepaid Orders (we pay shipping)

### TERMS:

Net 30 from approved Companies & Institutions — otherwise COD.  
Shipping will be added to order. Minnesota residents add 6% sales tax.  
Prices subject to change without notice.

### Authorized Dealers for:

ROCKWELL INTERNATIONAL CORP.,  
CUBIT, MTU, FORETHOUGHT PRODUCTS, GORDOS,  
SEAWELL, DYNATEM, APPLIED BUSINESS COMPUTER

AIM-65 is a registered trademark of Rockwell International Corp.  
\*FORTH is a registered trademark of Forth, Inc.

Circle No. 61



Enter 00 and 10 (the starting address of HEXPAD) and press RETURN.

Unless you have a different IRQ address, you are now ready to use HEXPAD. Each time you use the program, you must change the contents of \$90,\$91 to contain the starting address of the HEXPAD routine. Each time you switch back to BASIC you must disable HEXPAD by replacing the IRQ vector. [If you don't, you'll continue to get 'A' when you type a period, etc.]

If the current IRQ address is not \$E455, then line 260 or the object code in line 450 must be changed to aim at the current IRQ address — or else crash:

```
Line 260 IRQ      .DE $E455 (4032)
                  ($E62E-3.0 ROMS)
Line 450 IRQ.JMP  JMP IRQ
                  (4C 55 E4)
```

### Locating HEXPAD

Relocating HEXPAD by changing the object code in lines 470 and 480 relative to the new address:

```
Line 470 JSR KEYCHK2 (20 1C 10)
Line 480 JMP IRQ.JMP (4C 13 10)
```

Or change the beginning assembly address in line 210:

```
Line 210 .BA $1000
```

### The Program

#### Conditions

Lines 330 to 470 include three conditions that must be met before a key image is checked. First, the program checks the column variable in zero page address \$C9. If the cursor is not yet in the tenth column then an image change is not needed. Also, this eliminates problems with those periods that the monitor types in column one. Next, if any keys other than 0 to 9 have not been pressed then the program jumps to the KeyCheck subroutine.

#### KeyCheck

Lines 520 to 580 compare the last key entered [the ASCII code is kept as a

variable in zero page address: \$D9] with the values in 'Table' (lines 740 to 790]. A match causes a branch to the NewKey subroutine.

#### NewKey

Lines 610 to 670 print a cursor left. Next, the table is set up so that the Y-register increment plus #\$3F gives the ASCII value for the desired replacement image. With this value in the accumulator, a JSR to @WRT (\$FFD2) will print the replacement image. The program concludes each time by jumping to the normal IRQ address.

Special thanks to Brent Anderson for helping me get started with ASSM/TED and MAE, and to Jim Strasma for initiating ATUG, which provides assembly-language examples.

The author may be contacted at P.O. Box 2247, Oak Park, Illinois, 60301.

**MCRO**

## GRANITE COMPUTER SYSTEMS

### THE DISASSEMBLER FAMILY

Source listings identical with TSC 6809 EDITOR - User symbol tables - Local and global labels and expressions - Occurance numbered local labels - Easy identification of Data Areas - FCB - FDB - FCC - Step (optional) disassembly one program or data statement at a time - Source code disc or tape for TSC EDITOR input - Run TSC ASSEMBLER with no or minimal editing Monitor and FLEX references are named - Equate table for all external references - Problem codes flagged (6800 & 6502)

Convenient menu driven options carry out tedious error prone disassembly operations - rapidly and accurately.

6809 to 6809 DISASSEMBLER	\$75.00
6800 to 6809 DISASSEMBLER	\$75.00
6502 to 6809 DISASSEMBLER	\$75.00

**TEXTWRITER II** - A complete Text Processor to use with the TSC TEXT EDITOR - The two programs run as one - All features you expect in a full text editing and processing system - (For example: Embed print control characters) - Menu driven  
Disk only \$75.00

**TEXTWRITER I** - A basic Text Processor program to use with the TSC TEXT EDITOR - with most of the features of TEXTWRITER II Specifically for tape systems  
Cassette only \$50.00

**EPROMMER** - Use with the SWTPC MP-R Programmer \$40.00

**FILEMANAGER** - Use with the JPC TC-3 high speed I/O board - comprehensive cassette oriented operating system. \$40.00

All efficient - well documented - and - VERY FRIENDLY  
Run on any SS50 6809 with No or Minimal changes - Provided Object (Binary) programs on 5 & 8 FLEX discs or KC cassette  
Inquire about Color Computer availability - Non-FLEX

**GRANITE COMPUTER SYSTEMS**  
Route 2 Box 445  
Hillsboro, NH 03244 Circle No. 62  
M/C VISA (603)464-3850

## TAYLORMADE SOFTWARE • TAYLORMADE

### Expanded offering of Educational Software for the **COMMODORE 64**

- **Touch Typing Tutor (TTT64)**..... diskette \$24.95  
cassette \$19.95

Ideal for typing students or computer users. Learn to type with all fingers on your computer's keyboard by following the keyboard and finger placement pictured on your TV screen. 19 lessons fully described in 12-page manual. Select PRACTICE and type computer generated pseudo words for your rate and list of errors. Select TEXT and practice English words for timed test of any duration.

### for the **VIC-20**

- **Touch Typing Tutor 3.0 (TTT5K)**..... cassette \$19.95  
Has same features as TTT64 above. Will run on basic VIC. Four separate programs. Enhanced version now provides practice typing English words. Includes 12-page manual. Selected by Denver Public Schools to train 700 elementary students in keyboard skills.
- **Fun Fractions (FF+8K)**..... diskette \$24.95  
cassette \$19.95

The fun way to learn addition, subtraction, multiplication, and division of fractions for grades 4-9 with sound, color, and graphics. Watch VIC show you all the intermediate steps on the screen blackboard. Then take a turn and see if you can answer before the parachute jumper crashes. Three levels of difficulty. Help is given for incorrect answers; learn your score. Requires 8K (or more) memory expansion. Includes 16-page manual.

Foreign orders payable U.S. dollars plus \$3.00 shipping/handling

## TAYLORMADE SOFTWARE



P.O. Box 5574  
Lincoln, NE 68505  
(402) 464-9051



Circle No. 63

Commodore 64 and VIC-20 are trademarks of Commodore Business Machines, Inc.

## TAYLORMADE SOFTWARE • TAYLORMADE

# PUT PRICES IN CHECK

CARTRIDGE RIBBONS FOR  
**APPLE PRINTERS**  
 NEC 8023A  
 C. ITOH PROWRITER  
**\$9.95** EA. **\$107.46** DOZ.

CARTRIDGE RIBBONS FOR  
**EPSON**  
**MX-80 MX-100**  
**\$6.99** EA **\$11.95** EA  
**\$86.29** EA **\$129.06** DOZ

**MAXELL**  
**DISKETTES**  
 5 1/4" SINGLE SIDE  
 DUAL DENSITY  
 MD-1  
**\$29.90** 10 PACK

**INNOVATIVE**  
**CONCEPTS**  
**FLIP'N'FILE**  
 DISC STORAGE BOX  
 HOLDS UP TO 60 DISKETTES  
 5 1/4" 8"  
**\$24.95** EA **\$29.95** EA

RIBBONS FOR  
**IDS PRINTERS**  
 EA DOZ  
 440 \$2.77 \$29.92  
 PAPER TIGER \$6.95 \$75.06  
 MICROPRISM \$7.99 \$86.29  
 PRISM 10.95 118.25

**DISKETTE**  
**STORAGE**  
**BOXES**  
 5 1/4" - BLUE OR BEIGE  
**\$2.49** EA.

DUAL SPOOL RIBBONS FOR  
**OKIDATA**  
**PRINTERS**  
 80, 82, 83 EA DOZ  
 92, 93 \$2.77 \$29.92  
 84 \$5.99 \$64.69

**MEMOREX**  
**DISKETTES**  
 5 1/4" SINGLE SIDE - DUAL DENSITY  
**\$24.99** 10 PACK

**COLOR-**  
**CODER**  
 LIBRARY CASE SET  
 CONTAINS 5 BRIGHT COLORS  
 5 1/4" 8"  
**\$19.95** SET OF 5 **\$23.95** SET OF 5

**ANTI-STATIC**  
**SPRAY**  
 FULL QUART SIZE  
 WITH DISPENSER  
**\$6.95** QT.  
**1 GALLON REFILL \$19.95**

CARTRIDGE RIBBONS FOR  
**COMREX**  
**DAISYWRITER 2000**  
**\$2.49** EA **\$26.89** DOZ

**LABEL**  
**SPECIAL**  
**\$2.99** / K  
 (5K MIN)  
 1 ACROSS 3 x 15/16 CONTINUOUS LABELS

**MOST RIBBONS AVAILABLE IN COLORS TOO!**  
 CALL OR WRITE FOR OUR SUPPLIES CATALOGUE  
 ON ORDERS UNDER \$14.00 PLEASE ADD \$3.00 FOR SHIPPING  
 MINIMUM RIBBON ORDER \$30.00 OR 1 DOZEN



**Check-Mate**™

TOLL FREE 800-343-7706  
 IN MASS 617-963-7694  
 PHONES OPEN 9AM-7PM EASTERN TIME  
 No. 61 - June 1983

51 DIAUTO DR. P.O. BOX 103  
 RANDOLPH, MA 02368  
 MICRO

Circle No. 64  
 MASS RESIDENTS  
 ADD 5% SALES TAX  
 93

# Parameter Passing in Assembly Language

## Part 2

by Randall Hyde

### Passing Parameters *via* the Return Address

The most convenient way to pass constants to a subroutine is to follow the JSR instruction with the parameters. A prime example is the PRINT subroutine, which prints a string to the output device. On the 6502, PRINT is usually called in the following manner:

```
JSR PRINT
BYT "PRINT THIS STRING",0
```

The PRINT subroutine would send each character that follows the JSR PRINT statement to the console output device. Normally such a construct would not be allowed in assembly language. After all, on return the 6502 microprocessor would attempt to execute the ASCII character "P" as an instruction code. With a certain amount of trickery this problem can be avoided. Consider the following 6502 subroutine:

```
PRINT STA ASAVE ;Save Acc value
      STY YSAVE ;Save Y reg val
      PLA ;Get LO byte of
      ;rtn adr
      STA ZPAGE ;and save in a
      ;zero-page loc
      PLA ;Get HI byte of
      ;rtn adrs
      STA ZPAGE + 1 ;and save in a
      ;zero-page loc
      ;
      INC ZPAGE ;Add one to the
      ;rtn address
      BNE 1 ;so it points at the
      INC ZPAGE + 1 ;true rtn addr
      LDY #0
      1 PRTLOOP LDA (ZPAGE),Y ;Fetch each
      ;character until
      BEQ ALLDONE ;a zero byte
      ;is found
      JSR PUTC ;Print character
      ;character
      INC ZPAGE ;Move to the next
      ;character
      BNE PRTLOOP
      INC ZPAGE +
      JMP PRTLOOP
```

```
;
; Zero byte detected. Use this address as the
; new return address
;
ALLDONE LDA ZPAGE + 1
      PHA
      LDA ZPAGE
      PHA
      LDA ASAVE ;Restore acc
      LDY YSAVE ;Restore Y reg
      RTS ;Return to loc
      ;just past zero
      ;byte
```

Whenever you jump to a 6502 subroutine, the return address left on the stack is the address of the next instruction, *minus one*. By POPping the return address off the stack and adding one to it you have a pointer to the data that follows the JSR statement. In the previous example this pointer was used to fetch the characters one at a time until a zero-terminating byte was encountered. Once the zero byte is encountered the pointer to the zero byte is pushed back onto the 6502 stack to be used as the new return address. Since the 6502 expects the true return address minus one to appear on the stack, upon executing the RTS instruction the 6502 continues processing at the instruction immediately past the zero byte.

The PRINT subroutine uses variable length parameters. In this case the end of the parameter list was specified by a special zero byte. Actually, any value can be used to terminate the parameter list as long as that value doesn't appear in the parameter list. Any time a parameter list contains a variable number of parameters, the subroutine being called must be informed as to how many parameters appear on the list. This can be done in one of several ways: you can use a terminating byte (like the PRINT subroutine does) or you can pass to the subroutine some indication of how many parameters are present on the line.

Sometimes a fixed number of parameters will be passed after a JSR instruction. These types of parameters are handled easily. For example, consider the subroutine used to transfer one zero-page location to another:

```
ZTRANS STA ASAVE
      STY YSAVE
      STX XSAVE
      PLA
      STA ZPAGE
      PLA
      STA ZPAGE + 1
      ;
      ; Get data pointed at by first parameter
      ; and store in second.
      ;
```

```
LDY #1
LDA (ZPAGE),Y
TAX
INY
LDA (ZPAGE),Y
TAY
LDA $0,X
STA $0,Y
```

```
CLC
LDA ZPAGE
ADC #2
TAY
LDA ZPAGE + 1
ADC #0
PHA ;Push HI rtn adrs
TYA
PHA ;Push LO rtn adrs
LDA ASAVE
LDY YSAVE
LDX XSAVE
RTS
```

To use this subroutine simply enter the code:

```
JSR ZTRANS
BYT ZPG1,ZPG2
```

and ZTRANS will copy the zero-page memory location pointed at by ZPG1 into the memory location pointed at by ZPG2. [Note: This particular routine is for educational purposes only. The "LDA ZPG1/STA ZPG2" instruction sequence is both faster and shorter and performs the same function.] While ZTRANS isn't a very useful subroutine, it certainly demonstrates how you would pass a fixed number of parameters after the JSR statement.

The 6809, 68000, and 16032 offer additional addressing modes that make picking up parameters after the JSR extremely easy. PRINT coded in 6809 code would look like this:

```
PRINT PSHS A,X ;Save 6809 regs
PRTLOOP LDA [3,S]
BEQ ALLDONE ;Done yet?
JSR PUTC ;If not, output it
INC 3,S ;Increment to
;the next char
BNE PRTLOOP
INC 4,S
BRA PRTLOOP
;
ALLDONE INC 3,S ;Increment to
BNE RTN ;the true rtn
INC 4,S ;adrs
RTN PULS A,X
RTS
```

The PRINT subroutine coded in 68000 code is

```
PRINT MOVEM.L D0/A1, ;Save D0 and
-(SP) ;A1
MOVE.L 12(SP), ;Get rtn adrs
A1
PRTLOOP MOVE.B (A1)+, ;Get char to
```

```
D0 ;print
BEQ ALLDONE
JSR PUTC
BRA PRTLOOP
;
ALLDONE ADDQ.L #1,A1 ;Fix rtn adrs &
MOVE.L A1,12 ;store back on
(SP) ;the stack
MOVEM.L (A7)+, ;Restore
D0/A1 ;registers
RTS
```

The 16032's stack architecture makes performing the PRINT subroutine a relatively simple task. The code for the 16032 PRINT routine is

```
PRINT SAVE [R0] ;Save affected
;registers
PRTLOOP MOVEB 0[4(SP)] ;Get byte to
,R0 ;print
CMPQB #0,R0 ;Check for end
;of string
Beq ALLDONE
JSR PUTC ;Send the char
;to the console
ACBD #1,4 ;Increment
[SP], string
PRT- pointer
LOOP ;and repeat
;loop
ALLDONE ADDQD #1,4 ;Fix return
[SP] ;address
RESTORE [R0] ;Restore the
;affected regs
RTS 0 ;Rtn to caller
```

The MOVB 0[4(SP)],R0 instruction takes the value in the stack pointer and adds four to it. This sum points at the return address for the PRINT subroutine (pushing R0 onto the stack added four bytes to the top of the stack). The data at this address (the PRINT return address) is added to the first value, zero, and the byte at this address is fetched and moved to R0. The ACBD instruction adds one to the return address and then branches to the beginning of the PRTLOOP loop.

Passing parameters of fixed length after the JSR on the 6809, 68000, and 16032 is simple; this exercise will be left to the interested reader.

### Different Methods of Passing Data

Once the mechanics of parameter transfer are mastered, learning how to pass different types of parameters becomes important. Most of the examples presented thus far (with the noted exception of passing the address of a parameter block) passed their parameters *by value*; i.e., the actual data to be used was passed to the subroutine. Three other forms of parameter transfer are pass by value returned, pass by reference, and pass by name.

Passing parameters by value is easy, fast, and doesn't affect variables in the calling procedure. Most pass-by-value parameters are stored in a temporary memory location (or some processor register) during execution of the subroutine. After execution of the subroutine the memory location used to store the parameter often is used for some other purpose. The value contained in the parameter after the execution of the subroutine is lost and cannot be passed back to the calling subroutine. When a subroutine needs to return data to the calling procedure within one of the parameter variables passed to it, then pass-by-value parameters are inadequate.

To return data within a parameter variable you must pass the address of the variable to the subroutine instead of the value it contains. In one of the previous examples where the address of a parameter block was passed, we did just that. The address was used as a pointer to access data in the parameter. Some sort of indirect addressing mode was used to read data from the parameter block for usage within the subroutine. By storing data into this parameter block (again using an indirect addressing mode of some type) data can be passed back to the calling procedure.

There is one problem with passing variables by reference. As an example, consider the following Pascal procedure:

```
PROCEDURE MIXEDUP(VAR I,J:INTEGER);
BEGIN
    I := 5;
    J := 6;
    WRITELN('I+J = ',I+J);
END'
```

Regardless of the input data, you would expect this routine to print "I+J=11" out to the console device. Since I and J are passed by reference (because of the VAR reserved word in the parameter list) the variables I and J actually contain addresses, not data. So any time you access I or J within the procedure MIXEDUP you are actually accessing the memory location pointed at by I or J.

Now suppose you invoke the procedure MIXEDUP with the call "MIXEDUP(L,L)". The parameter I would contain the address of L in the calling procedure as would the parameter J. Upon executing the statement "I=5;" the procedure MIXEDUP would store the value five in the memory location pointed at by I, which

is the variable L in the calling program. Upon executing the statement "J=6;" the procedure MIXEDUP would store the value six in the memory location pointed at by J, which is also the variable L in the calling procedure. Now the variable L contains the value six.

When the expression "I+J" is evaluated, the Pascal procedure will read the value from the memory location pointed at by I (which is L in the calling program), add in the value contained in the memory location pointed at by J (which is also L in the calling program), and print the sum. Since both I and J point at L and the variable L

currently contains six, the sum will be twelve. So "I+J=12" will be printed instead of "I+J=11"! This is one of the major drawbacks to passing parameters by reference.

To overcome the problem demonstrated in this example, many high-level languages (such as FORTRAN) use a parameter-passing technique known as *pass by value returned*. This parameter-passing technique is a combination of the pass-by-value and pass-by-reference methods. In a pass by value returned, the address of a parameter is passed to the procedure and then the procedure copies the data

at that location into some temporary storage location. During the execution of the procedure, any references to such parameters use the temporary storage locations. After the execution of the procedure (but before control is returned to the calling procedure) the value in the temporary location is copied back into the parameter variable whose address is passed. While this method solves the problem found when passing parameters by reference, it is quite inefficient in terms of storage and execution time. Pass by value returned should be used only when absolutely necessary.

The last method discussed here for passing parameters to a subroutine is the *pass-by-name* method. When using the pass-by-name parameter access method, you pass a string containing the name of the variable you wish to access. To retrieve the data stored in the variable you must look up the variable name in a table. Once the variable name is found, some auxiliary information is obtained that provides you with the data you are interested in or tells you where you can find it.

Pass-by-name parameters are used by assemblers, BASIC interpreters, and compilers for symbol-table manipulation. They rarely would be used in a typical assembly-language program, but the method is presented here for the sake of completeness, since the more advanced assembly-language programmers are likely to come across this type of parameter passing now and then.

### Passing Parameters in Your Assembly-Language Programs

As lengthy as this article is, it's only a small treatise on the subject of parameter passing. A considerable amount of time could be spent discussing in more detail the parameter passing techniques mentioned here. Additional topics, like returning function values, could also be discussed. For more information on passing parameters a good reference book of data structures (like Knuth, Vol. 1) is highly recommended. Beyond that, only a lot of experimentation will help you to nail down all the techniques involved in passing parameters to assembly-language subroutines.

You may contact the author at Lazer MicroSystems, Inc., 1791 Capital Unit G, Corona, CA 91720.

o indicates price decrease  
• indicates new item

COMPUTERS	
Apple II-E STARTER SYSTEM	\$1715 <sup>o</sup>
Chameleon Columbia Compact	Our staff know!
Franklin ACE 1000 with color	\$95 <sup>•</sup>
Franklin ACE 1200 - 1 drive, 80 column, Z-80, software	\$1735
IBM PC	Complete systems start at \$2500
Kaypro II w/software	\$1590 <sup>o</sup>
Kaypro II - 400K drives	\$1875
NEC APC HO2 - green/2 drives	\$3050 <sup>o</sup>
NEC APC HO3 - color/2 drives	\$3750 <sup>o</sup>
Osborne Double Density	\$1735 <sup>o</sup>
Simline S-100: Z-80, CP/M, 64K, 2 MByte drives	Under \$2300
Syscom II - Apple II Plus Emulator - not a # @! kit.	\$590 <sup>o</sup>

PRINTERS	
Epson MX-80/FT Type III - STILL AVAILABLE	\$505
Epson MX-100 - w/GraphiX	\$685
Epson FX-80 - 160cps, friction sprocket	\$565
Brother HPR-1A 17cps daisywheel, enhanced	\$715 <sup>o</sup>
F-10 Scanner - 40cps, double copies	\$1185 <sup>o</sup>
Graphic Printer - 50cps, 5x7 matrix, sprocket	\$185 <sup>o</sup>
Mannesmann-Jolly 160L - uses Daisy software	\$775 <sup>o</sup>
NEC 3550	\$1985
NEC 7700	\$2145
Okidata - uses standard speed ribbon	\$405 <sup>o</sup>
OK2 - serial/parallel/fraction/sprocket	\$655
OK4AP - 200cps, 132 column, parallel	\$855
OK2 - 150cps, 80 column, parallel	\$590 <sup>o</sup>
OS - 160cps, wide carriage	\$390 <sup>o</sup>
Prowriter II (C. Itoh 8510A) - 100cps, proportional	\$372 <sup>o</sup>
Prowriter II (C. Itoh 1550A) - wide carriage	\$665 <sup>o</sup>
Gemini 10 - 80 column, 100cps	\$325 <sup>o</sup>
Terminix 15 - 15" wide	\$455 <sup>o</sup>
Terminix #1250 - top of the line dot matrix	\$1550 <sup>o</sup>

VIDEO MONITORS	
Amdek 300G	\$142 <sup>o</sup>
Amdek 300A	\$165
Amdek 310G - for IBM monochrome adaptor	\$175
Amdek 310A - amber for IBM	\$185
Amdek Color 1 - 13" color composite	\$294 <sup>o</sup>
BMC 12" Green - not large, but it works	\$24 <sup>o</sup>
BMC 13" Color - composite	\$294 <sup>o</sup>
BMC 13" RGB with card for Apple II	\$395
Dynax 12" green (GM-120) - BEST BUY	\$129
Dynax 12" Amber (AM-121) - 970 line resolution!	\$145
IBM MONOCHROM	\$245
Priconet Graphics+X-12 RGB for PC	\$485 <sup>o</sup>
Taxan VISION-III - hi-res for IBM & II-E	\$533 <sup>o</sup>

FOR APPLE & FRANKLIN	
Advanced Logic Systems - high performance/low price	
CP/M Card - 256K, CP/M 3.0	\$290 <sup>o</sup>
Z-Card II - list \$189	\$135
Smartarm II - list \$179	\$145
dBase II (requires CP/M)	\$419 <sup>o</sup>
Daevong 10 MByte hard disk - BEST BUY	\$1695 <sup>o</sup>
Daevong 18MByte tape backup	\$1485 <sup>o</sup>
Dumping GX - like GraphiX+	\$1695 <sup>o</sup>
Dumping IBC - graphics and buffer, expandable	\$180 <sup>o</sup>
GraphiX+	\$125 <sup>o</sup>
Hayes Micromodem II	\$275
Hayes Micromodem II with Terminal Program	\$285
Magic Window/WordCalc software pkg.	\$235
Microsoft MULTIPLAN	\$192 <sup>o</sup>
Rana Elite One - YES, it works	\$285 <sup>o</sup>
Rana Elite One Plus - with controller	\$355 <sup>o</sup>
Rana Elite Two - double storage	\$435 <sup>o</sup>
Rana Elite Three - quad storage	\$555 <sup>o</sup>
Serial Interface	\$105
SSM Modemcard w/SOURCE	\$285
SuperCalc	\$155
VISTA QUARTET (2 drives, 512K, 80K controller)	\$615
Vista V-1200, 6MB, removable cartridge system	\$1225
Wordstar	\$185

MODEMS	
Hayes Smartmodem 300	\$215
Hayes Smartmodem 1200 - outsells the rest	\$515 <sup>o</sup>
Novation J-CAT	\$110 <sup>o</sup>
Novation 103/212 SMART (direct connect)	\$285 <sup>o</sup>
Novation 103 SMART (direct connect)	179 <sup>o</sup>
RIXON RX21A - 300/1200 SMART	\$365 <sup>o</sup>

## 64K RAM SETS

3 CHIPS, FOR IBM  
**\$50**  
**PROWRITER**  
 #8510A PRINTER  
**\$372**  
**PC**  
 64K/320K DRIVE  
**\$1975**  
**XT**  
**\$4750**

Some lead. Some don't. Some lurk in the shadows of "CALL" and "we'll beat any price." Being leaders, we've expanded our custom order handling, trained more technicians, and doubled and tripled inventory levels on popular items. Comparisons are welcome.

TELEVIDEO TERMINALS	
TV-916-Pro	\$985
TV-910	\$665
TV-925	\$725
TV-950	\$815
TV-970	\$1395

Verify prices by phone. Add 2 1/2% for Visa or Mastercard. Add 6 1/2% on California orders. Orders prepaid with check, cashiers check, money order or wire transfer are shipped prepaid within the Continental U.S. CO's require 10% non-refundable deposit (re-stocking fee).

# IRONSIDES

## COMPUTER CORP

Customer Service—  
 Product Selection Advice  
 (213) 344-3563  
**ORDERS (800) 528-9537**  
**18905 Sherman Way**  
**Reseda, CA 91355**  
 Visit our new, enlarged showroom.

### NEC APC

Advanced Personal Computer  
 We have the lowest price because we sell the most. Or do we sell the most because we have the lowest price?

### FOR IBM PC

AST HD - II Serial, daisy, Clock	\$149 <sup>o</sup>
AST ControlPlus with 64K, serial, parallel, clock	\$257 <sup>o</sup>
AST MegaPlus 64K serial, parallel, clock	\$282 <sup>o</sup>
AST MegaPlus 256K for MegaPlus	\$345 <sup>o</sup>
Daevong 18MByte Hard Disk	\$1235 <sup>o</sup>
Daevong 18MBYTE TAP (PC or XT)	\$1850 <sup>o</sup>
dBase II - for PC-DOS	\$425
Lotus 1-2-3	\$335
Keytronic Keyboard	\$195 <sup>o</sup>
RAIL 8279 (80K with parity) EXPANDED ALL IBM	\$55 <sup>o</sup>
RUXEN PC212A MODEM	\$275 <sup>o</sup>
Terminix TM100-2	\$245 <sup>o</sup>
Terminix TM100-4 - with DOS-PC	\$385
TEAC 320K Half-height	\$285

### FOR ATARI

Printer Cable	\$25
Rana Elite 1000 - single/double density floppy	\$385 <sup>o</sup>
Serial Cable	\$35

### S-100 THINLINE COMPUTER SYSTEM

Sierra Data Master (2-80 4MB, 64K, 2 Serial, Parallel, 6070K)	\$350 <sup>o</sup>
2 Thinline 8" drives, 2MByte + 6 slot interface, 12" x 10" x 10"	\$350 <sup>o</sup>
Hi! -	
+ Add any standard video terminal and printer	
COMPUTER	\$165 <sup>o</sup>
Maintenance only	\$450

### SIERRA DATA SCIENCES

Z-80 4MHz Master (64K/2 serial/floppy controller/hard disk port)	
SBC-100	\$655
Z-80 4MHz Slave (2 serial/2 parallel/64K/EPROM programmer)	
SBC-100S	\$565
CP/M for Master with BIOS - CP/M/BIOS	\$150
Turbo-Dos for Master with Slaves - TURBO-DOS	\$545

### FOR COMMODORE 64

DADA-20 Video Adapter - 80 column display	\$168
Z-80 Video Pak - CP/M and 80 column	\$275
Serial to Parallel Printer Cable	\$75

### CORONA DATA SYSTEMS

Systems include half-height 320K drives, 128K RAM expandable to 512K on-board, 640 x 325 graphics, green monitor with 16 x 13 matrix characters, serial port, parallel port, DOS, Basic, and spreadsheet software.	
PC-1 drive - list \$2595	\$2095
PC-2 drive - list \$2395	\$2375
PC-HD 10MByte hard disk - list \$4495	\$3495
PP-1 Portable/1 drive - list \$2395	\$1950
PP-2 Portable/2 drives - list \$2795	\$2250

### WABASH DISKETTES

Single Side Single Density	5 boxes at \$17.50/box
Single Side Double Density	5 boxes at \$21.00/box
Double Side Double Density	5 boxes at \$23.00/box

### Chameleon "The Compatible Computer"


LOCAL SALES ONLY	\$1995
------------------	--------

### FOR OSBORNE

Corvus 6MB hard disk	\$1875
OSMOS 8 - double density mod	\$175
OSMOS 2 - 370K drives - compatible with software	\$585
OSMOS 3 - 750K drives	\$699
OSMOS 4 - Disk Format/Convert - read/write 20 formats	\$215
OSMOS 5 - 80 Column - select 50/80 display	\$235
OSMOS 6 - Drive Diagnostic	\$29

# VIDEO TERMINAL BOARD 82-018

This is a complete stand alone Video Terminal board. All that is needed besides this board is a parallel ASCII keyboard, standard NTSC monitor, and a power supply. It displays 80 columns by 25 lines of UPPER and lower case characters. Data is transferred by RS232 at rates of 110 baud to 9600 baud — switch selectable. The UART is controlled (parity etc.) by a 5 pos. dip switch.

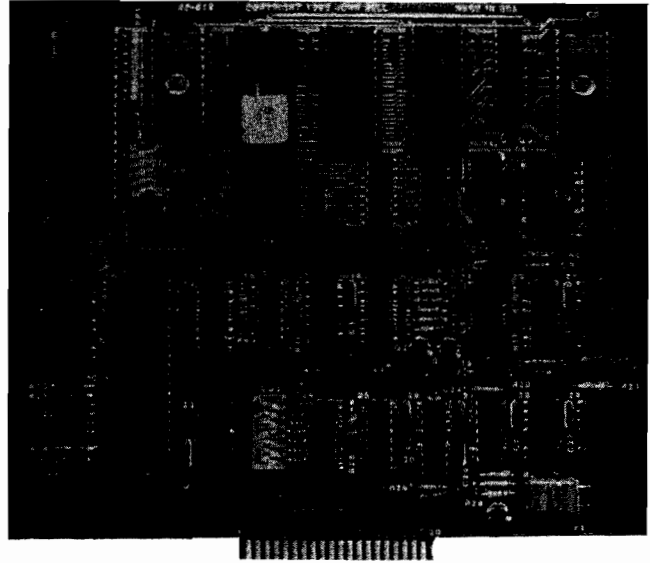


Complete source listing is included in the documentation. Both the character generator and the CRT program are in 2716 EPROMS to allow easy modification to your needs.

This board uses a 6502 Microprocessor and a 6545-1 CRT controller. The 6502 runs during the horz. and vert. blanking (45% of the time). The serial input port is interrupt driven. A 1500 character silo is used to store data until the 6502 can display it.

## Features

- 6502 Microprocessor
- 6545-1 CRT controller
- 2716 EPROM char. gen.
- 2716 EPROM program
- 4K RAM (6116)
- 2K EPROM 2716
- RS232 I/O for direct connection to computer or modem.
- 80 columns x 25 line display
- Size 6.2" x 7.2"
- Output for speaker (bell)
- Power +5 700Ma.  
+12 50Ma.  
-12 50Ma.

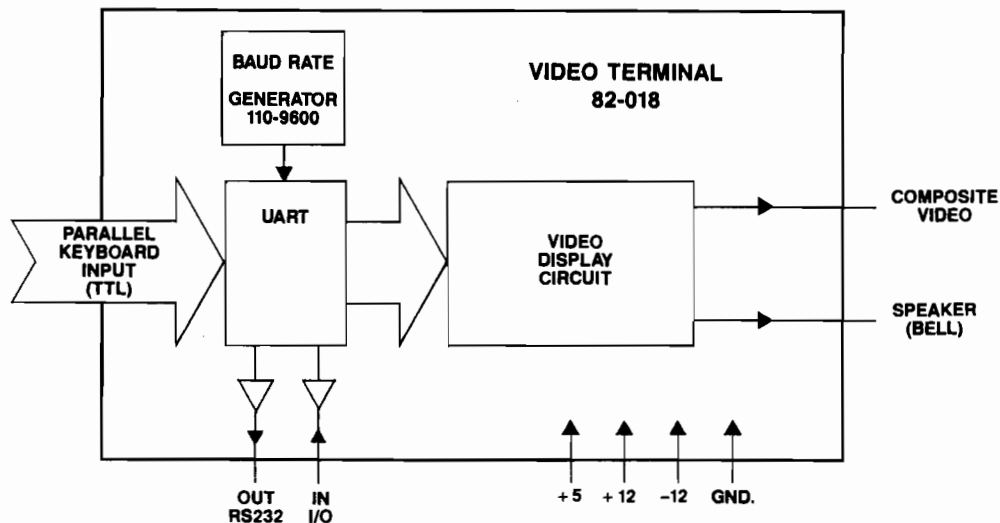

This board is available assembled and tested, or bare board with the two EPROMS and crystal.

Assembled and tested	#82-018A	\$199.95
Bare board with EPROMS and crystal	#82-018B	\$ 89.95

Both versions come with complete documentation.



## JOHN BELL ENGINEERING, INC.



#249

ALL PRODUCTS ARE AVAILABLE FROM JOHN BELL ENGINEERING, INC. • 1014 CENTER ST., SAN CARLOS, CA 94070  
ADD SALES TAX IN CALIFORNIA • ADD 5% SHIPPING & HANDLING 3% FOR ORDERS OVER \$100

SEND \$1.00 FOR CATALOG

(415) 592-8411

WILL CALL HOURS: 9am - 4pm

10% OUTSIDE U.S.A.  
ADD \$1.50 FOR C.O.D.




## Interface Clinic

by Ralph Tenny

An interface component that was mentioned only briefly in an earlier column is the *latch*. A latch was shown in a circuit designed to capture microprocessor bus data "on the fly" — directly from the bus. Latches have certain special features you need to know. First, there are two kinds of latches: *edge-triggered* and *transparent* latches. An edge-triggered latch will capture data only when a positive-going clock signal is applied to the part; transparent latches have a data input and an enable line. When the enable line is active, the latch output copies the logic state on the data line. When the enable line goes inactive, the latch locks up or captures the data present on the data line. The read/write memory in your computer works the same way; when the R/W\* line is low, data from the bus is gated through to the memory cells and the data is captured when R/W\* goes high.

All latches have certain critical timing parameters in common: *setup time*, *hold time*, and width of *clock pulse* or *enable strobe*. Setup time specifies how long the data must be present before the clock or enable strobe changes state and ranges from .2 microseconds for CMOS latches to .02 microseconds for TTL latches. Hold time specifies how long the data must remain valid after the strobe changes state. CMOS hold times are about .12 microseconds and TTL times are about .005 microseconds. Clock or enable pulse widths range from .2 microseconds for CMOS to .04 microseconds for TTL. Generally, setup and hold times must be taken into account only when parts are driven directly by the microprocessor bus; if the parts are driven by a PIA, timing limits are met easily since the PIA cannot be programmed to change quickly enough to cause timing problems. Figure 1 shows the typical timing waveforms for edge-triggered and transparent latches with the critical timing parameters identified.

Another interface component I have ignored so far is the *shift register*. Figure 2 shows the simplest form of shift register; it is a collection of latches connected in series so that the data output of the first stage drives the

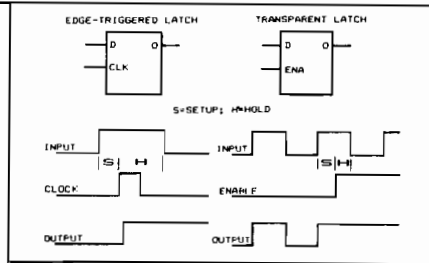

**Figure 1: A comparison of edge-triggered and transparent latches showing waveforms and critical timing parameters.**

data input of the second stage and so on to the end of the chain. All stages are clocked at the same time, so a logic one clocked into the first stage comes true in the second stage after the second clock pulse. With this kind of logic block it is possible to convert a serial data stream into a collection of parallel bits or data word.

The serial (printer) port on most computers works with a communications protocol known as asynchronous ASCII, which means that the individual groups of bits known as words can be sent and received on an irregular schedule. This is accomplished by the scheme illustrated in figure 3, which defines a single serial word as it might be sent to a printer. In the illustration, a data word has been divided into eleven segments or bits. All words start with the RS-232 Out line low (RS-232 logic one). The first bit is *always* logic zero, and is called the *start* bit. The start bit serves as a timing mark for the receiving circuit so it can know when the data word is coming. The receiving circuit begins counting time and tests


the input line  $1\frac{1}{2}$  bit times later, recording whether this bit is logic one or zero. Seven more tests or samples are made at one bit-time intervals, with the logic value of each being recorded. Bits 10 and 11 are called *stop* bits and are always logic ones. In continuous transmission, the last stop bit will be followed immediately by a start bit for the next word; during asynchronous transmission, the next word can be sent anytime.

What I have discussed is one common version of an asynchronous ASCII word; some versions will have only one stop bit, usually at the higher transmission rates. In order for an asynchronous scheme to work properly, both the sending and receiving circuits must be set for the same transmission rate, which normally is expressed as a *baud* rate. The definition of baud rate is that one baud is equal to one bit per second. Typical transmission rates are 300 baud, 600 baud, and 1200 baud; the Radio Shack standard is 600 baud to match Radio Shack printers.


In contrast to asynchronous transmission, some computer communication uses synchronous transmission, where special data-bit patterns signal start of data, end of data, etc. Inherent in synchronous transmission is a clock signal that signals the receiving circuit when to sample to read a bit's logic value.

Last month I used the printer port to send and receive single-bit information. The output level was held steady

**Figure 2: A simple shift register can be constructed by connecting a series of edge-triggered latches and using a common clock input.**

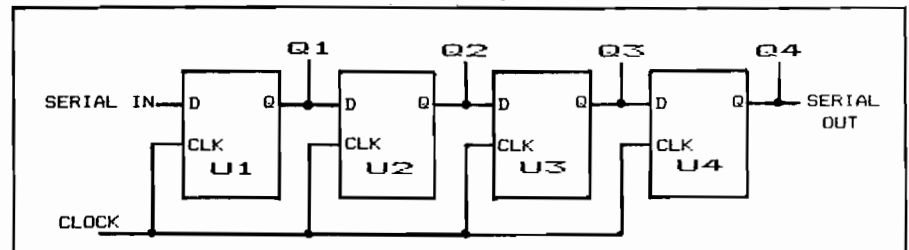

**Figure 3: Asynchronous serial transmission must use start and stop bits to allow the receiver to tell when each word starts and stops.**

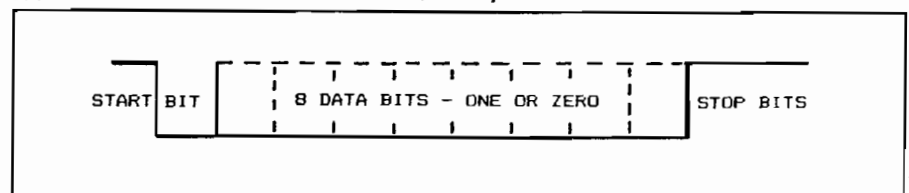

to indicate a logic one or zero, and the computer sampled the input line to determine if an external switch was open or closed. Since not much can be accomplished with single input and output bits, I have designed a scheme to handle more bits.

For this month's experiment I developed a scheme to output multiples of four bits, depending on how many sections I want to hook up. The first hurdle to face on the Color Computer is that there is only one output line; this limitation will probably apply on any computer that uses software to generate a serial data stream. Although it is possible to generate "home brew" circuitry that will receive standard asynchronous signals, I use somewhat simpler circuitry to implement a self-clocking scheme working in four-bit data blocks.

The circuit in figure 4 uses a delay scheme to encode both data and clock on the RS-232 Out signal, and a four-stage shift register captures the data. The circuit shows how to make a shift register from the CD4042 4-bit latch.

U1a and U1b work together to produce very fast signal transitions from the somewhat slower RS-232 Out signal as shown in figure 5. With the input low, U1a's output is high and U1b's output is low. As the input signal rises, R1 and R2 reduce the signal change at the input of U1a, but eventually U1a's input will reach the IC's signal threshold and U1a's output will begin to change, forcing U1b to change also. As the input continues to rise, U1b's output will go high until U2 is helping pull up on U1a's input rather than slowing the input rise. The graph in figure 5 shows the result — a slow level change at the input gives a fast change at the output. This type of cir-

cuit is called a Schmitt Trigger and is useful for interfacing slow signals to computers. U1c inverts the clock signal to provide the proper clock timing.

The network consisting of R3 and C1 acts to delay signal transitions reaching U1d and U1e, which are also connected as a Schmitt Trigger. If the RS-232 line goes high for only a short time, the RS/C1 delay into U1d and U1e prevents the data line from changing, but when the signal stays high long enough, the data line goes high. In either case, when the RS-232 line goes low again, C1 is discharged by R3 and a new cycle can begin. If a latch is connected to both the data and clock lines as shown in figure 4, it will capture either a logic one or a logic zero, depending on whether the RS-232 line stays high a long or short time. This is shown in figure 6, which shows the response of the circuitry in figure 4. The top line is an input from the RS-232 port, and the responses of the data and clock circuits are shown in the next two lines. Only the second input pulse is wide enough for U1d/U1e to change state, and this is reflected by the short period of logic one in the data signal. Meanwhile, the transitions of the clock signal marked with an arrow show when U2 will sample the data line. Assuming that Q1 of the shift register was high at the start, the logic zero of the input signal causes a transition to zero on the first clock pulse. The next data bit sent was a one (long positive pulse), and the second clock pulse captures a one. The third bit sent was a zero, which is captured by the third clock pulse. In order for this circuit to be useful, the RS-232 line must send four bits and stop until the next time data has to be sent. Also, you may

need driver circuitry such as the LED driver used last month, one driver for each bit stored in the shift register.

## Parts List for Experiment #2

U1 — CD4049 (Radio Shack #276-2449)  
 U2, U3 — CD4013 (Radio Shack #276-2442)  
 R1, R4 — 82K ohm, ¼-watt resistor  
 R2, R4 — 330K ohm, ¼-watt resistor  
 R3 — 22K ohm, ¼-watt resistor  
 C1 — 1 µF, 16-volt capacitor (Radio Shack #272-1419)  
 Power Supply — +5 volts to +10 volts (battery-suitable)


The circuitry in figure 4 can be exercised with the short subroutines shown below. These routines should be called by a program that breaks an output pattern into individual bits, counts the bits as they are output, and then stops transmission.

After a bit of reflection, I renege on one comment I made last month: I said that I would specify parts and materials to be used in projects only as the need arose. I now believe our purposes can be better served by listing materials that you can watch for, possibly saving money by finding items on sale. In particular, Radio Shack often has sales that allow good savings if you can anticipate future needs. When I choose parts for an experiment, you might already have the needed parts and can proceed immediately. The following listed items will be useful for various hardware experiments. You can collect these items gradually or get them as needed (Radio Shack part numbers shown).

## Discrete Components

Aluminum Electrolytic assortment: 272-604 or 272-605  
 ¼-watt resistor assortment: 271-602  
 Prototyping boards: 276-170, 276-158, 276-153  
 Transistor assortments: 276-1603, 276-1604  
 LED assortment: 276-1622  
 Silicon signal diodes: 276-1620 or 276-1122  
 Silicon rectifiers: 276-1101

**Figure 4: This circuit can be driven by a computer's printer port and will capture four bits of output data. Additional shift register sections can be added to handle more bits.**

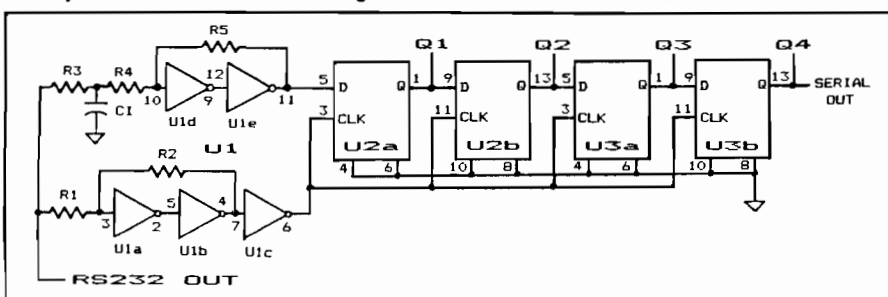

(continued)



# CSE means OSI

Software and Hardware  
Introducing 5 new disk programs

From DMP Systems:

Superdefender .....\$14.95  
Universe .....\$14.95  
Edit-all .....\$19.95  
De-debug .....\$12.95

From Dwo Quong Fok Lok Sow:

WP-6502 Word processor. Available in three versions.

5" disk .....\$200.00  
8" disk .....\$234.95  
Cassette .....\$39.95

Training Manual .....\$20.00  
CSE's Rom Source Code Listing 100 Pages! ..\$15.95

NEW! NEW! NEW!  
ANCHOR SIGNALMAN MODEMS .....\$89.50

Please write for more info on new disk programs or send \$2.00 for catalog. Please include \$2.00 shipping (\$3.00 for modems).




COMPUTER SCIENCE ENGINEERING

Box 50 • 291 Huntington Ave. Boston 02115  
617-423-9501

Circle No. 67

**Boulder Logical Testing, Inc.**  
is now offering a new EPROM Programmer  
**FOR \$195.00**

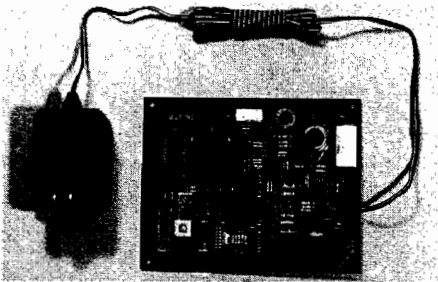

- Microprocessor based
- Programs 2716, 2732, 2732A and 2532 EPROMS
- Zero Insertion Force (ZIF) sockets are standard
- 25 or 22 volt programming voltage option
- Copy from EPROM to EPROM automatically
- RS 232 interface with selectable baud rates
- Thorough user documentation includes example software drivers for popular computer systems, including Apple\*, IBM PC\*, and CP/M\*
- Command set can be used from host computer or terminal
- Comes complete with power supply

To order, or for more information write:

**Boulder Logical Testing, Inc.**  
PO Box 902  
Boulder, CO 80306

Ordering information: send money order or check only, no CODs. Price includes shipping costs and documentation. Colorado residents include 3% sales tax.

\*Apple is trademark of Apple, Inc. IBM PC is trademark of IBM, CP/M is trademark of Digital Research.


Circle No. 68

## Interface Clinic (continued)


### Measurement Instruments (Optional, but useful)

Volt-ohmmeter: 22-204, or Digital  
VOM: 22-197  
Logic probe: 22-301

**Figure 5: Two resistors and two CMOS inverters make a circuit that generates fast logic transitions from a slow input signal.**

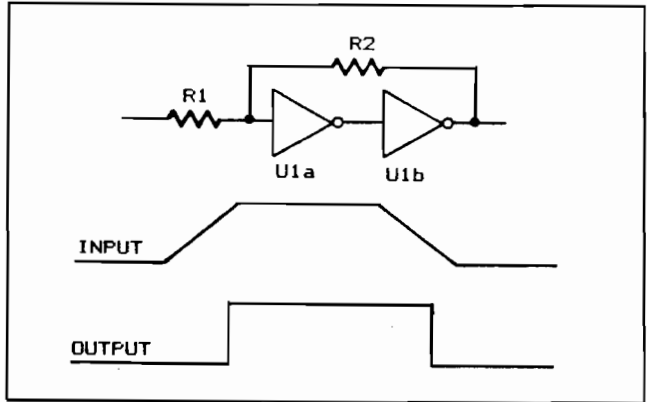

**Figure 6: Timing diagram for circuit in figure 4. The input signal encodes both data and clock by varying width of output pulses.**

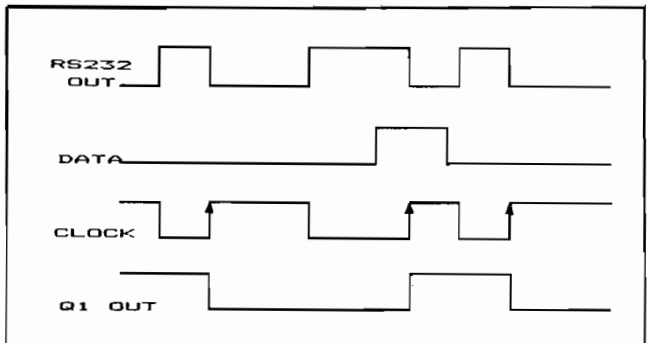

### Interface Clinic Listing


```

# THIS PROGRAM WILL DRIVE A SERIAL PORT ADAPTER.
# CALL THAT SUBROUTINE WHICH OUTPUTS EITHER A ONE
# OR ZERO AS NEEDED. THE CALLING ROUTINE MUST COUNT
# OUTPUT BITS AND HANDLE THE OPERATOR INTERFACE.
# THE USER MUST DEFINE THE ORIGIN; #2800 USED AS
# AN EXAMPLE.
# EQUATES
FF20 RS2320 EQU #FF20 RS-232 OUTPUT BIT = BIT 1
0002 BITHI EQU #02 SET BIT 1 HIGH
00FD BITLO EQU #FD SET BIT 1 LOW
0500 LONG EQU #0500 TIME CONSTANT FOR LOGIC ON OUTPUT
0280 SHORT EQU #280 TIME CONSTANT FOR LOGIC ZERO

# SUBROUTINES
2800 ORG #2800
2800 B6 FF20 ONE LDA RS2320 READ PORT BIT PATTERN
2803 B8 02 ORA #BITHI SET RS232 BIT HIGH
2805 B7 FF20 STA RS2320
2808 B8 0500 LDX #LONG TIME DELAY FOR LOGIC ONE
280B 30 IF COUNT1 LEAX -1,X COUNT DOWN
280D 26 FC BNE COUNT1
280F B6 FF20 LDA RS2320 READ BIT PATTERN AGAIN
2812 B4 FD ANDA #BITLO SET RS232 BIT LOW
2814 B7 FF20 STA RS2320
2817 B8 0280 LDX #SHORT REMAINING BIT CELL TIME
281A 30 IF CNTDN1 LEAX -1,X COUNT DOWN
281C 26 FC BNE CNTDN1
281E 39 RTS
281F B6 FF20 ZERO LDA RS2320 READ PORT BIT PATTERN
2822 B8 02 ORA #BITHI SET RS232 BIT HIGH
2824 B7 FF20 STA RS2320
2827 B8 0280 LDX #SHORT TIME CONSTANT FOR LOGIC ZERO
282A 30 IF COUNT2 LEAX -1,X COUNT DOWN
282C 26 FC BNE COUNT2
282E B6 FF20 LDA RS2320 SET RS232 BIT LOW
2831 B4 FD ANDA #BITLO
2833 B7 FF20 STA RS2320
2836 B8 0500 LDX #LONG FINISH BIT CELL TIME
2839 30 IF CNTDN2 LEAX -1,X COUNT DOWN
283B 26 FC BNE CNTDN2
283D 39 RTS
END
    
```

Please forward questions and suggestions for discussion topics to Mr. Tenny at P.O. Box 545, Richardson, TX 75080.

ACRO

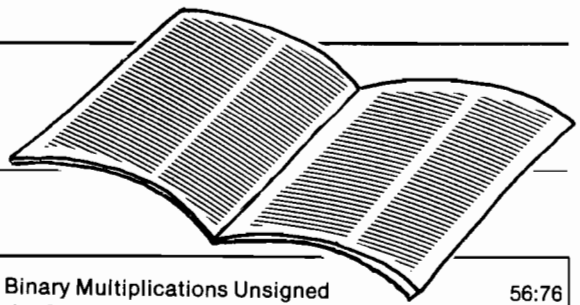

## Annual Index

The following two pages are a continuation of MICRO's Annual Index [see MICRO 60:105 for the first installment]. The list is comprised of articles that have appeared in MICRO over the past year and are placed under specific headings for easy reference. The first number indicates the issue and the second number the page of that issue.

### LANGUAGES

#### FORTH

BASIC, FORTH, and RPL <i>Timothy Stryker</i>	49:63
Microcomputer Interfacing: FORTH vs. BASIC <i>Mark Bernstein</i>	49:77
EDIT: An Atari FORTH Screen-Oriented Editor <i>Mike Dougherty</i>	57:47
FORTH for the 6809 <i>Ronald W. Anderson</i>	57:62
An Introduction to FORTH <i>Ronald W. Anderson</i>	57:58

#### LISP

The World According to LISP <i>Steven Cherry</i>	57:65
---	-------

#### LOGO

Three Faces of Apple LOGO <i>Edward H. Carlson (also see Education)</i>	53:41
--	-------

#### PASCAL

Low-Resolution Graphics for Apple Pascal <i>Richard C. Vile Jr.</i>	50:63
Introduction to Turtle Graphics in Apple Pascal <i>John R. Raines</i>	53:37
Discrete Event Simulation in Pascal <i>Anita and Bill Walker</i>	56:21
Apple Math Editor <i>Robert D. Walker</i>	56:78
Using Long Integers for BCD Numbers in Pascal <i>David C. Oshel</i>	56:86
Apple Pascal Hi-Res Screen Dump <i>Robert D. Walker</i>	57:54
Raising Numbers to a Power with Pascal <i>Robert D. Walker</i>	58:12

#### PILOT

Tiny PILOT for the PET <i>Jim Strasma and John O'Hare</i>	49:73
More on Tiny PILOT for the PET <i>Arthur Hunkins</i>	57:78

#### RPL

BASIC, FORTH, and RPL <i>Timothy Stryker</i>	49:63
---	-------

#### APL

SuperPET APL <i>Terry Peterson</i>	57:43
---------------------------------------	-------

#### MATH

Extending Newton-Raphson's Method to Evaluate Complex Roots <i>P.P. Ong</i>	56:71
--	-------

Signed Binary Multiplications Unsigned <i>Timothy Stryker</i>	56:76
--	-------


### PRINTERS

A Versatile Disc Label Printer <i>David Allen</i>	49:50
Building a Parallel Printer Interface <i>Rolf B. Johannesen</i>	53:23
The IBM Selectric an an OSI System Printer <i>Paul Krieger</i>	53:27
Hi-Res Plotting with the VIC <i>Fred Wallace</i>	58:19
Print Control for Apple Printers <i>John R. Vokey and H. Cem Kaner</i>	58:24
A Full Byte for Your Apple Printer <i>Mark J. Boyd</i>	58:42

### TECHNIQUES

Disk to Tape Backup Utility <i>Richard Merten</i>	49:9
BASIC, FORTH, and RPL <i>Timothy Stryker</i>	49:63
PRINT AT for OSI Systems <i>Matt Asay</i>	49:87
Interactive Random Generator <i>Harry White</i>	50:105
Left of Equal Sign MID& in Applesoft <i>Gustavo Criscuolo</i>	50:105
Structured Programming in 6502 Assembly Language <i>Kim G. Woodward</i>	51:43
Pattern-Matching with the 6502 on the Apple <i>Charles F. Taylor</i>	51:49
Random Number Generator in Machine Language for the Apple <i>Arthur Matheny</i>	51:57
A New Character Set for the VIC-20 <i>Mike Bassman</i>	51:63
On ERROR GOTO for OSI ROM BASIC <i>Earl Morris and Kerry Lourash</i>	51:85
Straightforward Garbage Collection for the Apple <i>Cornelis Bongers</i>	51:90
AMPER-POS for the Apple <i>Phillippe Francois</i>	52:51
6809 Macros for Structured Programming <i>Hal Clark</i>	52:57
Atari Character Graphics from BASIC, Part 1 <i>Paul S. Swanson</i>	53:87
Formatted Output with Atari BASIC <i>Frank Roberts</i>	53:75
Sensible Use of Apple Game Paddles <i>Harry L. Pruetz</i>	54:66
Apple Hi-Res Graphics and Memory Use <i>Dan Weston</i>	54:79
Atari Character Graphics from BASIC, Part 2 <i>Paul S. Swanson</i>	54:82
Getting Around the Apple Hi-Res Graphics Page <i>Eagle I. Berns</i>	54:93
Extra Colors for the Atari <i>Richard I. and Donna M. Marmon</i>	54:96
Atari Character Graphics from BASIC, Part 3 <i>Paul S. Swanson</i>	55:22
Applesoft GOTO/GOSUB Checking Routine <i>Peter J.G. Meyer</i>	55:26

(continued)

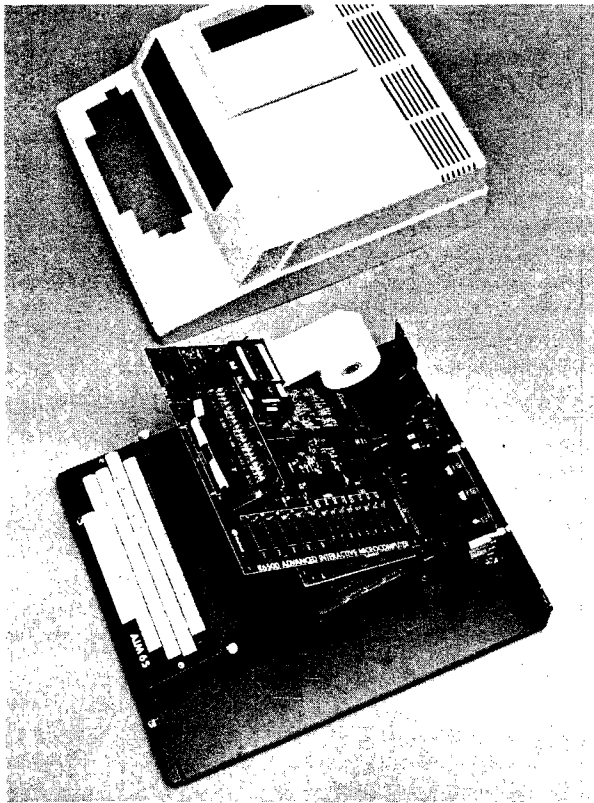

# AIM HIGH

Let Unique Data Systems help you raise your sights on AIM 65 applications with our versatile family of AIM support products.

- Go for high quality with our ACE-100 Enclosure. It accommodates the AIM 65 perfectly, without modification, and features easy access two board add-on space, plus a 3" x 5" x 17" and a 4" x 5" x 15.5" area for power supplies and other components. \$186.00.
- Get high capability with Unique Data System's add-on boards. The UDS-100 Series Memory-I/O boards add up to 16K bytes of RAM memory or up to 48K bytes ROM/PROM/EPROM to your Rockwell AIM 65. You also get 20 independently programmable parallel I/O lines with an additional user-dedicated 6522 VIA, two independent RS-232 channels with 16 switch-selectable baud rates (50 to 19.2K baud), and a large on-board prototyping area. Prices start at \$259.00.
- If you need to protect against RAM data loss, the UDS-100B offers an on-board battery and charger/switchover circuit. \$296.00.
- Heighten your AIM 65's communications range by adding the UDS-200 Modem board. It features full compatibility with Bell System 103 type modems and can be plugged directly into a home telephone jack via a permissive mode DAA. No need for a data jack or acoustic coupler. The UDS-200 also has software-selectable Autoanswer and Autodial capability with dial tone detector. The modem interfaces via the AIM 65 expansion bus, with the on-board UART and baud rate generator eliminating the need for an RS-232 channel. \$278.00.
- The UDS-300 Wire Wrap board accepts all .300/.600/.900 IC sockets from 8 to 64 pins. Its features include an intermeshed power distribution system and dual 44-pin card edge connectors for bus and I/O signal connections. \$45.00.
- Get high performance with the ACE-100-07 compact 4" x 5" x 1.7" switching power supply, delivering +5V @ 6A, +12V @ 1A, and +24V for the AIM printer. \$118.00.

Installation kits and other related accessories are also available to implement your AIM expansion plans. Custom hardware design, programming, and assembled systems are also available. High quality, high capability, high performance, with high reliability... all from Unique Data Systems. Call or write for additional information.

**Unique Data Systems Inc.**  
1600 Miraloma Avenue, Placentia, CA 92670

**(714) 630-1430**

Circle No. 69

## Annual Index (continued)

It's All Relative-CBM Disk Techniques, Part 1 <i>Jim Strasma</i>	55:37
Utilizing the 6502 Undefined Operation Code <i>Curt Nelson, Richard Villarreal and Rod Neisler</i>	55:93
VIC Hi-Res Graphics Explained <i>Nicholas J. Vrtis</i>	56:11
It's All Relative-Using CBM Disk Techniques, Part 2 <i>Jim Strasma</i>	56:52
Extending Newton-Raphson's Method to Evaluate Complex Roots <i>P.P.Ong</i>	56:71
It's All Relative-Using CBM Relative Records, Part 3 <i>Jim Strasma</i>	57:33
SuperPET APL <i>Terry Peterson</i>	57:43
Hi-Res Plotting with the VIC <i>Fred Wallace</i>	58:19
It's All Relative-Using Commodore's Relative Records, Part 4 <i>Jim Strasma</i>	58:85
Using Long Integers for BCD Numbers in Pascal <i>David C. Oshel</i>	58:12
Raising Numbers to a Power with Pascal <i>Robert D. Walker</i>	58:12
Disk ID for Printed OSI Directories <i>Robert A. Paul</i>	58:36
Apple Print-Using Routine <i>Celestino R. Monclova</i>	58:39
A Full Byte for Your Apple Printer <i>Mark J. Boyd</i>	58:42
Apple Disk Track Copy for Non-Matching Volume Numbers <i>Roland E. Guilbault</i>	58:82
Unleash the AIM A Block <i>Tom Lillevig</i>	59:61

### UTILITIES

Breakpoint Utility for OSI C1P <i>John S. Seybold</i>	49:84
Symbol Table Lister for the OSI <i>Rolf Johannssen</i>	49:93
Auto Entry for the C1P <i>Allen J. Zadlraka</i>	50:93
SURCHANGE for the OSI <i>Kerry Lourash</i>	51:76
POWER-Aid for the PET <i>F. Arthur Cochrane</i>	51:71
OSI Extended I/O Processor <i>Michael J. Keryan</i>	51:99
Delete on the OSI <i>Earl Morris and Yasuo Morishita</i>	51:106
COMPRESS-An Applesoft Optimizer <i>Barton M. Bauers</i>	52:89
Screen Editor for the OSI 65D Assembler <i>Les Cain</i>	53:19
Apple ILISZI for Integer BASIC Programs <i>Leonard Anderson</i>	55:13
BASIC Macro Function for Cursor Control <i>Kerry Lourash</i>	55:19
Programmable Character Generator for OSI <i>Colin Macauley</i>	55:88
PROM BASIC for the C1P <i>David A. Jones</i>	57:22
Indirect Files Under OS-65D <i>Richard L. Tretheway</i>	57:28
BASIC Renumber for OSI <i>Paul Krieger</i>	57:40
Improved IEEE-488 Control for PET/CBM <i>David W. Priddle</i>	57:77

**MICRO**

# COMMANDER

THE MONTHLY JOURNAL FOR  
COMMODORE COMPUTER USERS

SUPER PET



VIC-20

PET/CBM



## GET YOUR MONEY'S WORTH

You've probably made a sizeable investment in your computer equipment. **COMMANDER** can help you make the most of it.

Each issue brings you the *no-nonsense* advice you need to stay on the leading edge of this constantly changing field. **COMMANDER** will be your reference to the world of computers . . . with the best, most comprehensive coverage you can get!!



Subscribe now and take advantage of our limited offer of \$4 off the one year subscription.

1 YR. U.S. \$22  2 YR. U.S. \$40  3 YR. U.S. \$58  
(Prices do not include \$4 Discount) Prices in U.S. Funds  
Washington residents please add 7.8% sales tax

—Subscription Orders Only—  
Toll Free Number: 1-800-426-1830  
(except WA, HI, AK)


**COMMANDER**

P.O. BOX 98827  
TACOMA, WASHINGTON 98498  
(206) 565-6816

Circle No. 70

### 32K CMOS STATIC RAM BOARD for SYM/ AIM

Models MB-132/ 32K, \$299  
/16K \$241, /8K \$197



#### Features:

- 200ns Low Power CMOS, STATIC RAM
- Extends your expansion connector
- Plug compatible with 2716 EPROMS
- First 8K are jumper selectable
- Entire board may be bank-switched
- G-10 Glass epoxy, Full solder mask, Gold fingers
- Full 1-year limited warranty

### I/O EXPANSION BOARD for the SYM/ AIM

and other microcomputers that use 6522 VIAs for I/O and do not provide full address decoding on board. This board has physical space for four additional 6522 VIAs, and provides additional decoding for a total of 16 devices. Connectors for all I/O lines, and further expansion are included. All 6522 functions are available, with no interference with previous functions of the original VIA. Two versions of this board are available. The I/OX-122 mounts above, and directly plugs into, an on-board 6522 socket, and relocates the original VIA to the expansion board. Where there are space limitations, the I/OX-222 uses a dip header and an 8' cable for remote installation.

I/OX-122 \$60  
I/OX-222 \$72



**REAL-TIME CLOCK/CALENDAR \$60** Write for Info.  
P.O. Box 1019 • Whittier, CA 90609 • (213) 941-1383

ALTERNATIVE  
ENERGY  
PRODUCTS

Circle No. 71

# Speed,

Speed with the **PASCAL SPEEDUP SYSTEM**, our best seller. Features complete ease of use with all APPLE PASCAL; UCSD PASCAL 1.1; APPLE RUNTIME ENVIRONMENT; & FORTRAN applications. From 40 to 150% speed boost on most programs (some even faster). All with no programming and with only one extra watt of power from your power supply.

# Power,

Power with the cost efficient 6809 coprocessor; the 8 bit chip with a 16 bit "personality". Enough power to drive multi-tasking OS-9 / BASIC 09, the "Unix-like" operating system with a Pascal-like BASIC for the Apple. It's all in a days work for **THE MILL**.

# Efficiency.

Efficiency with the **ASSEMBLER DEVELOPMENT SYSTEM**; Heavyweights write state of the art programs on the 6809 for DOS 3.3 or even stand alone. Utilities include M.A.P. (McMill Adaptor for Pascal).


*"The Stellation Two people have earned my highest respect for assembling an impressive collection of software for their board."*

- Michael Coffey/  
Creative Computing Magazine

*"I feel my software output has been greater in the six months I have used OS-9 than it was in the 3½ years previous combined. It has a rakish logical simplicity that nearly defies description...I bill OS-9 as a programmers dream operating system."*

- Brian Capouch/  
MICRO Magazine

Call today or write for more information on this inexpensive Apple II, IIe enhancement.

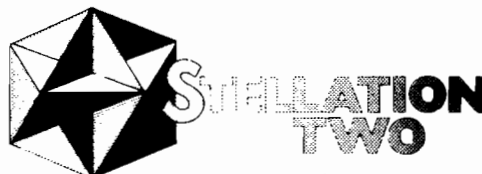

The Lobero Building P.O. Box 2342  
Santa Barbara, Ca. 93120  
(805) 966-1140 Telex 658439

Circle No. 72

another  
**FLEXIDUCT**®

OFFICE  
SAFETY PRODUCT



When you  
least expect it,  
**ZAP!!!**



In a few millionths of a second, common electrical surges and spikes can enter your data processing equipment and cause memory loss, false logic and misregistration. Surges very often do permanent damage to microcircuitry.

**FLEXIDUCT** Surge Suppressors catch surges and spikes before they have a chance to enter your equipment. In billionths of a second (Nanoseconds), **FLEXIDUCT** Surge Suppressors dissipate surges and spikes from any side of the line (most protect only one side).

Model FS-P plugs into the wall outlet to protect that outlet **and all other outlets on that circuit**. For safety, it is fused to protect from overloads.

No computer should be without the protection of a **FLEXIDUCT** Surge Suppressor...**especially yours!** Write or call for further information. Available from office products retailers.

**FLEXIDUCT**® Surge Suppressors

a product of Winders & Geist, Inc. P.O. Box 83088 Lincoln, NE 68501 402/474-3400

# D&N MICRO PRODUCTS, INC.

3702 N. Wells St.  
Fort Wayne, Ind. 46808  
(219) 484-6414

TERMS \$3.00 shipping. Foreign orders add 15%. Indiana residents add 5% sales tax.

## COMPUTER

### MICRO-80 COMPUTER

Z-80A CPU with 4Mhz clock and CP/M 2.2 operating system. 64K low power static memory. Centronics parallel printer port. 3 serial ports. 4" cooling fan. Two 8" single or double sided floppy disk drives. IBM single density 3740 format for 243K or storage, double density format for 604K of storage. Double sided drives allow 1.2 meg on each drive. Satin finish extruded aluminum with vinyl woodgrain decorative finish. 8 slot backplane, 48 pin buss compatible with OSI boards.

**MODEL 80-1200** \$2995  
2 8" Single sided drives  
**MODEL 80-2400** \$3495  
2 8" Double sided drives

### MICRO-65 COMPUTER

6502 CPU with 2Mhz clock and DOS-65 operating system. 48K of low power static memory. 2 serial ports and 1 Centronics parallel port. 2 8" single or double sided drives. Satin finish extruded aluminum with vinyl woodgrain finish. 8 slot backplane, 48 pin buss compatible with OSI. Will run OSI 65D and 65U software. Includes Basic E/65 a compiled BASIC for 6502 CPU.

**MODEL 65-1** \$2995  
2 8" Single sided drives  
**MODEL 65-2** \$3495  
2 8" Double sided drives

### BP-580 8 Slot Backplane . . . . \$ 47

#### MEM-CM9 MEMORY/ FLOPPY CONTROLLER

24K memory/floppy controller card uses 2114 memory chips, 1 8K and 1 16K partition. Supports OSI type disk interface

**24MEM-CM9** . . . . . \$325  
**16MEM-CM9** . . . . . \$260  
**8MEM-CM9** . . . . . \$180  
**BARE MEM-CM9** . . . . . \$ 50  
Controller on assembled unit  
add. . . . . \$ 90

**BIO-1600 Bare IO card** . . . . . \$ 50  
Supports 8K of memory, 2 16 bit parallel ports, 5 serial ports, with manual and Molex connectors.

## PRINTERS

### Okidata

**ML82A**, 120 cps, 10" . . . . \$409  
**ML83A**, 120 cps, 15" . . . . \$895  
**ML84** Parallel, 200 caps, 15" . \$1150

### C. Ioth

**8510AP** Prowriter, parallel . . . \$419  
120 cps, correspondence quality  
**8510APD** Prowriter, serial . . . \$585  
**F10-40PU** Starwriter, parallel \$1319  
Letter quality daisy wheel  
**F10-40RU** Starwriter, serial . . \$1319  
**F10-55PU** Printmaster . . . . \$1610  
parallel, Letter quality daisy  
wheel  
**F10-55RU** Printmaster, serial \$1610

### DISK DRIVES AND CABLES

**8" Shugart SA801** . . . . . \$385  
single sided  
**8" Shugart SA851** . . . . . \$585  
double sided  
**FLC-66** ft cable from D&N . . . \$69  
or OSI disk controller to 8" drive  
**5 1/4" MPI B51** disk drive with . . \$450  
cable, power supply and  
cabinet. Specify computer type.  
**FLC-5 1/4** cable for connection . \$75  
to 5 1/4 drive and D&N or OSI  
controller, with data separator  
and disk switch. Specify  
computer type

## HARDWARE

### OSI COMPATIBLE

**IO-CA10X** Serial Printer Port . . \$125  
Specify Device #3 or #8  
**IO-CA9** Parallel Printer Port . . \$150

### CMOS-MEM

64K CMOS static memory board, uses 6116 chips, 3 16K, 1 8K and 2 4K blocks, Partitionable for multi-user, OSI type disk controller, 2 IO mapped serial ports for use with D&N-80 CPU. Ideal way to upgrade from cassette to disk.

**64K CMOS-MEM** . . . . . \$500  
**48K CMOS-MEM** . . . . . \$405  
**24K CMOS-MEM** . . . . . \$260  
**16K CMOS-MEM** . . . . . \$210  
**BARE CMOS-MEM** . . . . . \$ 50  
Controller . . . . . add. \$ 90  
2 IO mapped serial ports . . . . \$125  
on assembled memory board  
**Z80-IO** 2 IO mapped serial . . . \$160  
ports for use with D&N-80 CPU  
card  
**FL470** Disk Controller . . . . . \$155  
5 1/4 or 8" drive



## STANDARD CP/M FOR OSI

### D&N-80 CPU CARD

The D&N-80 CPU allows the owner of an OSI static memory computer to convert to Industrial Standard IBM 3740 single density disk format and CP/M operating system. Double density disk operation is also supported for 608K of storage on an 8" diskette. When used with a 5 1/4" disk system 200K of storage is provided. Optional parallel printer and real time clock. Also available for polled keyboard and video systems. Compatible with C2, C3, C4 and 200 series OSI computers.

### INCLUDES CP/M 2.2

**D&N-80-1** Serial 8" disk . . . \$595  
**D&N-80-2** Video 5 1/4" disk . \$595  
**D&N-80-3** Video 8" disk . . . \$595  
**Option 001** . . . . . \$ 60  
Parallel printer and  
real time clock.

### HARD DISK DRIVER \$140

Allows D&N-80 CPU board to control OSI 40 or 80 meg hard disk unit. Will not destroy OSI files. Will also allow for a true 56K CP/M system. Specify 40 or 80 meg drive.

### BUS TRANSFER \$135

Allows for D&N-80 and OSI CPU to be in the computer at the same time. Toggle switch provides for alternate CPU operation.

### DISK TRANSFER \$100

Utility program to transfer OSI CP/M format disk to IBM 3740 single density format. Will also transfer IBM to OSI format.

### SYSTEM HARDWARE

#### REQUIREMENTS

D&N-80 CPU, D&N FL470 or OSI 470 controller, 48K memory at 0000-BFFF, 4K memory at D000-DFFF, two disk drive cables.

### FORMAT TRANSFER \$15

You supply software on 8" diskette D&N will transfer OSI CP/M format to IBM 3740 CP/M format. Can also transfer IBM 3740 CP/M format to OSI CP/M format. Original diskette returned.

## Software Catalog

### Commodore

Five new programs are available for CBM/PET and Commodore 64 computers. **Script Ease (\$39.50)** is a 40-column word processor designed for all levels of word processing needs. Text can be output to the printer without any format commands. These commands can be added in subsequent lessons. Requires disk drive, printer, and 32K in the CBM/PET. A \$5.00 demo is available (refundable).

**Datalog (\$39.50)** lets you define up to 12 of your own fields and creates up to 1000 records on a 4040 disk, each record being over 200 characters long. Interfaces to popular word processors for printing form letters or labels. Multiple sort and search capabilities. Same requirements as Script Ease. A \$5.00 demo is available (refundable).

**Date Due (\$39.50)** manages overdue items in libraries. It prints reports by name, date, call number, title, or room number.

Operates in 16K, 32K, or the "64". Requires disk drive and a printer is preferred. **Multiple Choice (\$29.50)** creates up to 150 question and answer sets per disk file. Any number of questions can be selected from the bank and randomized if desired. The answer choices are always in random order. A test can be taken on screen or printed on paper. An answer key is printed down the left side of the paper. Supplied on disk only but can be saved and used on tape. Provides high security for teacher made tests. Runs in 16K, 32K, and the "64".

**Ledger (\$29.50)** is a financial package for personal finance or school revolving accounts. It prints reports sorted by journal, ledger, or check register and handles up to 300 transactions in any number of accounts. It runs in 16K, 32K, or on the C64.

For more information contact Midwest Software, Box 214, Farmington, MI 48024; 313-477-0897.

### Atari 800 Utility Cartridge

**Monkey Wrench II** is a ROM cartridge that plugs into the right-hand slot of your Atari 800. It provides 18 new BASIC commands and 16 machine-language commands. The new BASIC commands include: auto line numbering, renumber lines, delete range of lines, display all BASIC variables and values, scrolling up or down, find string, exchange string, copy lines, move lines, display disk directory, cursor exchange (no shift key needed), upper case lock, hex conversion, decimal conversion, and format program list (separates and prints to the screen or printer each command appearing on a BASIC multiple command line).

Price is \$59.95. For more information contact Eastern House Software, 3239 Linda Drive, Winston-Salem, NC 27106; (919) 924-2889.

### Inventory Management for the Commodore 8032

**INFOTORY**, an inventory management system now available for the Commodore 8032 Professional Computer, offers an item capacity of 4,000 inventory items with 38 fields of information for each item, including three pricing levels. **INFOTORY** provides users with information reporting capabilities through its data management sub-system, **ANYREPORT**. **ANYREPORT** allows users to design reports based on information associated with their inventory and the option to save those reports for future use.

Suggested retail price is \$425.00. For more information contact S.S.R. Corp., 1600 Lyell Ave., Rochester, NY 14606; (716) 254-3200.

## ATTENTION PROGRAMMERS!

At last! Microscreens, a screen generator package lets you produce clear, uncluttered, professional quality monitor screen formats . . . for only \$119.00. Just a few lines of code in your BASIC is all it takes. Develop selection menus, data-entry, inquiry display and more . . . quickly and easily . . . because Microscreens:

- provides configuration routines for monitor control characters. Permits use on any monitor.
- provides a "DRAW" program. Enables programmer to create any screen format on a blank screen.
- provides protected, unprotected and variable use fields.
- provides editing of input to data-entry screens and full data validity checking.
- provides highlighting and reverse video features usage (when available on your monitor).
- lets you position the cursor at the beginning of any data input field.
- provides six different escape codes for help, emergency stop or any other abnormal complication of input.
- can be INCLUDE'd in CP/M® BASIC compiled programs or MERGE'd with the MICROSOFT® BASIC Interpreter for Apple II with Softcard®.
- 3 K memory for screen handling routines; frequently less than your own code for monitor input/output.
- is a maximum flexibility screen generator. Reduces your programming time as much as 40%.

ORDER NOW. \$119.00

Please send my Microscreens program so I can begin to get quick and easy professional quality monitor screens. Only \$119.00.

Name \_\_\_\_\_

Address \_\_\_\_\_

City, State, Zip \_\_\_\_\_

Phone \_\_\_\_\_

MC/VISA \_\_\_\_\_ Exp. date \_\_\_\_\_

Circle one  
 CBASIC Compiler    MBASIC Compiler  
 CB80 Compiler      MBASIC Interpreter  
 Basic-80 Compiler    Apple CP/M

©Apple II™ of Apple Computer, Inc., Microsoft, MBASIC™ of Microsoft, Inc., CP/M™ of Digital Research, Inc.



PMI, Incorporated  
 P.O. Box 87  
 Buckfield, ME. 04220  
 (207) 336-2500

DEALER INQUIRIES INVITED

## Programmer Utilities for Atari

**AiDE** [Absolute Disk Editor] for the Atari is a menu-driven system to simplify the disk management task. **Telecom** is a communications package that allows the Atari 400/800 to communicate with any and all other computers.

AiDE is \$29.95; Telecom is \$69.95. Both systems run on the Atari 400/800 home computer. Available from Roklan Corporation, 3335 N. Arlington Heights Road, Arlington Heights, IL 60004.

## In Search of the Most Amazing Thing

In Search of the Most Amazing Thing, a combination adventure, strategy and arcade game, is designed to create an environment in which children are experiment and discover. The game places the child into a fantasy adventure where he/she must employ strategy and learning skills to discover the location and identity of The Most Amazing Thing.

Children will learn decision making and organizing, note-taking and writing, map reading, trading and bargaining, music writing and drawing, and exploration.

In Search of the Most Amazing Thing is compatible with Apple, Atari, IBM, and Commodore-64 computers. Price is \$39.95.

(Continued on page 111)



# HELLO CENTRAL!

*The single most important telecommunications program available today . . .*

"The most satisfying feature of HELLO CENTRAL! is its user-friendliness. . . offers some features that have been longed for in a terminal program. . . HELLO CENTRAL! is a great terminal program. . . consider this one."

—SOFTALK (December, 1982)

"The manual is relatively easy to read. . . Most directions, choices, and commands are either easy to remember or are displayed on the screen. . . In my opinion, the best feature. . . is the text editor. It allows you to write, insert, delete, and copy blocks of text in a very efficient manner. . . can receive and store text files written in Integer. . . Applesoft® BASIC and in Binary Code. . ."

—DESKTOP COMPUTING (December, 1982)

Here are a few of the features standard with HELLO CENTRAL!

- 18,000 character buffer to store an unlimited number of lines, regardless of length
- No need for 80-column hardware, because internal wordwrap eliminates split words
- Auto dial/answer and take-a-message
- Accepts any ASCII file
- Upper and lower case input and output
- Multiple user-defined directories
- Powerful text editor lets you modify incoming and outgoing information
- Not copy-protected, allowing for easy back-up
- Completely menu-driven
- Program updates (when available) via modem

Ask for No. 26081 . . . . . **only \$99.00**

Only HELLO CENTRAL! has all of these features for \$99.00! Call 800-428-3696 or 317-298-5566 and ask for Operator 402.

Available for Apple II® series computers, including the new IIe®.  
Apple II, II-PLUS, IIe, and Applesoft are registered trademarks, of Apple Computer, Inc.



## SAMS BOOKS & SOFTWARE

HOWARD W. SAMS & CO., INC.  
4300 West 62nd Street P.O. Box 7092  
Indianapolis, IN 46206



computer mail order west

# computer mail order

**PRINTERS**  
SMITH CORONA

Call on \$50.00 Factory Rebate!

TP-1 ..... \$499.00  
Tractor Feed ..... \$129.00  
Ultrasonic I Typewriter ..... \$439.00

**C.I.TOH(TEC)**

GX-100 ..... \$209.00  
Prowriter 8510P ..... \$379.00  
Prowriter 8510S ..... \$579.00  
Prowriter 1550P ..... \$699.00  
Prowriter 1550S ..... \$749.00  
Starwriter F10-40 ..... \$1259.00  
Printmaster F10-55 ..... \$1649.00

**OKIDATA**

82A ..... CALL  
83A ..... CALL  
84 (Parallel) ..... CALL  
84 (Serial) ..... CALL  
92 ..... CALL  
93 ..... CALL

**IOB**

MicroPrism ..... \$649.00  
132 (Fully Configured) ..... \$1599.00  
80 (Fully Configured) ..... \$1399.00

Call for other configurations.

**STAR**

Gemini 10 ..... \$349.00  
Gemini 15 ..... \$489.00  
Serial Board ..... \$75.00


**DAISYWRITER**

2000 (Letter Quality) ..... \$1049.00  
Tractor Feed ..... \$109.00

**DIABLO**

620 ..... \$999.00  
630 ..... \$1789.00

**TeleVideo**



**TERMINALS**

910 ..... \$559.00  
912C ..... \$689.00  
920C ..... \$739.00  
925C ..... \$719.00  
950 ..... \$929.00

**COMPUTERS**

800A ..... \$1259.00  
802 ..... \$2649.00  
802H ..... \$4695.00  
806/20 ..... \$4949.00  
816/40 ..... \$6999.00  
803 ..... \$1949.00  
1602G ..... \$3399.00  
1603 ..... CALL

**NEC**

**COMPUTERS**

6000 ..... CALL  
8001A ..... \$719.00  
8031 ..... \$719.00  
8012 ..... \$549.00


**PRINTERS**

8023 ..... \$419.00  
7710/7730 ..... \$2249.00  
3510/3530 ..... \$1549.00

**MONITORS**

JB-1260 ..... \$119.00  
JB-1201 ..... \$149.00  
JC-1212 ..... \$299.00  
JC-12-202 ..... \$299.00  
JC-1203 ..... \$589.00

**EAGLE**



Call on Eagle 8 Bit & 16 Bit Computers & Software

**MOODEMS**  
HAYES

Smart ..... \$219.00  
Smart 1200 (1200 Baud) ..... \$549.00  
Chronograph ..... \$199.00  
Micromodem 100 ..... \$309.00  
Micromodem II ..... \$279.00  
Micromodem II (with term) ..... \$299.00  
Smart Com II ..... \$99.00

**NOVATION**

J-Cat ..... \$119.00  
Cat ..... \$144.00  
D-Cat ..... \$159.00  
103 Smart Cat ..... \$169.00  
Apple Cat II ..... \$279.00  
103/212 Smart Cat ..... \$439.00  
212 Apple Cat II ..... \$609.00  
Apple Cat II 212 Upgrade ..... \$309.00

**ANCHOR**

Mark I (RS-232) ..... \$79.00  
Mark II (Atari) ..... \$79.00  
Mark III (T.I.-99) ..... \$109.00  
Mark IV (CBM-PET) ..... \$125.00  
Mark V (Osborne) ..... \$95.00  
Mark VI (IBM-PC) ..... \$179.00  
Mark VII (Auto Ans./Auto Dial) ..... \$119.00  
TRS-80 Color Computer ..... \$99.00  
9 Volt Power Supply ..... \$9.00  
Mark VIII ..... CALL

**MONITORS**  
AMOEK

300G ..... \$159.00  
300A ..... \$189.00  
310G ..... \$179.00  
310A ..... \$169.00  
Color I ..... \$299.00  
Color II ..... \$599.00  
Color I/A ..... \$799.00  
Color III ..... \$349.00

**BMC**

12AU 12" Green ..... \$79.99  
1401 13" Color (Mid-Res) ..... \$369.00  
9191 U 13" Composita ..... \$329.00

**TAXAN**

RGB 1 (Hi-Res) ..... \$299.00  
RGB III ..... \$499.00  
12 N Green ..... \$119.00  
12 A Amber ..... \$125.00

**ZENITH**

ZVM 121 ..... \$95.00  
ZT-1 Terminal ..... \$369.00

**U.B.I.**

PI 1, 9" Green ..... \$99.00  
PI 2, 12" Green ..... \$119.00  
PI 3, 12" Amber ..... \$159.00  
PI 4, 9" Amber ..... \$139.00  
1400C 14" Color ..... \$299.00

**PANASONIC**

JR200U 32K Pers. Computer ..... \$309.00

**MONITORS**

TR-120 12" Hi-Res Green ..... \$159.00  
DT-160 10" Dual Mode Color ..... \$299.00  
CT-D1000 10" RGB ..... \$349.00  
DT-D1300 13" RGB/Compos. ..... \$429.00

**IBM**

**NEC**

3860 PRINTER... \$1549

**PERCOM/TANDOOM DRIVES**

5 1/4" 180K Disk Drive ..... \$249.00  
5 1/4" 320K Disk Drive ..... \$299.00

**AMOEK**

310A Amber Monitor ..... \$169.00  
310G Green Monitor ..... \$179.00  
Amdiak (3 1/4" Drive) ..... \$679.00  
XY Plotter ..... \$649.00  
Color II ..... \$599.00

**ABT**

Combo Card 64K ..... \$429.00

**QUBIE**

PC Keyboard ..... \$219.00

**SOFTWARE**

MicroPro WordStar/MailMerge ..... \$349.00  
I.U.S. Easywriter II ..... \$249.00  
I.U.S. EasySpeller ..... \$129.00  
Peach Package (GLAP/AR) ..... \$419.00

**PROFESSIONAL SOFTWARE**

IBM-PC Word Processing ..... \$319.00

**CONTINENTAL SOFTWARE**

1st Class Mail/Form Letter ..... \$89.00  
The Home Accountant Plus ..... \$109.00

**SYNAPSE**

File Manager ..... \$119.00

**IMMS**

Privacode Phone ..... \$239.00

**READY FORMS**

1" or 2" Address Labels (Tract. Feed) ..... \$9.95  
15" Report Paper (Tract. Feed) ..... \$24.95  
8 1/2" Blink Wht Paper (Tract. Feed) ..... \$19.95  
8 1/2" Blink Env (Tract. Feed) ..... \$14.95

**SANYO**

MB1000 Computer ..... \$1599.00

**INCLUDES FREE SOFTWARE:**

MicroPro, WordStar, CalcStar, Mail Merge & Report Star.

MB 180 Add on Drive ..... \$539.00  
5500 Letter Quality Printer ..... \$699.00

**TIMEX SINCLAIR 1000**



**\$39.95**

16K Memory Module ..... \$44.95  
Vu-Calc ..... \$17.95  
Check Book Manager ..... \$13.95  
The Organizer ..... \$14.95  
The Budgeter ..... \$13.95  
Stock Option ..... \$14.95  
Loan & Mortgage Amortizer ..... \$12.95  
Mindware Printer ..... \$109.00

**ORBYTE SOFTWARE**

Graphics ..... \$12.99  
Home Budgeter ..... \$12.99  
Home Inventory ..... \$12.99  
Income Tax ..... \$14.99  
Mega Mind ..... \$15.99  
Salvo ..... \$12.99  
The Quiz ..... \$12.99  
Words ..... \$12.99

**commodore**

CALL ON CBM 64 \$100.00 REBATE



**CBM 64 \$399**

**VIC 20 \$99.**

4064 ..... \$569.00  
12840 ..... \$649.00  
12880 ..... \$749.00  
8032 ..... \$1039.00  
4032 ..... \$739.00  
8098 Upgrade Kit ..... \$389.00  
9000 ..... \$1499.00  
2031 ..... \$449.00  
4040 ..... \$949.00  
8050 ..... \$1279.00  
8250 ..... \$1639.00  
9080 (5 Meg. HD) ..... \$1999.00  
9090 (7.5 Meg. HD) ..... \$2199.00  
4022 ..... \$389.00  
8023 ..... \$589.00  
6400 Letter Quality Printer ..... CALL  
Spell Master ..... \$99.00  
Z Ram add CP/M\* & 64K ..... \$549.00  
Silicon Office ..... \$749.00  
Calc Result ..... \$159.00  
The Manager ..... \$209.00  
The Soft Rom ..... \$129.00  
Jinxam ..... CALL  
ADA 1600 CBM to Parl. Int. ..... \$89.00  
ADA 1450 CBM to Serial Int. ..... \$99.00

**EASY BUSINESS SERIES 64**

Easy File ..... \$79.00  
Easy Finance ..... \$39.00  
Easy Mail ..... \$39.00  
Easy Script ..... \$79.00  
Word Machine/Name Machine ..... \$23.00

**PROGRAMMER SERIES 64**

Assembler ..... \$39.00  
Logo ..... \$79.00  
Pilot ..... \$79.00  
Pet Emulator ..... \$25.00  
Screen Editor ..... \$25.00  
Video/Music Support ..... \$39.00

**ART AND MUSIC SERIES 64**

Music Machine ..... \$25.00  
Music Composer ..... \$25.00  
Meta Music I ..... \$79.00

**COMMERCIAL DATA**

Motor Mouse/20 ..... \$23.00  
Contipode/20 ..... \$23.00  
Froggee/20 ..... \$23.00  
Froggee/64 ..... \$23.00

**CREATIVE SOFTWARE**

Astro Blitz ..... \$32.00  
Black Hole ..... \$32.00  
Traahman ..... \$32.00  
Home Finance ..... \$27.00  
Home Inventory ..... \$13.00

**UMI**

Amok ..... \$30.00  
Meteor Run ..... \$40.00  
Allen Blitz ..... \$30.00  
Viterm A ..... \$16.00  
The Alien ..... \$16.00

**PROFESSIONAL SOFTWARE**

Power ..... \$79.00  
Info Pro ..... \$219.00  
Word Pro 2 Plus ..... \$159.00  
Word Pro 3 Plus ..... \$199.00  
Word Pro 4 Plus ..... \$299.00  
Word Pro 5 Plus ..... \$299.00  
Administrator ..... \$379.00  
Word Pro 84 ..... \$79.95

**CAROCO VIC 20/CBM 64**

Light Pen ..... \$32.00  
Cassette Interface ..... \$29.00  
Parallel Printer Interface ..... \$64.00  
3Slot Expans. Interface (20 only) ..... \$32.00  
6Slot Expans. Interface (20 only) ..... \$79.00

**HES**

Shamus (ROM) ..... \$29.00  
Protector (ROM) ..... \$32.00  
Robot Panic (ROM) ..... \$29.00  
Pirates (ROM) ..... \$29.00  
HES Writer (ROM) ..... \$29.00

Call on our Large Selection of VIC 20 & CBM 64 Software, such as: EPYX, Microspec and Kansas City Software.

**SHARP**



**PC-1500 POCKET COMPUTER \$169.**

**PC1250... \$89.00**

CE150 Printer, Plotter and Cassette Interface Unit ..... \$172.00  
CE152 Cassette Recorder ..... \$62.00  
CE155 6K Ram Expans. Mod. .... \$94.00  
CE125 Printer/Micro Cass. .... \$129.00  
Statistics Pack ..... \$49.00

**computer mail order west**

**800-648-3311**

IN PA. CALL (717)327-8575

DEPT. 615, 477 E. THIRD ST., WILLIAMSPORT, PA 17701

No risk, no deposit on C.O.D. orders. Pre-paid orders receive free shipping within the UPS Continental United States with no waiting period for certified checks or money orders. Add 3% (minimum \$3.00) shipping and handling on all C.O.D. and credit card orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. NOTE: We stock manufacturer's and third party software for most all computers on the market. Call today for our new catalog.

# computer mail order



Call for price and information on the NEW FRANKLIN Computers! Disk Drives, Software and System Specials ALSO AVAILABLE!



- DISK DRIVES FOR ATARI**
- AT88-S1 ..... \$399.00
  - AT88-A1 ..... \$299.00
  - AT88-S2 ..... \$649.00
  - RFD 40-S1 ..... \$549.00
  - RFD 40-A1 ..... \$349.00
  - RFD 40-S2 ..... \$689.00
  - RFD 44-S1 ..... \$679.00
  - RFD 44-S2 ..... \$999.00

### FLOPPY DISKS MAXELL

- MD II (Box of 10) ..... \$32.00
- MD II (Box of 10) ..... \$44.00
- FD I (8") ..... \$40.00
- FD II (8") DO) ..... \$50.00

### VERBATUM

- 5 1/4" SS DD ..... \$26.00
- 5 1/4" DS DD ..... \$38.00

### ELEPHANT

- 5 1/4" SS DD ..... \$19.99
- 5 1/4" SS DD ..... \$24.99
- 5 1/4" DS DD ..... \$29.99

### HEAD

- Disk Head Cleaner ..... \$14.95

### RANA DISK DRIVES

Elite 1 plus (Apple/Franklin) ..... CALL  
1000 (Atari) ..... CALL

### SYSCOM

48K Color Computer  
APPLE COMPATIBLE  
**\$599.**

### VIBICORP

for Apple, IBM & Franklin  
Visidex ..... \$189.00  
Visifile ..... \$189.00  
Visiplot ..... \$179.00  
Visiterm ..... \$89.00  
Visitrend/Plot ..... \$229.00  
VisiSchedule ..... \$229.00  
Desktop Plan ..... \$189.00  
Visicalc (Apple II, CPM, IBM) ..... \$179.00  
Visicorp prices for IBM may vary slightly.

### BROOKSUNG

- Apple Panic ..... \$23.00
- David's Magic ..... \$27.00
- Star Blazer ..... \$25.00
- Arcade Machine ..... \$34.00
- Choplifter ..... \$27.00
- Serpentine ..... \$27.00

### INFOCOM

- Deadline (Apple, IBM, Atari) ..... \$35.00
- Star Cross ..... \$29.00
- Zork I, II or III ..... \$29.00

### MPC

- Bubdisk (128K Non Volatile) ..... \$649.00

### AXLON

- Apple/Franklin 128K Ram ..... \$399.00
- Apple/Franklin Ram Disk ..... \$999.00

### KRAFT

- Apple Joystick ..... \$44.00

### CONTINENTAL

**SOFTWARE**  
Tax Advantage (Apple/Atari) ..... \$45.00  
Home Accnt. (Apple/Atari) ..... \$59.00  
1st Cl. Mail/Form Letter (Apple) ..... \$79.00  
The Book of Apple ..... \$14.95  
The Book of Atari ..... \$14.95  
The Book of Apple Graphics ..... \$14.95

### SIRIUS

- Bandits (Apple) ..... \$26.00
- Bear Run (Apple) ..... \$24.00
- Free Fall (Apple) ..... \$24.00
- Sneakers (Apple) ..... \$24.00
- Snake Byte (Apple) ..... \$24.00
- Fast Eddie (Atari) ..... \$21.00
- Turmoil (Atari) ..... \$21.00
- Deadly Duck (VIC) ..... \$21.00

### INTERFACES & ACCESSORIES

- 80 Column Apple Card ..... \$159.00
- Apple Paral. Printer Interface ..... \$89.00
- Atari 850 to Paral. Printer Cable ..... \$29.00
- RS232-RS232 Cables ..... \$29.00
- Centronics Paral. Paral. Cables ..... \$29.00
- Call on IBM, Osborne, Daisywriter, Atari, Commodore, Apple and Franklin Interface Cards, Cables and Accessories.

### HEWLETT PACKARD



41CV  
**\$209**



### HP75... \$749.

- HP 41C ..... \$149.00
- HP 10C ..... \$59.00
- HP 11C ..... \$72.00
- HP 12C ..... \$99.00
- HP 15C ..... \$99.00
- HP 16C ..... \$99.00

### For HP41/41CV

- HPIL Module ..... \$99.00
- HPIL Cassette or Printer ..... \$359.00
- Card Reader ..... \$144.00
- Extended Functions Module ..... \$64.00
- Time Module ..... \$64.00
- Mathematics Pac ..... \$26.50
- Real Estate Pac ..... \$40.00



## HOME COMPUTERS

### ATARI 800 48K \$289.\*

\*Reflects \$100.00 ATARI Rebate!

**ATARI 600-16K  
\$199.**

**ATARI 1200-64K  
NOW IN STOCK!**



**ATARI 400**  
18K ..... CALL  
32K ..... CALL  
48K ..... CALL  
64K ..... CALL

- 810 Disk Drive ..... \$429.00
- Inhome Keyboard/Atari 400 ..... \$89.00
- 1010 Program Recorder ..... \$74.00
- 1020 40 Column Print/Plot ..... \$269.00
- 1025 80 Column Printer ..... \$489.00
- 1027 Letter Quality Printer ..... \$299.00
- 1050 Double Density Drive ..... \$379.00
- 830 Acoustic Modem ..... \$159.00
- 850 Interface Module ..... \$189.00
- CX40 Pair Joysticks ..... \$16.00
- CX418 Home Manager Kit ..... \$89.00
- CX419 Bookkeeper Kit ..... \$195.00
- CX482 Educator Kit ..... \$129.00
- CX483 Programmer Kit ..... \$54.00
- CX488 Communicator Kit ..... \$229.00
- CX7101 Entertainer Kit ..... \$89.00
- Invitation to Programming I ..... \$18.00
- Invitation to Programming II ..... \$20.00
- Invitation to Programming III ..... \$20.00
- 4002 Basic Language ..... \$42.00
- 4003 Assembler Editor ..... \$47.00
- 8121 Micro Assembler ..... \$89.00
- 8126 Micro Soft ..... \$89.00
- 405 Pilot (Edu) ..... \$105.00
- 4018 Pilot (Home) ..... \$72.00
- 8036 Atari Writer ..... \$79.00
- 404 Word Processor ..... \$119.00
- 5059 Visicalc ..... \$159.00

### ATARI

- Pacman ..... \$33.00
- Centipede ..... \$33.00
- Defender ..... \$33.00
- Galaxian ..... \$33.00
- Missile Command ..... \$29.00
- Star Raiders ..... \$33.00
- Caverns of Mars ..... \$32.00
- Dig Dug ..... \$33.00
- Donkey Kong ..... CALL
- E.T. Phone Home ..... \$39.00
- Eastern Front (1941) ..... \$39.00
- QIX ..... \$33.00
- Superman III ..... \$39.00
- Star Trux ..... \$33.00
- Asteroids ..... \$29.00
- Basketball ..... \$29.00
- Computer Chess ..... \$29.00
- Juggles House ..... \$23.00
- My First Alphabet ..... \$29.00

### APX

- Text Formatter ..... \$18.50
- Family Budgeter ..... \$18.50
- Eastern Front ..... \$24.00
- Family Cash ..... \$18.50
- Jukebox ..... \$13.50
- Downhill ..... \$18.50
- Outlaw ..... \$18.50
- Holy Grail ..... \$24.00
- Player Piano ..... \$18.50
- Keyboard Organ ..... \$18.50
- Number Blast ..... \$13.50
- Frogmaster ..... \$18.50
- 747 Land Simulator ..... \$18.50
- Bumper Pool ..... \$13.50

### ON-LINE

- Jawbreaker ..... \$27.00
- Softporn ..... \$27.00
- Wizard and Princess ..... \$29.00
- The Next Step ..... \$34.00
- Mission Asteroid ..... \$22.00
- Mouskattack ..... \$31.00
- Frogger ..... \$31.00
- Cross Fire (ROM) ..... \$36.00

Some ON-LINE Products are also available for Apple & IBM.

Call for information!

### SYNAPSE

- File Manager 800 plus ..... \$69.00
- Chicken (ROM) ..... \$34.00
- Picnic Paranoia (ROM) ..... \$34.00
- Claim Jumper (ROM) ..... \$34.00
- Silme (ROM) ..... \$34.00
- Shamus (ROM) ..... \$34.00
- Protector (ROM) ..... \$34.00
- Dodge Racar (C/D) ..... \$26.00
- Nautilus (C/D) ..... \$26.00
- Shadow World (C/D) ..... \$26.00
- Survivor (C/D) ..... \$26.00
- Drehs (C/D) ..... \$26.00
- Necromancer (C/D) ..... \$26.00
- Pharoh's Curse (C/D) ..... \$26.00
- Fort Apocalypse (C/D) ..... \$26.00
- Page 8 ..... \$19.00
- Assembler ..... \$30.00
- Disk Manager ..... \$24.00

### DATABOFT

- Pacific Coast Highway ..... \$25.00
- Canyon Climber ..... \$25.00
- Tumble Bugs ..... \$25.00
- Shooting Arcade ..... \$25.00
- Clowns and Balloons ..... \$25.00
- Graphic Master ..... \$30.00
- Graphic Generator ..... \$13.00
- Micro Painter ..... \$25.00
- Text Wizard ..... \$79.00
- Spell Wizard ..... \$64.00
- Bishop's Square ..... \$25.00
- Sands of Egypt ..... \$25.00
- Moon Shuttle ..... \$25.00
- Zaxxon ..... \$29.00

### ALIEN

- Atari Voice Box ..... \$119.00
- Apple Voice Box ..... \$149.00

### MEMORY

- Axlon 32K Ram ..... \$89.00
- Axlon 48K Ram ..... \$139.00
- Axlon 128K Ram ..... \$399.00
- Intec 32K Board ..... \$74.00
- Intec 48K Board ..... \$99.00
- Intec 84K Board (400 only) ..... \$149.00

### WICO

- Joystick ..... \$24.95
- Famous Red Ball ..... \$28.95
- Apple Trackball ..... \$59.00
- Atari/VIC Trackball ..... \$55.00
- Apple Adaptor ..... \$18.00

### CSS

- K-razy Shoot Out ..... \$32.00
- K-razy Kritters ..... \$32.00
- K-razy Antics ..... \$32.00
- K-star Patrol ..... \$32.00
- Stick Stand ..... \$5.99

### EPYX

- Crush, Crumble & Chomp ..... \$24.00
- Crypt of the Undead ..... \$24.00
- Curse of Re ..... \$16.00
- Datstones & Ryn ..... \$16.00
- Invasion Orion ..... \$19.00
- King Arthur's Hair ..... \$24.00
- Morloc's Tower ..... \$16.00
- Rascua at Rigel ..... \$24.00
- Ricochet ..... \$16.00
- Star Warrior ..... \$29.00
- Temple of Ashal ..... \$29.00
- Upper Reaches of Ashal ..... \$16.00

### SPINNAKER

- Snooper Troops # 1 ..... \$34.00
- Snooper Troops # 2 ..... \$34.00
- Face Maker ..... \$24.00
- Story Machine ..... \$24.00
- Delta Drawing ..... \$45.00
- Rhymes and Riddles ..... \$21.00
- Kindercomp ..... \$21.00

### ROKLAN

- Wizard of War (ROM) ..... \$34.00
- Deluxe Invader (ROM) ..... \$29.00
- Gorf (ROM) ..... \$34.00

### FIRST STAR

- Astro Chase ..... \$25.00

### BIG 5

- Miner 49er ..... \$35.00

### GAMESTAR

- Baja Buggies ..... \$24.95
- Football ..... \$24.95

### BUDECO

- Raster Blastor ..... \$24.95

### L.J.K.

- Letter Perfect 40/80 Col. Disk ..... \$109.00
- Letter Perfect 40 Col. ROM ..... \$179.00
- Letter Perfect 80 Col. ROM ..... \$179.00
- Data Perfect 40/80 Col. Disk ..... \$99.00
- Mali Merge ..... \$21.95

### CALL FOR APPLE/LJK PRODUCTS

### BIT 3

- 80 Col. Card for Atari 800 ..... \$279.00

### INTEC

- Real Time Clock ..... \$39.00

We also stock software by: Adventure International, Eduware, Creative Software, Dorsett Educational, IDSI, Romox and Artworx. Call for details and prices

## computer mail order east



# 800-233-8950

IN NV. CALL (702) 566-5654

DEPT. 815, P.O. BOX 6889, STATELINE, NV. 89449


INTERNATIONAL ORDERS: All shipments outside the Continental United States must be pre-paid by certified check only. Include 3% (minimum \$3.00) shipping and handling. EDUCATIONAL DISCOUNTS: Additional discounts are available from both Computer Mail Order locations to qualified Educational Institutions. APO & FPO: Add minimum \$5.00 shipping and handling.

Circle No. 77

computer mail order east

# FREE!

## A six-pack of tasty Apple\*\* posters!

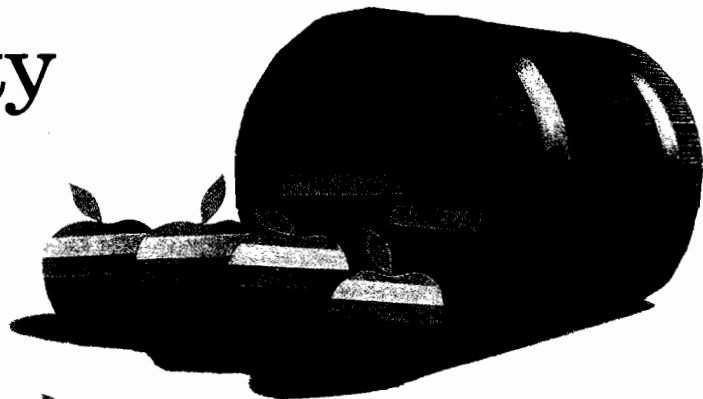

Here's your chance to get any or all of these beautiful 16 x 24 posters Free! except for just a small postage/handling charge! Commissioned by Datamost, and painted by well-known computer artist, Art Huff, each is a unique experience in design that will grace your home or office.

To get your posters, visit your favorite computer store and pick up a coupon where you see the counter display shown below. Fill out the coupon and mail it to Datamost. For each individual poster you want Free, include a registration card from any Datamost software package. Send only \$1.75 postage/handling fee with each order. (Note. Without a Datamost registration card, the Posters are available at only \$5.95 each, plus same postage/handling charge.)


Be the first to collect the entire series of these magnificent exclusive, and FREE Apple\* posters from Datamost!



Look for this poster display at your computer store.



8943 Fullbright Ave., Chatsworth, CA 91311. (213) 709-1202  
Copyright 1983 Datamost Inc.

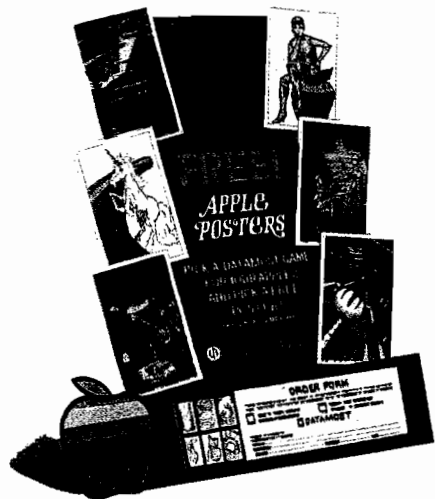

### YES! I Want To Participate in the Datamost FREE APPLE\* POSTER OFFER

Please sign us up and send me a complimentary set of the Six full color Apple Posters.

I would like: \_\_\_\_\_ window banners.  
\_\_\_\_\_ counter cards w/coupons.

Name: \_\_\_\_\_ Title \_\_\_\_\_

Store/Business Name \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Mastercard \_\_\_\_\_ Visa \_\_\_\_\_ No. \_\_\_\_\_



8943 Fullbright Ave., Chatsworth, CA 91311 (213) 709-1202

\*The posters are exclusive products of Datamost, Inc. and are not connected with, or authorized by Apple Computer, Inc.  
\*\*Apple is a trademark of Apple Computer, Inc.

**Electronic Report Card**

The Report Card, for the Apple, tracks the progress of up to 300 students per diskette. The program calculates student and class averages and ranks students within their class. Exercises, quizzes and tests can be individually weighted for their effect on the final grade. The manual includes a reference section and a tutorial for ease of use.

Price is \$60.00 available from Sensible Software, 6619 Perham Drive, W. Bloomfield, MI 48033; (313) 399-8877.

**Physics Packages for the Apple**

**Harmonic Motion Workshop, Projectile Motion Workshop, and Charged Particle Workshop** are the first three in a series of packages being developed by a former college Physics professor. The Harmonic Motion Workshop visually presents the concepts associated with harmonic motion by use of high-resolution graphics. The student can alter such variables as the phase, amplitude, and damping factor and immediately see the effect. Projectile Motion Workshop is designed to illustrate projectile motion under the influence of a uniform force of gravity.

In this program, the user may control the projectile's initial velocity and its angle of fire. Charged Particle Workshop simulates the motion of a charged particle under the influence of various combinations of electric and magnetic fields: uniform electric field, uniform magnetic field and crossed electric-magnetic field are illustrated.

The packages require a 48K Apple with Applesoft in ROM and Disk II. Price is \$75.00 each. Available from your local computer retailer or High Technology Software Products, Inc., 1611 N.W. 23rd Street, P.O. Box 60406, Oklahoma City, OK 73106, (405) 525-4359.

**Serpent Game for Atari**

In **Serpentine** for the Atari 400/800, giant serpents set forth to slay their slithery cousins. The snakes lay eggs and fight ferociously to protect their young. A fast arcade-style game with five maze configurations and many levels of play.

Price is \$39.95. Available from Broderbund Software, Inc., 1938 4th St., San Rafael, CA 94901; (415) 456-6424.


**Apple Tax Planner**

**Tax Planner** helps minimize personal tax liability through year-round planning. The pro-

(continued on page 112)

**AIM + POWER**  
from **COMPUTECH**

All prices  
**Postpaid**  
(Continental  
U.S. —  
otherwise  
\$2 credit)



Check the  
**outstanding**  
**documentation**  
supplied with  
AIM65

**Top quality** power supply designed to Rockwell's specs for fully populated AIM 65 — includes overvoltage protection, transient suppression, metal case and power cable:

PSSBC-A (5V 2A Reg; 24V .5A Avg, 2.5A Peak, Unreg) ...\$64.95  
Same but an extra AMP at 5 volts to drive your extra boards:  
PSSBC-3 (5V 3A Reg; 24V .5A Avg, 2.5A Peak, unreg) ...\$74.95

The **professional's** choice in microcomputers:

AIM65/1K RAM . . . . . \$429.95 BASIC (2 ROMS) . . . . . \$59.95  
AIM65/4K RAM . . . . . \$464.95 ASSEMBLER (1 ROM) .. \$32.95  
FORTH (2 ROMS) ..... \$59.95.

**SAVE EVEN MORE ON COMBINATIONS**

AIM65/1K + PSSBC-A . \$479.95 AIM65/4K + PSSBC-3 . \$524.95  
We gladly quote on all AIM65/40 and RM65 items as well.

ORDERS: (714) 369-1084

P.O. Box 20054 • Riverside, CA 92516  
California residents add 6% sales tax



Circle No. 79

**Apple Tree Electronics**

**DISKS**

Maxell Box of 10, 5 1/4", SS-DD \$29.00

**HARDWARE**

**FRANKLIN ACE 1000**

The Professional Personal Computer  
**INTRODUCTORY PACKAGE**



- Franklin Ace 1000
- 1-Disk drive
- Green Monitor

**\$1595**

**MONITORS**

**CALL FOR THIS MONTHS SPECIAL!**

1-800-835-2246 EXT. 211

OR  
702-452-5589



5130 East Charleston Blvd.  
Suite 4M  
Las Vegas, Nevada 89122



Add \$3.00 for shipping, handling and insurance.  
Nevada residents add 5.75% sales tax. Please include phone number.

Equipment subject to price change and availability.  
Call or write for price list.

Circle No. 80

gram is designed for tax practitioners, estate planners and attorneys, plus banks and trusts who do income tax projections for clients. The Planner helps build client data bases for use during subsequent tax seasons and in serving more clients. Individuals who do their own financial planning will also find the Planner helpful.

User-modifiable parameter files for each year permit long-range tax-planning options. Up to four client data files can be handled at once — the first to hold current data, additional files to reflect assumed data changes. Up to four different assumption data

files for a given year and tax calculations for four different years can be programmed.

Tax Planner cost is **\$300.00** available from CPAids, 1061 Fraternity Circle Drive, Kent, OH 44240; (216) 678-9015.

**Commodore Products**

The **64-RABBIT** is a high-speed cassette interface on ROM cartridge that adds 12 commands to BASIC. The new RABBIT save, load, and verify commands operate five times faster than the normal BASIC commands. Other commands include load/

run, test memory, decimal to hexadecimal conversion, hex to decimal conversion, and more.

RABBITS are also available for the VIC-20 and PET 4001, 8001, and 8032. Price is **\$39.95**.

MAE (Macro Assembler and Text Editor) is a professional development tool based on the well-known Apple-, PET-, and ATARI-MAE. Features include: 38 error codes, 27 commands, 26 pseudo ops, and 5 conditional assembly operators, built-in software UART (110-9600 baud), and macro, conditional assembly, and interactive assembly capability.

Text editor features in-

clude autoline numbering, find, exchange string, copy, move, renumber, delete lines, and append. Word processor features include right and left justify, center, set margins, define text body shape, headers, and footers.

All MAEs are priced at **\$99.95**.

Our Software and hardware catalogs list the newest and most pertinent products on the market. The easy-to-read entries offer quick information for our readers. Use these catalogs to present your products. Send your press releases to: MICRO INK, P.O. Box 6502, Amherst, NH 03031



**C COMPILERS—COMMON FEATURES:**

- UNIX VER 7 compatibility • standard float, double, and long support • run time library with full I/O and source • fast compilation and execution • full language.

**AZTEC C II CP/M (MP/M) \$199**

- produces relocatable 8080 source code • assembler and linker supplied • optional M80 interface • SID/ZSID debugger interface • library utility • APPLE requires Z80 and 16K card

**AZTEC C I APPLE DOS \$199**

- relocating assembler supplied • APPLE SHELL • VED editor • library and other utilities • requires 16K card

**C86 IBM PC MSDOS CP/M-86 \$249**

- directly produces 8088/8086 object code • linker supplied

Manuals—\$30 ORDER BY PHONE OR BY MAIL—Specify products and disk format

**MANX**  
software systems

Box 55, Shrewsbury, N.J. 07701 (201) 780-4004



CP/M FORMATS: 8" STD. HEATH, APPLE, OSBORNE, NORTHSTAR, OUTSIDE USA—Add \$10 In NJ add 5% sales tax



**COMPU SENSE**

**CARDBOARD 3**

An Economy Expansion Interface (Motherboard) For the VIC-20® Personal Computer

The "CARDBOARD/3" is an expansion interface designed to allow the user to access more than one of the plug-in-type memory or utility cartridges now available. It will accept up to 3 RAM or ROM cartridges at once. For example:

- 16k RAM + 16k RAM + 3k RAM
- 16k RAM + 8k RAM + Super Expander
- 16k RAM + 8k RAM + Vic-Mon
- 16k RAM + 3k RAM + Programmer's Aid
- High quality T.R.W. gold plated connectors
- This board is fused
- 90 day free replacement warranty covering everything except the fuse

**\$39.95**

**CARDBOARD 6**

An Expansion Interface for VIC-20®

- Allows memory expansion up to 40K
- Accepts up to six games
- Includes a system reset button
- All slots are switch selectable
- Daisy chain several units for even more versatility

**\$87.95**

TO ORDER:  
P. O. BOX 18765  
WICHITA, KS 67218  
(316) 263-1095

Personal checks accepted (Allow 3 weeks) or C.O.D. (Add \$2)  
Handling charge \$2.00



Circle No. 82

VIC-20® is a registered trademark of Commodore

# MICRO™

## New Publications

**The Small Computer Connection**, by Neil L. Shapiro. A Micro Text/McGraw-Hill Copublication, 1221 Avenue of the Americas, New York, NY 10020, 1983, 190 pages, paperback. ISBN 0-07-056412-4 \$15.95

**Intermediate-Level Apple II Handbook**, by David L. Heiserman. Howard W. Sams & Co., Inc., 4300 West 62nd St., Indianapolis, IN 46268, 1983, 324 pages, paperback. ISBN 0-672-21889-5 \$16.95

**The World Connection**, by Timothy Orr Knight. Howard W. Sams & Co., Inc., 4300 West 62nd St., Indianapolis, IN 46268, 1983, 142 pages, paperback. ISBN 0-672-22042-3 \$9.95

**The McGraw-Hill Computer Handbook**, by Harry Helms. McGraw-Hill Book Company, 1221 Avenue of the Americas, New York, NY 10020, 1983, 992 pages. Hard cover. ISBN 0-7-027972-1 \$79.50

**6502 Assembly Language Programming**, by Judi N. Fernandez, Donna N. Tabler, & Ruth Ashley. John Wiley & Sons, Inc., 605 Third Ave., New York, NY 10158, 1983, 277 pages, paperback. ISBN 0-471-86120-0 \$12.95

**BASIC Exercised for the Atari**, by J.P. Lamorier. SYBEX, 2344 Sixth Street, Berkeley, CA 94710, 1983, 251 pages, paperback. ISBN 0-89599-101-2 \$12.95 plus \$1.50 S/H

**Doing Business with PASCAL**, by Richard Hergert & Douglas Hergert. SYBEX, 2344 Sixth Street, Berkeley, CA 94710, 1983, 371 pages, paperback. ISBN 0-89599-091-1 \$15.95 plus \$1.50 S/H

MICRO

# AIM GRAPHICS

Now you can have full-color, high-resolution graphics for your Rockwell AIM computer.

You get:

- 16 colors
- Text
- 192 x 256 Pixels

AIM Graphics includes its own 16K dynamic RAM memory, and uses no system RAM.

You get AIM Graphics, start-up software and data pack for \$175.00.

Call or write today to order or get more information.

Rockwell AIM is a trademark of Rockwell, International

# IT'S FREE!

Announcing the NEW, Summer 1983 Moore Computer Forms and Supplies Catalog



Now with a NEW 34-page computer forms section!

- Our new, 80-page Summer Catalog features more than 800 quality, brand-name products—all guaranteed to meet your 100% satisfaction or your money back
- For all your computer or word processor needs, a wide selection of magnetic media, disk storage, binders, ribbons and furniture
- Over 40 pages of multi-purpose computer forms and labels at low prices, including an ALL-NEW 34-page section of imprinted forms
- Unmatched customer services, like fast order processing, custom imprinting, emergency overnight delivery, plus exclusive toll-free Technical Product Assistance

Mail this coupon or call toll-free  
**1-800-323-6230**  
 (In Illinois, Call (312) 459-0210)



Catalog Group  
**MOORE BUSINESS CENTER**

A Division of Moore Business Forms

P.O. Box 20  
 Wheeling, IL 60090  
 Dept. 123411

**YES!** Send me a FREE 80-page, full-color copy of the Summer 1983 Moore Catalog

YOUR NAME \_\_\_\_\_ TITLE \_\_\_\_\_ BUSINESS PHONE \_\_\_\_\_

COMPANY NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

COMPUTER MAKE AND MODEL \_\_\_\_\_

TYPE OF BUSINESS \_\_\_\_\_ NO. OF EMPLOYEES \_\_\_\_\_

## DESIGN DYNAMICS

1830 Soscol Avenue  
 Napa, California 94559

**Yes! I want AIM Graphics!**

Name: \_\_\_\_\_

Firm: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ St \_\_\_\_\_ Zip \_\_\_\_\_

For immediate response, call now:  
 (707) 257-6000

## Hardware Catalog

### Atari Speech Synthesizer

**VOICE BOX II** for ATARI 400/800 computers requires a 32K disk system. It offers many features, including the abilities to speak with inflection, to speak in foreign languages with correct foreign spelling as input, and to sing with voice and 3-part music.

VOICE BOX II contains a library of 30 famous songs and a comprehensive music system that allows you to enter new songs easily.

Software provided can convert the bottom two rows of the Atari keyboard into a piano with a range of 3½ octaves using the shift and control keys. You can also have programmable musical sound effects such as tremolo, vibrato, and glissando.

Price is **\$169.00**. For more information, contact The Alien Group, 27 West 23rd Street, New York, NY 10010; (212) 741-1770.



**Voice Box II for ATARI**  
*Speech Synthesizer with Singing and Inflection*

### Z80 Card for the Apple IIc

The new **Premium SoftCard IIc** from Microsoft Corporation fits into the video slot of the Apple IIc and apparently will double many of the standard features of this new 8-bit personal computer.

The Z-80-based card comes with the CP/M 80 operating system, giving users access to the broad range of applications programs available for the 8-bit microcomputer world. It will also give access to software development tools not developed specifically to work with Apple DOS. Once installed, the user will specify which operating system by booting the appropriate Z80 or 6502A disk.

The card features 64K of random access memory, doubling the amount of memory standard with the Apple IIc. In addition, the card allows for an 80-column display.

Two versions of Microsoft's BASIC language interpreter are included. MBASIC supports the low-resolution graphics and GBASIC supports both the low- and high-resolution graphics.

Retail price for the card is **\$495**. It comes complete with 400 pages of documentation including CP/M and Microsoft BASIC Quick Reference Guides, and the Osborne manual on CP/M.

For more information contact Microsoft, 10700 Northupway, Bellevue, WA 98006; (206) 828-8080.

### Epson FX-80 Printer

The **Epson FX-80**, a high-performance bi-directional printer, combines a printing speed of 160 characters-per-second with features that provide sophisticated printing for a wide range of applications.

The FX-80 offers a software-selectable choice of elite (12 cpi) or pica (10 cpi) print spacing. In addition, users can send their own special fonts from their computer system to the printer, downloading the font into the printer's memory.

Other features include a one-to-one graphics ratio and a 2K-byte buffer, which allows buffered printing on longer productions. The FX-80 provides 9x9 dot-matrix characters with full descenders and is downward compatible with the Epson MX Series of printers. It offers proportional spacing, pin- and friction-feeds, and a standard parallel communications interface, with serial or IEEE 488 interfaces also available as options.

Normal, emphasized, bold and double-emphasized printing densities provide flexibility.

Price is **\$699.00**. Available through Epson retailers. For more information contact Epson America, 3415 Kashiwa Street, Torrance, CA 90505; (213) 539-9140.

### Color Computer Keyboard

**SUPER-PRO** replacement keyboard kit for TDP-100 and Radio Shack Color Computers offers complete compatibility and operator convenience.

Price is **\$69.95**. An additional plug adapter, priced at **\$4.95**, is required when upgrading computers manufactured after approximately October, 1982.


Available from dealer or Mark Data Products, 24001 Alicia Parkway, No. 226, Mission Viejo, CA 92691.

### Atari I/O Package

The MOSAIC I/O Package can help give the ATARI computer direct ties to the real world. The four ports on the front of the ATARI computer connect directly to a PIA for use as output as well as input ports. Now ATARI owners can build custom program controllers, interface to home control circuits, or use any hardware the imagination can devise.

The I/O Package comes with four, nine-pin connectors, four, twenty-four-inch lengths of nine conductor ribbon cable, and complete documentation for their use.

Order number H-309, Price \$18. Available from Mosaic Electronics, P.O. Box 748, Oregon City, OR 97045.

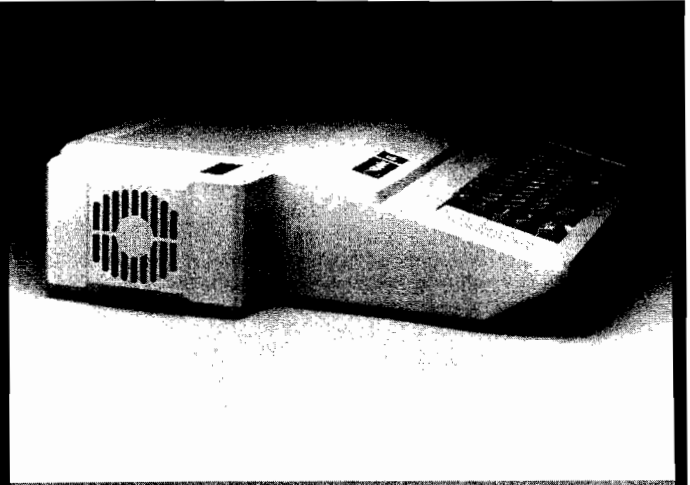

### *The Kensington Microwave System Saver Power Control*


#### Power Control for the Apple

Apple owners' high-tech power line problems are being solved a design approach that most electrical engineers would view as low tech using technology that has existed for decades. But the circuitry used in the company's UL-listed System Saver power control and protection accessory is effective and reliable, and inexpensive.

System Saver attaches to any Apple II, Apple II+, or Apple IIe, with or without an Apple monitor stand in

place. It replaces the Apple power cord, providing simultaneous control and protection to the Apple computer itself, to one or two accessories plugged into auxiliary outlets (rated at 8 Amps total) on the back of the System Saver case, and to its built-in cooling fan.

Price is \$89.95. For more information contact Kensington Microwave Ltd., 919 Third Ave., New York, NY 10022; (212) 486-7707.

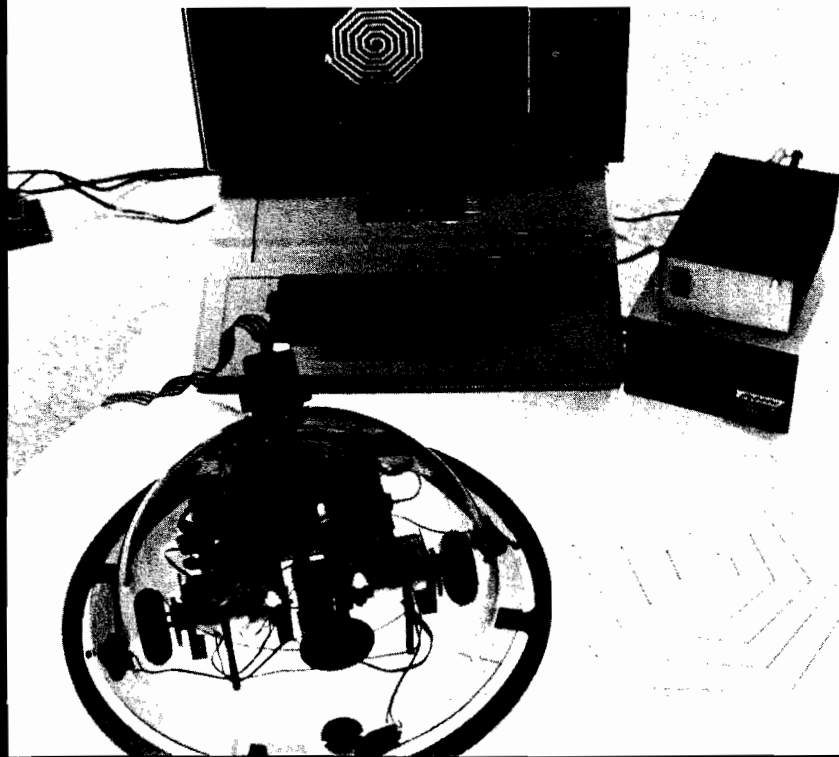

The **Tasman Turtle**, a programmable robot, is available for the Apple II or other parallel interface micros as well as those with an RS-232 interface. All turtles can move and turn, toot their horn, blink their eyes, draw with a pen and "feel" through touch sensors.

A talking version of Tasman comes with a basic vocabulary of 150 words, expandable to more than 600 words. Another option is an electronic compass that indicates directional change.

Prices begin at \$999.95. For more information contact Harvard Associates, Inc., 260 Beacon Street, Somerville, MA 02143; (617) 492-0660.

*The Tasman Turtle  
interfaced to an Apple II*



# SOFTWARE FOR THE HARDWARE

## THE PROFESSIONAL'S CHOICE FORTH — A Tool for Craftsmen!

It has been said that if Chippendale had made programs he would have used FORTH as his tool. If you want to learn how to program, use a teaching language—PASCAL or BASIC. If you know how to program, use a language designed for craftsmen—FORTH.

### FORTH Systems

For all FLEX systems: 6800 & 6809. Specify 5" or 8" diskette and hardware configuration. For standalone versions, write or call.

- \*\* tFORTH—extended fig-FORTH (1 disk) \$100 (\$15)
- \*\* tFORTH + —extended more! (3 5" or 2 8" disks) \$250 (\$25)
- tFORTH + includes 2nd screen editor, assembler, extended data types and utility vocabularies, GOING FORTH CAI course on FORTH, games, and debugging aids.

### TRS-80 COLORFORTH — 10K ROM Pack

Full screen editor. Will work on 4K, 16K, or 32K systems \$110 (\$20). Disk versions available.

### Applications Programs

- \*\* firmFORTH 6809 tFORTH + only \$350 (\$10)  
For target compilations to rommable code. Deletes unused code and unneeded dictionary heads. Requires tFORTH +.
- \*\* TINY PASCAL compiler in FORTH. 6800/09 \$75 (\$20)
- \*\* FORTH PROGRAMMING AIDS: Extensive debugging, decompiling, and program analysis tools. \$150 (\$10)

Manuals alone, price in (.). Add \$5/system for shipping. \$12 for foreign air.

### Talbot Microsystems

1927 Curtis Ave., Redondo Beach, CA 90278  
(213) 376-9941

(TM) tFORTH, COLORFORTH and firmFORTH are trademarks of Talbot Microsystems.  
(TM) FLEX is a trademark of Technical Systems Consultants.

Circle No. 85

# RAM

For ATARI  
with Lifetime Warranty

64K Board	(400)	\$150
48K Board	(400)	\$115
32K Board	(400/800)	\$ 90
Real Time Clock	(800)	\$ 50
16K Board	(VIC-20)	\$ 80

FREE SHIPPING ANYWHERE IN U.S.A.

INTEC  
PERIPHERALS  
CORP

906 E. Highland Ave.  
San Bernardino, CA 92404  
(714) 881-1533



VIC-20 is a Trademark of Commodore, Inc.  
ATARI, 400, 800 are Trademarks of ATARI, Inc.

Circle No. 86

# MICRObits

## Enhanced OS65D 3.3 C1P-MF

Many new functions such as system commands for catalog control, 10 active files, end of file/end of volume processing, background printing, file append, dynamic file buffers/sectors, command file processing, long string read command. Many more! \$30. Write for details. Ray Lydon, 20 Eastwood Dr., Grafton, OH 44044.

## OSI C1P Word Processor

Fast, Assembly Language Word Processor for 8K, Cassette-Based C1P or Superboard. Document storage on tape. Full screen edit. 9 Screens of text in 8K! Price: \$30. 16K version supports 8-32K with additional features. Price: \$35. Requires C1S Monitor ROM. Micro Chip's Software, 8104 NE 92nd Circle, Vancouver, WA 98662.

## The Cheap Assembler

Includes unlimited length labels, free field programming, two pass RAM/disk based assembly, ten command text editor, interactive operation, tutorial manual and demonstration routines. APPLE II+, 48K, DOS 3.3 required. Sold \$20.00 + \$4.00 P&H to: Thunder Software, P.O. Box 31501, Houston, TX 77231, 713-728-5501.

## Franklin Color Adapter

There is no E-Z-ER method. Our assembled boards are an absolute must for your Franklin Ace 1000. No cutting, wiring, or soldering required. \$50.00 + \$2.00 S/H. N.Y. residents + 7% DISPLAY SYSTEMS RESEARCH, 444 Front Street, Owego, NY 13827.

## OSI Programs

Quality programs for all OSI systems. Games, Full Screen Editor, Machine Code Tracer. On tape or 5 1/4" disk for C1, C2, C4 systems. Write for catalog. Available from DMP Systems or our many distributors. DMP Systems, 319 Hampton Blvd., Rochester, NY 14612.

## Payroll

Compatible with 64K Apple computers. Features: 100 employees per disk. Time card adding, automatic overtime, User changeable taxables, five miscellaneous deductions - fixed or percentage amounts, tips, automatic printing of checks, W-2 forms, and reports. Bill Martin, 6485 Diana Drive #2, Poland, OH 44514, (216) 757-2143.

## OSI - Game Set I

Two arcade games. Machine language (disk only) and Basic. Lunar Pro (Lunar Lander) with multiple screens, craft rotation, excellent graphics. Squeeze (ZAP) - defend your star-castle. Frustrating Arcade graphics. C1pmf, C4pmf, C1p. 6.5K. \$5 cassette/\$12 disk ppd. Fibware, Suite 15c, 1150 Fifth Ave., New York, NY 10028.

## AIM-65 Real Time Clock

Provides hour, minute, second, day of week, day, month, year, 12 or 24 hour format. Pin compatible with AIM expansion connector (also SYM, KIM). Four switch selectable interrupts. Nicad battery backup. Industrial quality board 4.5 x 6. All IC's socketed. Single 5V supply. 22 page manual. All software included. Bare board \$29. Complete A&T \$93, includes batteries. Add \$4 ship and handling. Calif. residents add 6%. DATA DESIGN GROUP, P.O. Box 3318, La Jolla, CA 92038, (619) 265-6940.

ACRO

# SPECTRUM PROJECTS

## Basic Aid

"An excellent program and fine utility."  
Rainbow Review—Aug. 82  
Single control key input of BASIC commands. \$34.95

## Spectrum Stick

"More like arcade joysticks than anything we've yet encountered."  
Rainbow Review—Oct. 82  
Response and control put the joy back in color computing. \$39.95

## Colorcom/E

"Out of thousands of programs, this program... SUPER!"  
80-US Review—Nov. 82  
A smart communications package. Disk or Rompack \$49.95

## CoCo/EAD

Color Computer Editor, Assembler and Debugger  
\$6.95

**Spectrum Paddle** For quicker side-to-side action and higher scores. \$19.95

CALL NOW  
212-441-2807  
FOR FAST DELIVERY  
All orders plus \$2 shipping

SEND TO  
DEPT. C2 93-15 86TH DRIVE  
WOODHAVEN, N.Y. 11421  
NY residents add sales tax

Circle No. 87

# OSI Disk Users


**Double your disk storage capacity  
Without adding disk drives**

Now you can more than double your usable floppy disk storage capacity—for a fraction of the cost of additional disk drives. Modular Systems' DiskDoubler™ is a double-density adapter that doubles the storage capacity of each disk track. The DiskDoubler plugs directly into an OSI disk interface board. No changes to hardware or software are required.

The DiskDoubler increases total disk space under OS-65U to 550K; under OS-65D to 473K for 8-inch floppies, to 163K for mini-floppies. With the DiskDoubler, each drive does the work of two. You can have more and larger programs, related files, and disk utilities on the same disk—for easier operation without constant disk changes.

Your OSI system is an investment in computing power. Get the full value from the disk hardware and software that you already own. Just write to us, and we'll send you the full story on the DiskDoubler, along with the rest of our growing family of products for OSI disk systems.

™DiskDoubler is a trademark of Modular Systems.



Post Office Box 16C  
Oradell, NJ 07649.0016  
Telephone 201 262.0093

Circle No. 88

# HARDWARE AND SOFTWARE FOR THE

## VIC 20® & COMMODORE 64®

### Software

ZAP! - Climbing the corporate ladder could be fun except for all that falling paperwork. This Hires arcade type game allows up to 4 players to advance through each floor to scale the corporate ranks. Be careful, it's easy to be ZAPPED! CARTRIDGE for VIC 20® **\$29.95**

ATE-PAK - Eight graphic games on tape with complete manual to explain gaming techniques. For VIC 20® **ONLY \$24.95**

Word Wizard For The VIC 20® - (Requires at least 8K memory expansion) A user friendly WORD PROCESSOR with optional joystick control. Easy edit and string manipulation commands. Full use of function keys, Delete Word, Search functions and Full Justification. Use VIC 20® printer, or any Centronics compatible printer connected to the user port. On Tape (supports disk). **\$34.95**

Bomber Word - A unique graphic word game on cartridge that provides the full thrill of arcade action. Complete with six modes of play options for added enjoyment. Play against the computer or another player. 6 to adult. For VIC 20® **\$29.95**

Tic Attack - A fast action arcade game on Cartridge that challenges all of your dexterity. Written in machine language for special audio & visual effects. Over 100 levels of play. High score indication. For VIC 20® **\$29.95**

Dot-A-Lot - As you wander through life collecting Berries, you happen upon some magical fruit. Pick one and the treasures appear, but the Meanies are out today looking to spoil your fun. Defeat them and continue on to a higher level. An ever changing maze plus arcade type animation to provide a real winning CARTRIDGE for the VIC 20® **\$29.95**

Triple Play - Three games that are both fun and educational. CROSSWORDS (requires at least 8K expansion). Five complete puzzles are included. CRYPTOSOLVE will help you solve those cryptic messages found in newspapers, and magazines with a systematic computer technique. Included are approximately 50 different puzzles. You can even enter your own cryptic messages. HIDDEN WORDS will display a matrix of seemingly random letters on the screen. You should be able to find many words. Included are approximately 25 different puzzles. For VIC 20® **ONLY \$29.95 for all 3**

KEYQUEST - Our exciting new Arcade type game that takes you through the many levels of an ancient dungeon while gathering treasures and gaining experience points. Monsters, magical keys, and hidden passages all add to the excitement. ON CARTRIDGE for VIC 20® **ONLY \$34.95**

SKETCH PAD & CHAR-GEN - A high resolution drawing program that will allow you to save your pictures to tape. Also included is a simple to use character generator that will allow you to design a different character for every printable key. Create game creatures, foreign alphabets, secret symbols or other special characters. One set is included. On tape for the VIC 20® **\$24.95**

\*\*\*\*\*

### Hardware

Expand-O-Ram - 16K Expansion Board for the VIC 20® with reset, memory write protect, full memory allocation, plus TWO slots. Like having 2 products in 1. Can be used as a cartridge development system too. **\$119.00**

Universal Tape Interface & Duplicator - (Use on the Commodore 64® and VIC 20®). With this device, you can easily load, save or even duplicate tapes with your standard recorder. Full 3 LED indication of Data transfer. A reliable way to Load, Save and Duplicate. NOTE: Duplication requires 2 standard cassette recorders. **Only \$49.50**

TYMAC BUFFERED PARALLEL CABLE WITH DRIVER - For the VIC 20® & Commodore 64®. This cable assembly plugs into the USER Port and provides a simple and inexpensive way to connect a PARALLEL Printer to your computer. **ONLY \$19.95**

DRIVER CARTRIDGE for VIC 20® - Take full advantage of the capabilities of your Parallel Printer including full Commodore graphics and formatting. Available for SEIKOSHA, C.I.TOH, OKIDATA, and others. Specify printer. **ONLY \$29.95**

TYMAC "CONNECTION" - A truly intelligent parallel interface for the VIC 20® and Commodore 64®. It will make your printer operate like the COMMODORE Printer including graphics, text symbols, tab's, and virtually every other printer function. Plugs into the serial socket. Available for most popular parallel printer. **\$119.00**



Dealer and Distributor  
Inquiries Invited  
201-438-9027

1342B Route 23, Butler, N.J. 07405



NOTE: We solicit hardware and software items for the VIC 20® and Commodore 64 Royalties, license fees, or outright purchases can be negotiated. Commodore 64® & VIC 20® are Registered Trademarks of Commodore Business Machines, Inc.

The  
**MIDNITE**  
SOFTWARE GAZETTE

The  
**PAPER**

A Bi-Monthly Journal of Notes,  
Reviews and Articles  
Five Years of Service to the PET® Community



**First**  
The Independent U.S. Magazine for  
Users of Commodore Brand Computers

EDITORS: Jim and Ellen Strasma  
\$20 US / YEAR

Sample Issue free on request, from:  
635 MAPLE, MT. ZION, IL 62549 USA  
217/864-5320

Circle 90

## OHIO COMPUTER CAMP

"GIVE YOUR CHILD A BETTER CHANCE  
IN A CHANGING WORLD!"



One of the finest computer summer camps in the nation! Now in our third season, Atari Learning Center this year will offer complete recreational, cultural and social camaraderie in conjunction with Denison University. Full motel-resort facilities (swimming, sauna, tennis, etc.) and at least 6 hours every day of hands-on computer learning.

Spacious, comfortable rooms and meals at the college dorms. PLUS....mid-course weekend break at Kings Island and the fabulous Kings Island Resort Inn!

COMPARE OUR LOWER COST FEE structure before you send your child to any other camp. Reservations accepted now for two and four week sessions June 13 through August 5. Restricted to 40 co-ed students, ages 9-18, per session.

For Free information packet call:  
614-454-6408 or 349-8448

or write to:  
Mitey Byte Corporation  
1325 Maple Ave., Zanesville, Ohio 43701

Circle No. 91

# MICRO™

## Reviews in Brief

Product Name: **Disk Data Handler**  
Equip. req'd: TRS-80 Color Computer 32K Disk  
Price: \$44.95 + \$1.00 Shipping  
Manufacturer: Custom Software Engineering, Inc. (D-8)  
807 Minutemen Causeway  
Cocoa Beach, FL 32931

**Description:** *Disk Data Handler* is a database management system for the Color Computer. On-screen editing and high-speed record sort and selection is featured. The BASIC program with machine-language subroutines allows you to create fields and records that will fit your specific needs.

**Pluses:** The program is easy to learn and has powerful sort and select features. Both quick and extended files are available. Extended files are stored on disk and are retrieved by keyed quick files. Reports are easy to generate and report command files can be read that will format and print any desired report. The program will create files of selected data for additional processing by your BASIC programs.

**Minuses:** The disk-handling routines are not error trapped. Care must be used to specify correct file specifications otherwise the program will crash. The documentation does warn where this will happen. The report feature has many powerful aspects, but it lacks the ability to generate headings or pagination. No computation is possible in files.

**Documentation:** A 12-page instruction sheet is included that explains the operation of the program. Techniques of accessing and computing numeric data are included as is a Stock Tracker program.

**Skill level required:** A knowledge of data handling and file-creation techniques is helpful but not required.

**Reviewer:** John Steiner

Product Name: **Ultra 80CC**  
Equip. Req'd: Color Computer with 32K memory  
Price: \$49.95 (Disk only)  
Manufacturer: Spectral Associates  
141 Harvard Ave.  
Tacoma, WA 98466

**Description:** *Ultra 80CC* is an old friend in disguise for many 6809 users; it is TSC's editor and 6809 mnemonic assembler, adapted for the Color Computer. This software is used on most 6809 systems running Flex, and this adaptation makes fully professional software available for Color Computer owners. The adaptation includes tape read and write from the editor and printer output for both modules. (I/O is normally furnished by Flex.) Both modules operate from command lines similar to those



used by most DOS packages, so the user who later upgrades to a DOS will already be familiar with this type of operator communication. The Editor is an exceptionally powerful content-oriented line editor with a full complement of edit, search, copy, and delete functions. Full mastery of the editor's capabilities will take some time, but simple editing is quickly learned. The assembler has full macro and conditional assembly capability and ten assembly-time options including print-format options. Source files should be produced by the editor, but tape files probably can be read by the editor and written to disk. Object code is returned to disk and then the file can be accessed by the Radio Shack DOS.

**Pluses:** Exceptional quality at a very low cost. Short learning curve to get started, with reserve power as the user learns more about the programs. Very smooth operation with Radio Shack DOS and various debugger programs.

**Minuses:** None noted; some similar products offer a debug monitor at the same price, but the quality in this package makes it a bargain.

**Documentation:** The manual includes over 100 pages devoted to use of the two programs, 6809 assembly-languages procedures, and addenda detailing the special features in the CoCo adaptation.

**Experience level required:** Some assembly language experience will ease the learning process, but a diligent beginner should be able to use this package to good advantage.

**Reviewer:** Ralph Tenny

Product Name: **Apple Mechanic**  
 Equip. req'd: Apple II, 48K  
 Price: \$29.50  
 Manufacturer: Beagle Bros.  
 4315 Sierra Vista  
 San Diego, CA 92103

**Description:** This new Apple utility contains a shape-defining/manipulating program, a disk zap program, and a collection of "two liners."

**Pluses:** The shape program includes several character set fonts that do not require any extra drawing code. The Applesoft DRAW command is entirely sufficient. The program for modifying fonts is without question the best available.

**Minuses:** Not many. Perhaps the manufacturer should have used examples of greater educational value in the "Byte Zap" program user's manual.

**Documentation:** Well written, informative, and entertaining.

(continued)

# BASF DISKS

LIFETIME  
GUARANTEE

HUB-RINGED

CERTIFIED  
ERROR FREE

SSDD

5 1/4"

DSDD

\$21.90 ea. — 1-9 Boxes — \$30.90 ea.

\$19.90 ea. — 10+ Boxes — \$28.90 ea.

## FREE PLASTIC CASE WITH EACH BOX

SEND ME YOUR PRICE LIST

SEND ME \_\_\_\_\_ BOXES AT \$ \_\_\_\_\_ PER BOX

ADD 3% SHIPPING/HANDLING (\$3.00 MINIMUM)  
TWO WEEK DELAY FOR PERSONAL CHECKS

PAYMENT ENCLOSED \$ \_\_\_\_\_

(Texas residents add 5% sales tax.)

CHARGE MY:  MasterCard  Visa

Card No. \_\_\_\_\_ Exp. Date \_\_\_\_\_

Signature \_\_\_\_\_

Name \_\_\_\_\_  
(please print full name)

Address \_\_\_\_\_ Apt. \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

214-644-2611

Circle No. 92

O6E



Software  
't' Boot

2116 E. Arapaho #600  
Richardson, Tx 75081



## C64-FORTH

for the Commodore 64

FORTH SOFTWARE FOR THE COMMODORE 64

C64-FORTH (TM) for the Commodore 64 - \$99.95

- Fig Forth-79 implementation with extensions
- Full feature screen editor and macro assembler
- Trace feature for easy debugging
- 320x200, 2 color bit mapped graphics
- 16 color sprite and character graphics
- Compatible with VIC peripherals including disks, data set, modem, printer and cartridges
- Extensive 144 page manual with examples and application screens
- "SAVETURNKEY" normally allows application program distribution without licensing or royalties

C64-XTEND (TM) FORTH Extension for C64-FORTH - \$59.95  
(Requires original C64-FORTH copy)

- Fully compatible floating point package including arithmetic, relational, logical and transcendental functions
- Floating point range of 1E+38 to 2E-39
- String extensions including LEFT\$, RIGHT\$, and MID\$
- BCD functions for 10 digit numbers including multiply, divide, and percentage. BCD numbers may be used for DOLLAR.CENTS calculations without the round-off error inherent in BASIC real numbers.
- Special words are provided for inputting and outputting DOLLAR.CENTS values
- Detailed manual with examples and applications screens

(Commodore 64 is a trademark of Commodore)

TO ORDER - Specify disk or cassette version

- Check, money order, bank card, COD's add \$1.50
- Add \$4.00 postage and handling in USA and Canada
- Mass. orders add 5% sales tax
- Foreign orders add 20% shipping and handling
- Dealer inquiries welcome

## PERFORMANCE MICRO PRODUCTS



770 Dedham Street, S-2  
Canton, MA 02021  
(617) 828-1209



Circle No. 93

# FORTH-79

Ver. 2 For your APPLE II/II+

The complete professional software system, that meets ALL provisions of the FORTH-79 Standard (adopted Oct. 1980). Compare the many advanced features of FORTH-79 with the FORTH you are now using, or plan to buy!

FEATURES	OURS	OTHERS
79-Standard system gives source portability.	YES	_____
Professionally written tutorial & user manual	200 PG.	_____
Screen editor with user-definable controls.	YES	_____
Macro-assembler with local labels.	YES	_____
Virtual memory.	YES	_____
Both 13 & 16-sector format.	YES	_____
Multiple disk drives.	YES	_____
Double-number Standard & String extensions.	YES	_____
Upper/lower case keyboard input.	YES	_____
LO-Res graphics.	YES	_____
80 column display capability	YES	_____
Z-80 CP/M Ver. 2.x & Northstar also available	YES	_____
Affordable!	\$99.95	_____
Low cost enhancement option:		
Hi-Res turtle-graphics.	YES	_____
Floating-point mathematics.	YES	_____
Powerful package with own manual, 50 functions in all, AM9511 compatible.		
FORTH-79 V.2 (requires 48K & 1 disk drive)		\$ 99.95
ENHANCEMENT PACKAGE FOR V.2		\$ 49.95
Floating point & Hi-Res turtle-graphics		\$139.95
COMBINATION PACKAGE		
(CA res. add 6% tax: COD accepted)		

## MicroMotion

12077 Wilshire Blvd. # 506  
L.A., CA 90025 (213) 821-4340  
Specify APPLE, CP/M or Northstar  
Dealer inquiries invited.

Circle No. 94



## ATTENTION PROGRAMMERS!!

DATASOFT is currently seeking programs and programmers to add to their rapidly growing and expanding operation. A leading marketer and developer of personal computer software, DATASOFT offers experienced assembly-language programmers the opportunity to join their staff to develop and translate arcade games such as ZAXXON™, as well as to author original material for their games, education and home management product lines. DATASOFT pays competitive salaries, plus bonuses based on product performance. Relocation assistance is available, if needed.

If you have working knowledge of Atari, Apple, TI, or Commodore operating systems, graphics, animation and sound, call or write Melinda Storch at:

**DataSoft Inc.**  
COMPUTER SOFTWARE

9421 Winnetka Ave.  
Chatsworth, CA 91311  
(213) 701-5161 / (800) 423-5916

Circle No. 95

ZAXXON and SEGA are registered trademarks of Sega Enterprises.  
DATASOFT is a registered trademark of Datasoft, inc.

**Skill level required:** Both the novice and the expert can benefit from this product.

**Reviewer:** Chris Williams

**Product Name:** Semi-Draw  
**Equip. req'd:** TRS-80C 32K Extended BASIC  
**Price:** \$21.95  
**Manufacturer:** Computerware  
Box 668  
Encinitas, CA 92024

**Description:** *Semi-Draw* is a graphics development and sketching program for the Color Computer. Pictures can be drawn in three resolutions — Semigraphics 8, 12, or 24. Text can be placed anywhere on the graphics screen. Up to eight colors plus black are allowed, and drawings can be animated by paging through up to six available screens.

**Pluses:** Allows drawings to be made using the joystick or keyboard. Pictures can be stored or retrieved on tape for use with other software or transferred to a Line Printer VII, Line printer VIII, or NEC 8023 printer. Colors are simulated by dot-pattern densities.

**Minuses:** The program is not compatible with the RS disk system.

**Documentation:** A six-page manual is included that describes the operation of the program.

**Skill level requires:** No special skills required.

**Reviewer:** John Steiner

**Product Name:** Earl's Word Power: Horrible Homonyms  
**Equip. req'd:** Apple II or Apple II+  
**Price:** \$29.95  
**Manufacturer:** George Earl  
1302 South General McMullen  
San Antonio, TX 78237

**Author:** Karen Knudson

**Description:** This is an educational program that enables the student to practice the most abused homonyms (their/there/they're, its/it's, too/to/two, etc.). Each homonym is defined and used in an example. Then a sentence missing a word is shown, with the homonyms listed below. Paraphrased Shakespearian plays are used for review tests.

**Pluses:** The program provides instant feedback with the score shown after each problem. When a mistake is made, the program reviews the material and then presents the problem again. The program is completely error-trapped (ignores spurious key entry), and the screen shows large, easy-to-read type. I would recommend this program for school and home.

**Minuses:** The 13 sets of homonyms are fixed; so a teacher cannot insert her own words. The program does not automatically send low scorers back for another review. Also, there is no provision for saving student scores on disk.

**Documentation:** One sheet on loading the disk; all necessary instructions are built into the program.

(continued)

# COMPUTER ACCESSORIES

## ERRORS—DOWNTIME—SERVICE

A speck of dust, dirt, or magnetic oxide on the read/write head of your floppy disk can cause data transfer errors, a disk crash, or even a costly disk drive failure. Regular use of Perfectdata head cleaning diskettes can keep your drive heads clean and your system up and running. The Perfectdata system can be used on single or dual-sided floppy disk drives. (Comes complete with 2 cleaning diskettes, a 4 oz. bottle of CS-85 cleaning solution, and full instructions.)

5.25" Disk Drive Cleaning Kit \$22.75  
8" Disk Drive Cleaning Kit \$22.75

## ORGANIZE AND PROTECT YOUR DISKETTES

Organize your diskettes with an Innovative Concepts Flip 'N' File from Mercury Micro. Holds up to 50 diskettes in a handsome smoke-colored transparent plastic case.

Case for 5.25" Diskettes \$23.75  
Case for 8" Diskettes \$29.75

## WHAT'S YOUR FAVORITE NUMBER?

New for spring. Top quality shirts with "64" or "20" printed in large numerals on both front and back. 50/50 blend **will not shrink**. Specify color and size and number choice. Available in red or blue, S-M-L-XL.

\$7.50 each

## ORDERING INFORMATION

Phone (301) 994-1122

## SHIPPING

Add \$1.50 to all orders for shipping. We pay balance for UPS service on all orders. Add \$2.00 for COD. Maryland residents please add 5% state sales tax.

WRITE OR CALL FOR FREE COMPUTER ACCESSORY CATALOG: SURGE PROTECTORS, DUST COVERS, BOOKS, DISK MAINTENANCE, BLANK MEDIA AND MUCH MORE.




**Mercury Micro Inc.**  
Dept. F  
Cherry Field Road  
Drayden, Md. 20630

Circle No. 96

# UV EPROM ERASER

- \* Erases over 15 EPROMS - 15 minutes erase time
- \* Element life 7700 hours
- \* Intensity: 12W's 1/4cm<sup>2</sup> at 1"
- \* Erases all UV EPROMS (2716, 2732, 2516, 2532, etc.)

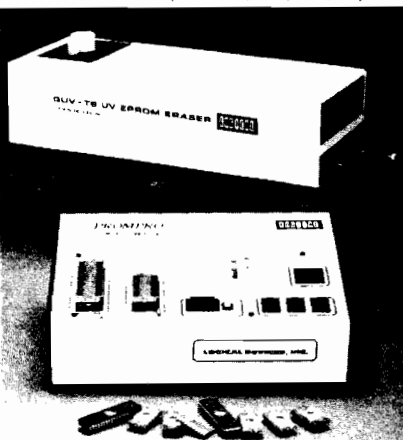

## \$49.95\*

\*HOBBY MODEL

## INDUSTRIAL MODEL

QUV-T8 / 2N

\$68.95

WITH TIMER AND SAFETY SWITCH

QUV-T8 / 2T

\$97.50

## INTELLIGENT PROGRAMMER STAND ALONE RS-232

- \* RELIABLE
- \* EASY COPY (No external equipment needed)
- \* USER FRIENDLY

COMPATIBLE:  
IBM PC, TRS-80, APPLE, CPM, FLEX, TEKTRONICS, MDS

**(MCS-48)**  
PROGRAMMING

PRICE INCLUDES PERSONALITY MODULE

**\$489.00**

SOON TO BE RELEASED:

PROMPRO-8 128K Version \$689.

**MONEY BACK GUARANTEE**

**LOGICAL DEVICES INC.**

781 W. OAKLAND PARK BLVD. • FT. LAUDERDALE, FL 33311

Phone Orders (305) 974-0967 • TWX: 510-955-9496

SEE US AT COMDEX SPRING - BOOTH #3019

Circle No. 97

# NAME BRAND SUPER SALE

Bulk Diskettes\* with envelopes

\*Now Get High Quality at a Low Price Manufactured by a Major Disc Company For MDS Without Their Name on Diskettes \*Minimum order 20 diskettes with Tyvek envelope and storage shipping box \*Quantity Discounts: 100 deduct 3%, 1000 deduct 5%, 10,000 deduct 10%, 100+ Certified 1 Year Warranty

## 5 1/4" Soft Sectors

SINGLE SIDE SINGLE DENSITY W/HUB RING **\$1.69\***

SINGLE SIDE DOUBLE DENSITY W/HUB RING **\$1.99\***

DOUBLE SIDE DOUBLE DENSITY W/HUB RING **\$2.79\***

## 8" Soft or 32 Sectors

SINGLE SIDE SINGLE DENSITY **\$1.79\***

SINGLE SIDE DOUBLE DENSITY **\$2.29\***

DOUBLE SIDE DOUBLE DENSITY **\$3.09\***

## PRINTERS

All EPSONS available ..... \$call  
GEMINI 10 by Star Micronics \$359.00  
GEMINI 15 by Star Micronics \$549.00  
Okidata Microline 80 ..... \$call  
Okidata Microline 82 ..... \$469.00  
Okidata Microline 83A ..... \$call  
Okidata Microline 84 ..... \$call

## MICROBUFFER

MBP-16K Parallel ..... \$149.00  
MICROBUFFER IN-LINE For Most Printers  
32K Parallel ..... \$289.00  
64K Parallel ..... \$339.00  
32K Serial ..... \$289.00  
64K Serial ..... \$339.00  
64K Memory Expansion Modules ..... \$169.00

## TANDON DISK DRIVE ENCLOSURES

Complete with Chassis & Power Supply: Fully assembled silver or beige chassis with external card edge connector for easy cable installation for 5 1/4" drives. With MDS 120 days warranty ..... \$59.00



## BARE DRIVES

TM100 1 40 Trk ..... \$199.00  
TM100 2 40/40 Trk ..... \$269.00  
TM100 4 80/80 Trk ..... \$339.00  
SIEMENS FDD100 8 SS/DD 8 in ..... \$279.00  
TM50 SS DD 40 Trk Thinline ..... \$199.00  
TM84B 1 SS/DD 8" 77 Trk Thinline ..... \$369.00  
TM84B 2 DD/DD 8" 77 Trk Thinline ..... \$479.00

Add \$59.00 For Complete 5 1/4" Drive System



## MCB 1000 High Performance Business System

Includes FREE MicroPro Software: • WordStar • SpellStar  
• MailMerge • CalcStar  
• And More • Z-80A C.P.U.  
• 64KB RAM  
• 328KB mini floppy disk drive  
• CP/M operating system  
• 12" non-glare green phosphor video display screen  
• Centronics parallel printer port  
• RS232C serial port  
• Additional disk: drives up to 2.3MB



**\$1595**  
SAVE \$2000\*

Free shipping on all prepaid orders over \$100.00 in U.S.A.

(\* If purchased separately)

CASH ORDERS ONLY

**MDS MICRO DATA SUPPLIES**

22295 EUCLID AVE.  
EUCLID, OHIO 44117

Call (216) 481-1600

WE ACCEPT  
• Visa  
• MasterCard  
• Checks  
• Money Order  
• C O D

ALL PRICES ARE FOR MAIL ORDER ONLY Prices Specifications and Offerings subject to change without notice

ADD \$3.00 FOR SHIPPING & HANDLING \$6.00 Extra for C O D Orders Ohio Residents add 6.5% Sales Tax

DEALER INQUIRIES WELCOME

Circle No. 98

# Upgrade Your

## With The 6502 Upgrade Kit

BDR  
BBS  
BRA  
PHX  
PHY  
PLX  
PLY  
RMB  
SMB  
STZ  
TRB  
TSB


\$34<sup>95</sup>

**southwestern data systems™**  
10761 Woodside Ave., Suite E • P.O. Box 582 • Santee, CA 92071

Circle No. 99

**dy Jan** **Dysan**  
CORPORATION

better from inside out

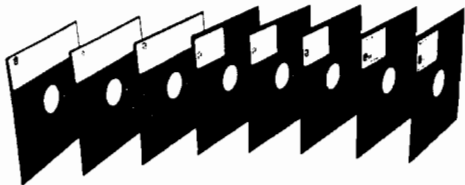

at the lowest price!

Call our Modem Hotline (anytime) - 619-268-4488  
for exclusive monthly specials. Our free catalog  
contains more than 600 fantastic values.

**ABC Data Products**  
(formerly ABM)

8868 CLAIREMONT MESA BLVD.  
SAN DIEGO, CALIFORNIA 92123

ORDERS ONLY    ITT TELEX    INFORMATION  
800-850-1555    4992217    619-268-3537

**Skill level required:** This program is good for anyone with fourth grade-to adult-level English. No programming required.

**Reviewer:** Mary Gasiorowski

**Product Name:** HEXDOS 4.0

**Equip. req'd:** OSI C1P or Superboard with BASIC-in-ROM and disk drive

**Price:** \$49.50 includes diskette and manual

**Manufacturer:** The 6502 Program Exchange  
2920 West Moana

Reno, NV 89509

**Author:** Steven P. Hendrix

**Description:** HEXDOS is a disk-operating system for the OSI C1P system that requires only one disk track and 2K of memory for the DOS. It uses BASIC-in-ROM routines where possible to keep the DOS small.

**Pluses:** A real DOS is possible with as little as 8K of RAM. The user has 38 disk tracks available for storage and approximately 12K more memory than OS65D. The USR routine has been substantially expanded to do many things in addition to calling user-written routines. The "SAVE" command will create a disk file if none exists. File names may be of any length and are allowed to contain embedded blanks. Assembly-language files are uniquely identified and stored with load and execution addresses. Data files may be written and read from BASIC — up to 22 files may be open simultaneously. Opening the file automatically creates the necessary buffer space. The rubout key is now a non-destructive back space. HEXDOS will operate with CEGMON as well as the standard OSI monitor chip. Several hardware enhancements are supported (real time clock, tone generator, etc.). The program appears to be well supported by its author, with updates offered from time to time. Consultation is provided willingly in case of user problems.

**Minuses:** Lack of compatibility with OS65D. Disks created by HEXDOS and OS65D are mutually unreadable. I have an assembly-language routine to read OS65D sectors under HEXDOS, and a BASIC program for copying OS65D files to HEXDOS disks, that I will publish in the next issue of the HEXDOS Newsletter for current users, and include with future purchases of HEXDOS. The changes in the USR mentioned above require that any existing program using USR must be revised to run with HEXDOS. HEXDOS retains most of the features of BASIC-in-ROM, including 7-digit floating-point precision (OS65D now has 9½-digit f.p., - but 7-digit f.p. is faster and uses less memory if the precision is adequate for your work). The notorious garbage collection bug has not been fixed. (In fairness I must point out that a corrected BASIC ROM3 chip is available elsewhere at modest cost.) The smallest unit on disk is a track (i.e., one sector of 2K bytes per track).

**Documentation:** Newly revised 40-page manual, including demonstration programs and appendices. Terse, but apparently complete and error-free.

**Skill level required:** Ability to program in BASIC. No assembly-language experience is needed.

**Reviewer:** Rolf B. Johannesen

**MICRO™**

# HAVE YOU FLOWN YOUR ATARI TODAY?

## FINAL FLIGHT!

Imagine yourself at the controls of a small, single-engine plane, 10,000 feet in the air, on your approach to the runway and safety. You're running low on fuel, but your instruments show that you're on the glide path, and lined up with the runway. It's a beautiful, sunny day, and you can see the airport in the distance, across the grassy fields. But the crosswind is tricky, and it will take all your skill to land safely. You're coming down now, and the runway is getting closer. A bit left, OK, now lower the power, fine, now put down the flaps. Pull the nose up a bit more, you're a little low. Watch the power! Don't stall. OK. Here comes the runway. You hear the squeal of tires on

pavement, your pulse quickens, you're down, but watch it, you're pulling right! Brakes, brakes! Left more! You've stopped safely! Good job. The first real-time flight simulator for ATARI is now available from MMG Micro Software. Written entirely in machine language, there are four levels of difficulty, landings in clear or foggy weather, landings with or without instruments, and with or without the real-time view from the cockpit. **Final Flight!** requires Atari 400/800, 24K, 1 joy stick, and is offered on tape or disk for the same suggested retail price of \$29.95.



MMG

6% sales tax.  
MICRO

### Final Flight!

is available at your local dealer or direct from **MMG Micro Software**. Just send check or money order to P.O. Box 131, Marlboro, N.J. 07746 or for Mastercard, Visa, and C.O.D. deliveries call **(201)431-3472**. Please add \$3.00 for postage and handling. New Jersey residents add

Atari is a registered trademark of Atari, Inc.

Circle No. 101

123



## 6809 Bibliography

### 136. Color Computer News, Issue 14 (November, 1982)

- Sias, Bill, "REMARKS," pg. 3.  
Remarks on the 6809-based color computer of Tandy versus other Tandy micros.
- Kelment, George E., "HEX/DEC Conversion," pg. 10.  
A listing for the TRS-80 Color Computer.
- Benenson, Alexander, "Screen Print Program for the Color Computer," pg. 13.  
A listing and notes on a utility for the Color Computer.
- Perry, Thomas, "CW Send/Receive Program," pg. 14-21.  
An amateur radio utility for the Color Computer.
- Degler, Roger L., "Flex Corner," pg. 24-27.  
A discussion of operating systems for the 6809-based color computer.
- Steiner, John, "Morse Code Instruction: Part 2," pg. 30-32.  
Programmed CW instruction for the TRS-80 Color Computer.
- Hogg, Frank, "64K Korner," pg. 34-36.  
Teletypewriter and FLEX and use of an external terminal.
- Norris, Danny, "Chromaledger," pg. 38-45.  
Chromaledger is an easy-to-use expense account program written for the 32K Extended BASIC Color Computer.
- Pakerski, Andrew, "Tumble," pg. 46-48.  
A game program for the Color Computer.
- McGarry, Donald L., "Slither," pg. 49-52.  
A programming game for the 6809-based Color Computer.
- Aker, Jack L., "Care and Feeding of RS Disk Drives," pg. 54-56.  
Discussion and diagnostic test program for Radio Shack Color Computer disk drives.
- Kelty, John R., "A 'Cheap Talker' for the Radio Shack Color Computer," pg. 58-63.  
Hardware and software for a speech program for the Color Computer.
- Trepal, George, "POKE and String Graphics for the 4K Color Computer," pg. 64-67.  
POKE and string graphics are much faster than SET and RESET graphics.
- Sullivan, Steve, "Slope and Linear Graphing," pg. 68-70.  
A program for graphing various algebraic equations.
- Giovanoni, Richard, "Estimating On My Color Computer," pg. 73-77.  
A program for proposal estimates.
- Anon., "Learning ASCII Codes," pg. 82-83.  
A learning program intended to burn the ASCII codes into your subconscious.
- Knight, Glen B., "How I learned to Soundex Code and Love My Color Computer," pg. 89-91.  
Family names are often spelled various ways. A Soundex code assists in retrieving these names in a computer file.

### 137. System-68, No. 2 (August, 1982)

- Pass, Edgar M., "A Comparison of FLEX and UNIFLEX," pg. 7-19.  
A detailed discussion and comparison of two operating systems for 6800 and 6809 systems.
- Hughes, James, "Dynamic Address Translator," pg. 21-26.  
An explanation of how the 6809 Dynamic Address Translation and Extended Memory Addressing software (SWTPC) work in order to be able to program them for correct operation.

### 138. System-68, No. 4 (November, 1982)

- Pentecost, Joe, "Beginning Assembly Language Programming," pg. 8-28.  
A tutorial to machine-language for the 6800- and 6809-based systems.

### 139. '68' Micro Journal 4 Issue 12 (December, 1982)

- Reitzel, Norman L., "6809 Problems," pg. 10-11.

Discussion of some bugs in the 6809 with low mask numbers, and fixes available.

- Anderson, Ronald W., "FLEX User Notes," pg. 11-14.  
Discussion of the use of 6800 and 6809 programs.
- Nay, Robert L., "Color User Notes," pg. 14-18.  
Discussion of needs filled by the TRS-80 Color Computer; as an advanced system, as an excellent educational tool, and as a very good tool for control systems.
- Kelty, John R., "Cheap Talker," pg. 18-19.  
A speech program for the 6809-based Color Computer.
- Hunt, Thomas H., "Hi-Res Color Graphics," pg. 19-22.  
Arcade graphics by adding a special TMS-9918A and some other chips to your 6809-based system.
- Lyon, Stewart D., "Adapting the Microworks SDS80C to FLEX09 DOS," pg. 22-24.  
Detailed instructions for system modification, including an assembly-language listing.

### 140. The Rainbow 1, No. 6 (December, 1982)

- Nolan, Sara, "Micro-Maestro," pg. 10-28.  
Using the 6809-based Color Computer's PLAY statement.  
How to program music on the micro.
- Schrag, Roger, "Patch EDTASMplus to Disk to End Those Cassette Blues," pg. 29-32.  
How to modify the EDTASMplus package to support disk drives on the Color Computer.
- Stumpf, Peter, "You'll Log This Program for Holiday Merriment" pg. 34-36.  
Graphics for a fireplace complete with glowing flame and stockings hung with care.
- Inman, Don, "High-Resolution Graphics Techniques Are Explained," pg. 41-48.  
A tutorial with several demo listings for the 6809-based Color Computer.
- Nolan, Bill, "Pressed for Time? Paint a Dungeon!" pg. 50-52.  
How to speed up the actual play of a fantasy game by properly using the 6809 graphics ability.
- Hands, Lester, "Memory Exam: Where Does it Start?" pg. 54-55.  
A machine-language utility routine that allows you to rapidly examine memory and determine the address of items of interest.
- Blyn, Steve, "Sustain Children's Interest By Expanding Relevance," pg. 56-60.  
Motivating the young computer user to go beyond games and learning programs. A sample listing is included.
- Kolar, Joseph, "On Printing Alphanumerics in Eight Directions," pg. 62-64.  
A program to allow printing in any of the eight motion directions as used in the Color Computer's DRAW command.
- Benenson, Alexander, "Screen Print Program for the Color Computer," pg. 13.  
A listing and notes on a utility for the Color Computer.
- Konecky, Larry, "This Is Just Like Music to Your Eyes," pg. 66-72.  
In this Color Computer program music can be written and presented on a music staff on a black background.
- Bennett, J.E. and Laidlaw, "From Out of the Blue Comes This Dexterity Test," pg. 76-80.  
A parachute drop game for the Color Computer.
- Roslund, Charles J., "Format Your LLISTings with FLIST," pg. 86.  
A formatting utility machine-language routine for the 6809-based Color Computer.
- Wells, Geoff, "Go Adventuring with GAPAD," pg. 98-104.  
A game-writing utility for the TRS-80 Color Computer.

# MEGAFLEX<sup>®</sup>

# ABILITY

## *You Pick The Disk System, MegaFlex Controls It!*

### WITH SOFTDRIVERS FOR A FLEXIBLE FUTURE!


MEGAFLEX—a universal floppy disk controller and modern alternative to the Apple drive system offering increased storage, improved reliability and . . . FLEXIBILITY.

Enjoy megabytes of online storage with your choice of micro, mini, or maxi drives—or even 6Mb with the Amlyn cartridge pack! Ideal for high-capacity storage now, winchester-disk backup later.

The MEGAFLEX secret is to autoboot soft-drivers that match the needs of your drive system. All hardware functions are software-controlled. MEGAFLEX can match new drive capabilities without hardware changes. Drive-dependent ROMs have been eliminated.

### APPLE III? OF COURSE!!

MEGAFLEX is compatible with BASIC, CP/M, Pascal, VISICALC, SOS and DOS-emulation on the Apple III, Apple II, Franklin Ace and Basis. All language features and operating system commands (LOAD, BRUN, etc.) are standard. If you can operate Apple drives you can operate MEGAFLEX! Your Apple software will run without modification too.

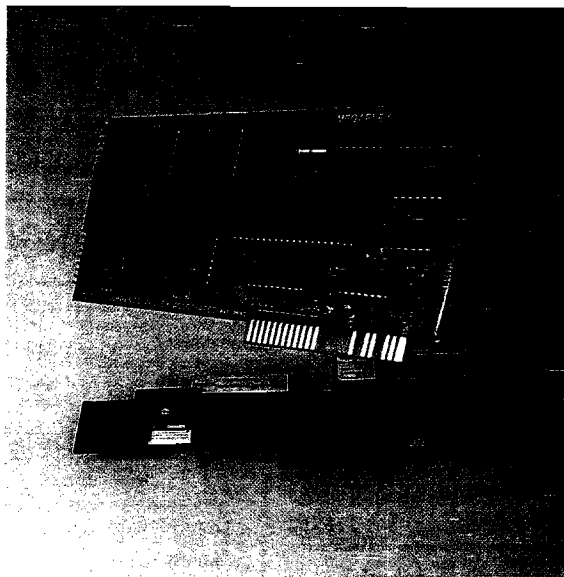

### BRIDGE THE APPLE FORMAT BARRIER!

The MEGAFLEX diskette does what Apple's cannot—read and write diskettes from other computers! Software-controlled industry-standard IBM 3740 or System 34 type formats allow the MEGAFLEX library of reformatting software to read and write Altos, Radio Shack, Osborne, and IBM PC diskettes. (Call for the latest software details.)

### MORE STORAGE, MORE

### UNIVERSAL FEATURES, LOWEST COST

MEGAFLEX with 8" maxi or high density 5.25" minis gives you 1.2 Megabyte of formatted data per diskette for 8 times the file and data size!

MEGAFLEX offers flexible software choices:

- data rate (250/500 Kbits per second),
- single and double density recording, and
- single/double sided drive operation (max 4 drives).

MEGAFLEX has the lowest chip count of any controller today! This means less power, a cooler Apple and better reliability.

Lowest price, highest performance, that's

MEGAFLEX!

# MEGABYTER<sup>™</sup>

A Division of SVA

TRADEMARKS CP/M—Digital Research

11722 SORRENTO VALLEY ROAD  
SAN DIEGO, CA  
(619) 452-0101  
TWX 910-335-2047 APPLE TWO SDG

# the ACCESS UNLIMITED MICRO SHOPPING CENTER

## NEW PC-POWER PACK™ FOR IBM-PC™

Two microcomputer industry leaders, Digital Research Inc. and Percom Data Corp. has agreed to produce "PC-POWER PACK"™, a complete package consisting of a Percom Data Winchester 5 1/4" Hard Disk Drive, a 256K RAM board and controller, and Digital Research's Concurrent CP/M-86™, the single-user, multitasking operating system. The PHD™ System provides plug-in compatibility to the "IBM-PC", and speed and accuracy many times that of floppy systems. Storage capacity of the Percom Data Hard Disk ranges from 5 to 30 megabytes. **CALL FOR PRICE.**

## Access Unlimited Hard Disk Drives For TRS-80\*, "IBM-PC", "APPLE II"

- 5, 10, 15 Megabyte and larger drive units.
- Lets controller handle up to 4 drives.
- Works along with existing floppy disk drives.
- Includes host system support software.

From  
**\$1395.00**  
(5MB)  
For TRS-80

## Your present system too small?

Take advantage of the iBEX company business system and stand alone word processing systems — overbuild mistake-model No. 7202 Regular retail \$9070.00 with software **Now for a limited time only \$2595.00** — while supply lasts

## Look what you get for \$2595

- Z80 • CP/M compatible
- 64 kilobyte RAM 4KB RAM
- Dual 8" floppies (total 2.4 Million Characters)
- Switchable to IBM 3740 format
- 12" green phosphor monitor (80 x 24, 40 x 24, 32 x 14 characters)
- Centronics compatible printer interface

F.O.B. Dallas, TX

- Serial interface
- Full function keyboard
- Clock timer and calendar w/battery
- **Over \$2200 in Free software:** CP/M Operating System, M/Basic Interpreter, Perfect Writer, Perfect Speller, Perfect Calc, Perfect Filer

## • SPECIALS OF THE MONTH:

### • NEW "Star Gemini" Printer

Dot Matrix Model 10 — Reg. \$499.00 Sale **\$369.90**  
100 CPS Model 15 — Reg. Retail \$699.00 Sale **\$525.00**

### • NEW "C-ITOH F-10 Starwriter" Printer

Reg. Retail \$2295.00 Sale **\$1595.00**

## CLOSEOUT: "Brother" HR1 Daisywheel Printer

Serial — Closeout Sale **\$799.00** Parallel — Closeout Sale **\$745.00**

## "Perfect" Software For "IBM-PC" or 8" CP/M

"Perfect Writer" Reg. Retail \$495.00 Sale **\$299.90**  
"Perfect Filer" Reg. Retail \$595.00 Sale **\$309.90**  
"Perfect Calc" Reg. Retail \$295.00 Sale **\$159.90**  
"Perfect Speller" Reg. Retail \$295.00 Sale **\$159.90**

All Four Fully Integrated Reg. Retail \$1680.00 Sale **\$849.90**

## New! Dual Headed Drives for the Price of Floppies!

Now you can have a "dual headed" "PERCOM" Drive System for your TRS 80 Model III!!!

TFD344N1 One Drive dual headed double-density **\$560.00**  
TFD344N2 Two disk dual headed double-density **\$860.00**

\*completely compatible with programs existing on single sided or double sided diskettes.

## "Percom Data" Drives For "Atari"

Access single density drives. 102k storage but much cooler, quieter and more efficient than the 810! Our flexible drives let you cable your first-drive system directly into your computer. Or go through an 810 drive. And our Access controllers automatically handle single- and double-density drives in the same system.

AT88-S1 First drive single density **\$478.00**  
AT88-A1 Add on drive single density **\$339.00**  
RFD40-S1 First drive double density **\$599.00**  
RFD40-A1 Add on drive double density **\$349.00**  
RFD44-S1 First drive double sided **\$729.00**  
ATARISEP Data separator for 810 drive **\$ 24.95**

**BUY DUAL UNITS — FOR EVEN BIGGER SAVINGS!**

## Bare Drives for "IBM-PC" — Internal

Single Head 160K — **\$279.95**  
Dual Head 320K — **\$354.95**

## "Percom" Drives For "IBM-PC" External

Single Head 160K — **\$415.95 Includes Case**  
Dual Head 320K — **\$510.95 & Power Supply**

## MODEMS

"U.S. Robotics" Auto Dial 212A Reg. \$599.00 — Now **\$549.00**  
300/1200 baud, totally "Hayes" compatible  
"U.S. Robotics" Auto Link 300 Reg. \$219.00 — Now **\$169.00**  
"Signalman" Auto Answer 0-300 baud From **\$99.00**

## MEDIA FOR LESS — Save \$\$

### BASF 5 1/4" Lifetime Limited Warranty

Single sided Double density Reg. \$44.95 **\$24.90** bx of 10  
Double sided Double density **\$31.90** bx of 10

### SENTINAL complete with hub rings & lifetime warranty

Single sided Single density **\$18.80** bx of 10  
Single sided Double density **\$20.70** bx of 10  
Double sided Double density **\$27.80** bx of 10

### MAXELL

Single sided Single density 5 1/4" **\$36.95** bx of 10  
Double sided Double density 5 1/4" **\$49.95** bx of 10

### MEMOREX

Single sided Single density 5 1/4" **\$32.95** bx of 10  
Double sided Double density 5 1/4" **\$48.95** bx of 10

## Buy Diskettes In Bulk & SAVE !! ...

Single sided Single density Only **\$179.95**/case of 100  
Envelopes Available At **\$.15** Each

Reg. Trademarks - Limited Time Offer/Limited Quantities - Prices subject to change without notice - Prices do not include state taxes



**1 (800) 527-3475**



Order by phone or by mail. We accept Visa, MasterCard, cashier's checks, certified checks, and money orders. With personal checks, allow additional time for bank clearance. Your bankcard will not be charged until your order is shipped. On orders over \$1,000, we pay freight (surface only) and insurance; please add \$3.00 shipping and handling under 50 lbs. Over 50 lbs., add \$5.00 for orders under \$1,000.00. Texas residents add 5% sales tax. Allow 2 to 4 weeks for delivery.

- YES, I'm taking advantage of your Sales Prices.
- Please send me a FREE catalog. I'm not ready to order at this time.

Name \_\_\_\_\_

Company Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone Number (\_\_\_\_) \_\_\_\_\_

Quantity	Item	Unit Price	Subtotal

Check one: State Sales Tax (Texas residents only)

payment enclosed  handling charge

Visa  MasterCard\* Total

\_\_\_\_\_

\*If Master Card, Expiration Date: \_\_\_\_\_

Authorized signature, if charged \_\_\_\_\_

**ACCESS UNLIMITED**

DEPT. N-7/401 N. Central Expwy./Richardson, Texas 75080

Tel. 1-800-527-3475 214/340-5366

214/690-0207 — Sat. and Evenings Only



# FOR YOUR APPLE II

## Industry standard products at super saver discount prices

### SOFTWARE

ARTSCI	List	SGC
Magicalc .....	\$149.00	\$ 99.00
Magic Window II .....	149.00	99.00
DBase (Apple) .....	695.00	475.00
<b>BRODERBUND</b>		
Payroll .....	\$395.00	\$295.00
Choplifter .....	34.95	25.00
Arcade Machine .....	44.95	29.95
Serpentine .....	34.95	25.00
Home Accountant .....	74.95	55.00
Home Accountant Plus .....	150.00	109.00
<b>DATAMOST</b>		
Snackattack .....	\$ 29.95	\$ 22.50
Thief .....	29.95	22.50
Swashbuckler .....	34.95	24.95
Zork I, II, or III .....	39.95	27.95
Starcross .....	39.95	27.95
Format II .....	250.00	175.00
System Saver & Fan .....	59.95	49.00
Multiplan .....	275.00	199.00
<b>ON LINE</b>		
Mystery House .....	\$ 24.95	\$ 19.95
Cranston Mannor .....	34.95	24.95
Frogger .....	34.95	24.95
Screen Writer II .....	129.95	99.95
Memory Management II .....	49.95	39.95
<b>PEACHTREE</b>		
GL, AR, AP .....		
Inventory, Payroll .....	ea. \$400.00 ea.	\$295.00
Micro Buffer II .....	299.00	249.00
<b>SENSIBLE SOFTWARE</b>		
Super Disk Copy III .....	\$ 29.95	\$ 22.95
DOS Plus .....	24.95	17.95
<b>SERIUS SOFTWARE</b>		
Bandits .....	\$ 34.95	\$ 26.95
Epoch .....	34.95	26.95
Fly Wars .....	29.95	22.95
Gorgon .....	39.95	29.95
Sneakers .....	29.95	22.95
Joy Port .....	74.95	59.95
Wizardry .....	49.95	34.95
Night of Diamonds .....	34.95	26.95
Star Maze .....	34.95	26.95
PFS .....	125.00	89.95
PFS Report .....	95.00	69.95
PFS Graph .....	125.00	89.95
Data Capture 4.0 .....	64.95	49.95
Merlin/Assembly Lines .....	119.95	89.95
Merlin .....	64.95	49.95
ASCII Express Pro .....	129.95	99.95
Transend II .....	149.00	119.00
Transend I .....	89.00	65.00
DB Master .....	229.00	165.00
DB Utility Pack .....	99.00	79.00
<b>STRATEGIC SIMULATION</b>		
All Software .....	\$ 59.95	\$ 39.95
All Software .....	39.95	27.95
<b>SYNERGISTIC SOFTWARE</b>		
Wilderness & Dungeon .....	\$ 32.50	\$ 24.95
GPLe .....	64.95	49.95
TG Joystick .....	59.95	45.00
Select-A-Port .....	59.95	45.00
Wordstar .....		325.00
Spellstar .....		175.00
SuperCalc .....		175.00
VisiCalc .....		179.00

## SPECIAL AND NEW

### FRANKLIN ACE 1000 COMPUTER

Hardware and Software compatible with Apple II ..... \$950

FRANKLIN ACE 1000 COMPUTER plus DISK DRIVE, CONTROLLER, and MAGICALC ..... \$1,250

### EXPAND-A-RAM™ PLUS MAGICALC™

Everything that Visicalc™ can do and much more — plus additional memory. Fully compatible with Visicalc. Includes DOS, CP/M, Pascal Disk Emulator. No preboot or Apple modification required.

64K EXPAND-A-RAM plus MAGICALC ..... \$375

128K EXPAND-A-RAM plus MAGICALC ..... \$449

### APPLEurance II™

Diagnostic Disk Controller and System Assurance Package. Standard disk controller plus automatic check of system hardware ..... \$99

### 5¼" DISK DRIVE

Use with either standard Apple II disk drive or APPLEurance II ..... \$249

### GRAPHITTI CARD

Prints HIREs page 1 or 2 from onboard firmware. Features: True 1:1 aspect ratio, prints emphasized mode, reverse mode, rotates 90 degrees ... plus more. Compare all this with the Grappler. We think you'll agree that this is the best graphics card on the market. Specify for use with EPSON, NEC-8023, C-ITOH Prowriter, or Okidata. (List: \$125) ..... \$89

### PARALLEL PRINTERS

#### NEC 8023 or C-ITOH 8510

(Virtually identical) Specifications: • 100 CPS dot matrix printer • 80 column print—136 characters per line • Tractor/friction feed • 7 different print fonts included • 2K printer buffer • Proportional spacing • Bit image graphics and graphic symbols.

NEC 8023 or C-ITOH ..... \$475

NEC 8023 or C-ITOH 8510 with Parallel Interface and Cable ..... \$550

EPSON 100 with Parallel Interface and Cable ..... \$775

BROTHER Daisywheel Printer ..... \$895

### VERSACard FROM PROMETHEUS

Four cards on one! With true simultaneous operation. Includes: (1) Serial Input/Output Interface, (2) Parallel Output Interface, (3) Precision Clock/Calendar, and (4) BSR Control. All on one card. Fully compatible with CP/M\* and Apple Pascal\*. (List: \$249) ..... \$169

### WORD PROCESSING SPECIAL WITH WORDSTAR AND SUPERCALC!

Do professional word processing on your APPLE. All necessary hardware and software included. Complete 80 column video display, enhanced character set, 16K memory board, Z-Card with CP/M\* software, Wordstar and word processing software and SuperCALC.

(List: \$1,228) ... **Special at \$795**

Z-80 CARDS	List	SGC
Microsoft Softcard Z-80 .....	\$399.00	\$289.00
ALS Synergizer .....	749.00	595.00
U-Z-80 Processor Board .....		125.00
Microsoft+Premium Syst. .....		595.00

### 80-COLUMN CARDS

Smarterm 80-Col Display .....	\$345.00	\$225.00
Smarterm Expanded Character Set .....		40.00
Combination Smarterm & Exp. Char. Set .....		260.00
Videx Videoterm .....		275.00
Videx Enhancer II .....	149.00	125.00
Videx VisiCalc Preboot .....	49.95	45.00

### MODEMS FOR YOUR APPLE II

Hayes Smartmodem 300 .....		\$229.00
Hayes Smartmodem 1200 .....	699.00	550.00
Micromodem II .....		279.00
Hayes 100 Baud .....		Call
Apple Cat II .....	389.00	299.00
D Cat Modem .....	199.00	175.00

### MONITORS

Amdek 300G Green .....		\$159.00
Color—Taxam RGB with Interface .....		395.00

### PARALLEL INTERFACE

Centronics Compat. PRT-1 .....		\$ 69.00
--------------------------------	--	----------

### JOYSTICK

Replaces two Apple Paddle Controllers .. \$ 59.00		\$ 39.00
---	--	----------

### FUNCTION STRIP

..... \$ 79.00		\$ 65.00
----------------	--	----------

### MEMORY EXPANSION

Prometheus 16K RAM Module complete .....	\$169.00	\$ 65.00
--	----------	----------

### 5¼" FLOPPY DISKS

Box of 10 with hub rings		
With other purchase .....		\$ 19.95
Without other purchase .....		23.00

All equipment shipped factory fresh. Manufacturers' warranties included. California customers add 6½% tax. Include payment by personal check, money order, or cashier's check with order and SGC will pay shipping charge. Call for amount of shipping charge when paying by credit card.

**All items are normally in stock**

**(415) 490-3420**

... And we'll be here to help after you receive your order. Feel free to call the SGC Technical Staff for assistance.



# SGC

**The mail order specialists**

342 Quartz Circle, Livermore, CA 94550

# Advertiser's Index

AB Computers.....	30	Micro Data Supplies.....	121
ABC Data Products.....	122	Micro House.....	3
Access Unlimited.....	126	Micro Motion.....	120
Acorn Software Systems.....	14	Micro Spec.....	86
Alternative Energy Products.....	103	Microware Distributing.....	79,117
Amdek.....	6	Midnight Software.....	118
Amplify.....	86	Midwest Micro.....	37
Anthro-Digital Software.....	44	Mind Systems Corporation.....	57
Apple Tree Electronics.....	111	MMG.....	123
Arbutus Total Soft.....	91	Modular Mining Systems.....	63
Ark Computers.....	22	Modular Systems.....	117
Armadillo Software.....	2	Monarch Data Systems.....	49
Artisan Software.....	87	Moore Business Centers.....	113
Aurora Software.....	11	Ohio Computer Camp.....	118
Avant-Garde.....	68	Omega Sales.....	21
Boulder Logical Testing Inc.....	108	Performance Micro Products.....	119
Check-Mate.....	93	Perry Peripherals.....	75
Commander Magazine.....	103	P M I Associates.....	106
CompuSense.....	11,12,13,31,45,112	Protecto Enterprises.....	50
CompuTech.....	111	Pterodactyl Software.....	14
Compu-Way.....	75	RH Electronics.....	62,67
Computer Case Co.....	7	Richvale.....	61
Computer Entrepreneur.....	77	Rock Roy.....	Cover II
Computer Mail Order.....	108,109	Sage Computer Technology.....	9
Computer Marketing.....	39	Scientific Software.....	15
Computer Science Engineering.....	100	S G C.....	127
Custom Computer Systems.....	66	S J B Distributors.....	17
Datamost, Inc.....	59,110	Skyles Electric Works.....	19
DataSoft, Inc.....	120	Software T' Boot.....	119
Design Dynamics.....	80, 113	Sorrento Valley Assoc.....	125
D & N Micro.....	105	Southwestern Data Systems.....	122
Don't Ask Software.....	25	Specialty Electronics.....	57
Eastern House Software.....	41	Spectrum Projects.....	117
Excert.....	91	Stellation II.....	103
Execom, Inc.....	15	Strom Systems Inc.....	81
Foxfire Systems.....	13	Talbot Microsystems.....	116
Granite Computer Sales.....	92	Taylor-made Software.....	92
Hollywood Software.....	40	Thunderhawk.....	86
Howard Sams.....	107	Toumayan & Assoc.....	44
I J G.....	49	Unique Data Systems.....	102
In Home Software.....	1	Victory Software.....	85
Intec Peripherals.....	116	Vista Computing.....	Cover III
Interesting Software.....	79	Winders & Geist Inc.....	104
Ironside Computer.....	96	Zytrex.....	12
J & M Software.....	49		
John Bell Engineering.....	97		
Leading Edge.....	Cover IV		
Logical Devices.....	121		
Manx Software.....	112		
Mercury Micro Inc.....	121		

MICRO Advertising  
What's Where in the Apple..... 48

*MICRO INK is not responsible for claims made by its advertisers. Any complaint should be submitted directly to the advertiser. Please also send written notification to MICRO.*

## National Advertising Representatives

### Middle Atlantic and Southeastern States:

Dick Busch Inc.

**Richard V. Busch**

6 Douglass Dr., R.D. #4,  
Princeton, NJ 08540 (201) 329-2424

Dick Busch, Inc.

**Eleanor M. Angone**

74 Brookline,  
E. Atlantic Beach, NY 11561 (516) 432-1955

*serving: New York, Pennsylvania, New Jersey, Delaware, Maryland, West Virginia, Virginia, D.C., North Carolina, South Carolina, Louisiana, Tennessee, Mississippi, Alabama, Georgia, and Florida*

### West Coast:

The R.W. Walker Co., Inc.

**Gordon Carnie**

2716 Ocean Park Boulevard, Suite 1010,  
Santa Monica, California 90405 (213) 450-9001

*serving: Washington, Oregon, Idaho, Montana, Wyoming, Colorado, New Mexico, Arizona, Utah, Nevada, California, Alaska, and Hawaii (also British Columbia and Alberta, Canada)*

### Mid-West Territory:

Thomas Knorr & Associates

**Thomas H. Knorr, Jr.**

33 N. Michigan Avenue, Suite 403  
Chicago, Illinois 60601 (312) 726-2633

*serving: Ohio, Oklahoma, Arkansas, Texas, North Dakota, South Dakota, Nebraska, Kansas, Missouri, Indiana, Illinois, Iowa, Michigan, Wisconsin, and Minnesota.*

# Vista Da Vinci

## GREAT INNOVATORS




15th century renaissance man, Leonardo Da Vinci, contributed an inexhaustible collection of inventions and ideas to solve the world's problems. These ideas were centuries ahead of their time. The studies on this page deal with experiments in manned flight.

Like Leonardo, Vista Computer is answering many of today's complex computer storage problems. The Vista V1200 is a great solution to Apple II™ storage. Mass storage for your Apple II™ Computer has always been a problem. On one hand, there were the exotic, expensive hard disks with no cost efficient means of backup. On the other hand, the Apple floppy drive lacked the speed and storage demanded by today's professionals.

Vista's V1200 offers both at an incredibly attractive price. The removable VistaPak cartridges offer 6 Megebytes of removable storage each and can be backed up like a floppy.

Now hard disk storage and speed can be yours with the added capability of interchangeable media. The V1200 eliminates

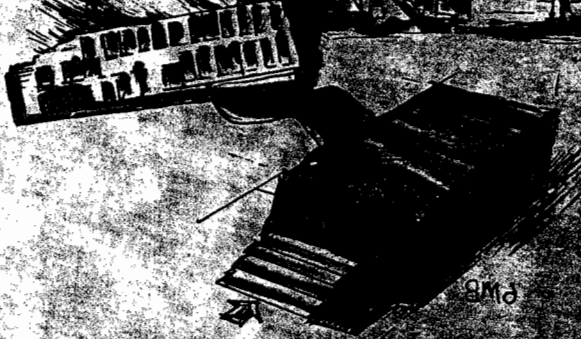

the worries of head crashes, drive alignments, lost data, or backup with a new application of field-proven floppy technology.

The VistaPak cartridges hold 6MB of formatted data each. The removable cartridge allows you to keep duplicates of your valuable data as well as to keep separate packs for your accounting, word processing, spread sheet and other applications. No other storage device offers more in flexibility and capability.


- Microprocessor controlled drive • DMA Controller • Removable Data Cartridges • CP/M, DOS & Pascal compatible • Quickcharge™, DOS enhancement included • Includes 1 VistaPak cartridge • Vista 120 Day Warranty

Contact Your Local Vista Dealer or Call our Vista Hotline

# Vista COMPUTER COMPANY, INC.

111 East 41st St. • New York, NY 10017  
 (212) 696-0515 • (800) 474-3017

For a complete list of Vista dealers, write to Vista Computer Company, Inc., Dept. 100, 111 East 41st St., New York, NY 10017.  
 Federal Office: (212) 696-0515 • Northeast Region: (800) 474-3017  
 South Central: (415) 385-8885

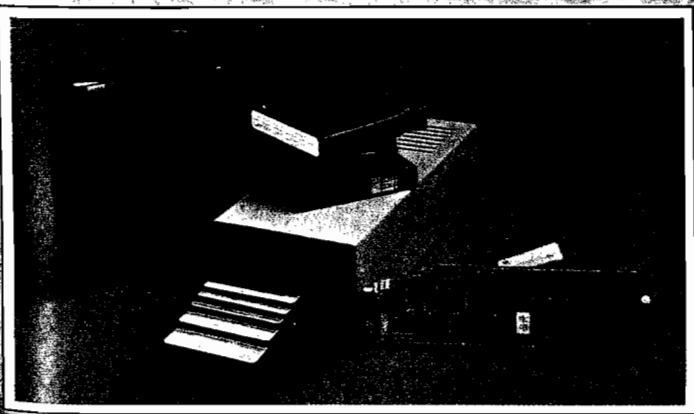

Vista V1200

Apple II is a registered trademark of Apple Computer Co.